



16-Bit, Single Channel DIGITAL-TO-ANALOG CONVERTER With Internal Reference and Parallel Interface

FEATURES

- LOW POWER: 150mW Maximum
- +10V INTERNAL REFERENCE
- UNIPOLAR OR BIPOLAR OPERATION
- SETTLING TIME: 5 μ s to \pm 0.003% FSR
- 16-BIT MONOTONICITY, -40° C TO $+85^{\circ}$ C
- \pm 10V, \pm 5V OR +10V CONFIGURABLE VOLTAGE OUTPUT
- RESET TO MIN-SCALE OR MID-SCALE
- DOUBLE-BUFFERED DATA INPUT
- INPUT REGISTER DATA READBACK
- SMALL LQFP-48 PACKAGE
- SUPPORTS TRANSPARENT DATA INPUT OPERATION


APPLICATIONS

- PROCESS CONTROL
- ATE PIN ELECTRONICS
- CLOSED-LOOP SERVO CONTROL
- MOTOR CONTROL
- DATA ACQUISITION SYSTEMS

DESCRIPTION

The DAC7742 is a 16-bit Digital-to-Analog Converter (DAC) that provides 16 bits of monotonic performance over the specified operating temperature range and offers a +10V, low-drift internal reference. Designed for automatic test equipment and industrial process control applications, the DAC7742 output swing can be configured in a \pm 10V, \pm 5V, or +10V range. The flexibility of the output configuration allows the DAC7742 to provide both unipolar and bipolar operation by pin strapping. The DAC7742 includes a high-speed output amplifier with a maximum settling time of 5 μ s to \pm 0.003% FSR for a 20V full-scale change and only consumes 100mW (typical) of power.

The DAC7742 features a standard 16-bit parallel interface with double buffering to allow asynchronous updates of the analog output, and data read-back to support data integrity verification prior to an update. A user-programmable reset control allows the DAC output to reset to min-scale (FFFF_H) or mid-scale (7FFF_H) overriding the DAC register values. The DAC7742 is available in an LQFP-48 package and three performance grades specified to operate from -40° C to $+85^{\circ}$ C.

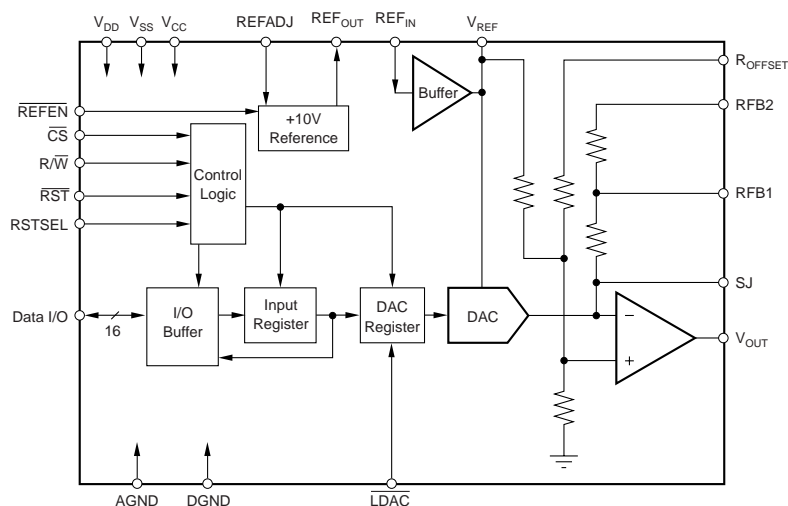

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

| | |
|--------------------------------------|--------------------------|
| V_{CC} to V_{SS} | -0.3V to +32V |
| V_{CC} to AGND | -0.3V to +16V |
| V_{SS} to AGND | -16V to +0.3V |
| AGND to DGND | -0.3V to +0.3V |
| REF _{IN} to AGND | 0V to $V_{CC} - 1.4V$ |
| V_{DD} to DGND | -0.3V to +6V |
| Digital Input Voltage to DGND | -0.3V to $V_{DD} + 0.3V$ |
| Digital Output Voltage to DGND | -0.3V to $V_{DD} + 0.3V$ |
| Operating Temperature Range | -40°C to +85°C |
| Storage Temperature Range | -65°C to +150°C |
| Junction Temperature | +150°C |

NOTE: (1) Stresses above those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. Exposure to absolute maximum conditions for extended periods may affect device reliability.



ELECTROSTATIC DISCHARGE SENSITIVITY

This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

PACKAGE/ORDERING INFORMATION

| PRODUCT | LINEARITY ERROR (LSB) | DIFFERENTIAL NONLINEARITY (LSB) | PACKAGE-LEAD | PACKAGE DESIGNATOR ⁽¹⁾ | SPECIFIED TEMPERATURE RANGE | ORDERING NUMBER | PACKAGE MARKING | TRANSPORT MEDIA, QUANTITY |
|---------|-----------------------|---------------------------------|--------------|-----------------------------------|-----------------------------|-----------------|-----------------|---------------------------|
| DAC7742 | ±6 | ±4 | LQFP-48 | PT | -40°C to +85°C | DAC7742Y/250 | DAC7742Y | Tape and Reel, 250 |
| " | " | " | " | " | " | DAC7742Y/2K | " | Tape and Reel, 2000 |
| DAC7742 | ±4 | ±2 | LQFP-48 | PT | -40°C to +85°C | DAC7742YB/250 | DAC7742YB | Tape and Reel, 250 |
| " | " | " | " | " | " | DAC7742YB/2K | " | Tape and Reel, 2000 |
| DAC7742 | ±3 | ±1 | LQFP-48 | PT | -40°C to +85°C | DAC7742YC/250 | DAC7742YC | Tape and Reel, 250 |
| " | " | " | " | " | " | DAC7742YC/2K | " | Tape and Reel, 2000 |

NOTE: (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at www.ti.com.

ELECTRICAL CHARACTERISTICS

All specifications at $T_A = T_{MIN}$ to T_{MAX} , $V_{CC} = +15V$, $V_{SS} = -15V$, $V_{DD} = +5V$, Internal reference enabled, unless otherwise noted.

| PARAMETER | CONDITIONS | DAC7742Y | | | DAC7742YB | | | DAC7742YC | | | UNITS |
|--|--|----------|------------|----------------|-----------|-----|--------|-----------|-----|------|----------|
| | | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | |
| ACCURACY | | | | | | | | | | | |
| Linearity Error (INL) | $T_A = 25^\circ C$ | | | ±6 | | | ±4 | | | ±3 | LSB |
| Differential Linearity Error (DNL) | | | | ±5 | | | ±3 | | | ±2 | LSB |
| Monotonicity | | 14 | | ±4 | 15 | | ±2 | 16 | | ±1 | LSB |
| Offset Error | | | | ±0.1 | | | * | | | * | % of FSR |
| Offset Error Drift | | | ±2 | | | * | | * | | * | ppm/°C |
| Gain Error | With Internal REF | | | ±0.4 | | | ±0.25 | | | ±0.2 | % of FSR |
| | With External REF | | | ±0.25 | | | ±0.1 | | | * | % of FSR |
| Gain Error Drift | With Internal REF | | ±15 | | | ±10 | | | ±7 | | ppm/°C |
| PSRR (V_{CC} or V_{SS}) | At Full-Scale | | 50 | 200 | | * | * | | * | * | ppm/V |
| ANALOG OUTPUT⁽¹⁾ | | | | | | | | | | | |
| Voltage Output ⁽²⁾ | +11.4/-4.75 | | 0 to 10 | | | * | | | * | | V |
| | +11.4/-11.4 | | ±10 | | | * | | | * | | V |
| | +11.4/-6.4 | | ±5 | | | * | | | * | | V |
| Output Current | | ±5 | | | * | | | * | | | mA |
| Output Impedance | | | 0.1 | | | * | | * | | | Ω |
| Maximum Load Capacitance | | | 200 | | | * | | * | | | pF |
| Short-Circuit Current | | | ±15 | | | * | | * | | | mA |
| Short-Circuit Duration | AGND | | Indefinite | | | * | | * | | | |
| REFERENCE | | | | | | | | | | | |
| Reference Output | | 9.96 | 10 | 10.04 | 9.975 | * | 10.025 | * | * | * | V |
| REF _{OUT} Impedance | | | 400 | | | * | | * | * | | Ω |
| REF _{OUT} Voltage Drift | | | ±15 | | | ±10 | | | ±7 | | ppm/°C |
| REF _{OUT} Voltage Adjustment ⁽³⁾ | | ±25 | | | * | | * | * | | | mV |
| REF _{IN} Input Range ⁽⁴⁾ | | 4.75 | | $V_{CC} - 1.4$ | * | | * | * | | * | V |
| REF _{IN} Input Current | | | 10 | | * | * | | * | * | | nA |
| REFADJ Input Range | Absolute Max Value that can be applied is V_{CC} | 0 | | 10 | * | | * | * | * | | V |
| REFADJ Input Impedance | | | 50 | | | * | | * | * | | kΩ |
| V_{REF} Output Current | | -2 | | +2 | * | | * | * | * | | mA |
| V_{REF} Impedance | | | 1 | | | * | | * | * | | Ω |

ELECTRICAL CHARACTERISTICS (Cont.)


All specifications at $T_A = T_{MIN}$ to T_{MAX} , $V_{CC} = +15V$, $V_{SS} = -15V$, $V_{DD} = +5V$, Internal reference enabled, unless otherwise noted.

| PARAMETER | CONDITIONS | DAC7742Y | | | DAC7742YB | | | DAC7742YC | | | UNITS |
|--|---|------------------------------------|----------|-----------------------------------|-----------|-----|-----|-----------|-----|-----|---|
| | | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | |
| DYNAMIC PERFORMANCE Settling Time to $\pm 0.003\%$ | 20V Output Step $R_L = 5k\Omega$, $C_L = 200pF$, with external REF_{OUT} to REF_{IN} filter ⁽⁵⁾ | | 3 | 4 | | * | * | | * | * | μs |
| Digital Feedthrough Output Noise Voltage | at 10kHz | | 2 100 | | | * | * | | * | * | $\frac{nV \cdot s}{nV/\sqrt{Hz}}$ |
| DIGITAL INPUT V_{IH} V_{IL} Input Coding | $ I_{IH} < 10\mu A$ $ I_{IL} < 10\mu A$ | $0.7 \cdot V_{DD}$ | | $0.3 \cdot V_{DD}$ | * | | * | * | | * | V V |
| | | See Table III | | | | * | | | * | | |
| DIGITAL OUTPUT V_{OH} V_{OL} | $I_{OH} = -0.8mA$ $I_{OL} = 1.6mA$ | 3.6 | | 0.4 | * | | * | * | | * | V V |
| POWER SUPPLY V_{DD} V_{CC} V_{SS} I_{DD} I_{CC} I_{SS} Power | Bipolar Operation Unipolar Operation Unloaded Unloaded No Load, Ext. Reference No Load, Int. Reference | +4.75 +11.4 -15.75 -15.75 | +5.0 | +5.25 +15.75 -11.4 -4.75 | * | * | * | * | * | * | V V V V μA mA mA mW mW |
| TEMPERATURE RANGE Specified Performance | | -40 | | +85 | * | | * | * | | * | $^{\circ}C$ |

* Specifications same as DAC7742Y.

NOTES: (1) With minimum V_{CC}/V_{SS} requirements, internal reference enabled. (2) Please refer to the "Theory of Operation" section for more information with respect to output voltage configurations. (3) See Figure 7 for gain and offset adjustment connection diagrams when using the internal reference. (4) The minimum value for REF_{IN} must be equal to the greater of $V_{SS} + 14V$ and $+4.75V$, where $+4.75V$ is the minimum voltage allowed. (5) Reference low-pass filter values: $100k\Omega$, $1.0\mu F$ (See Figure 10).

PIN CONFIGURATION

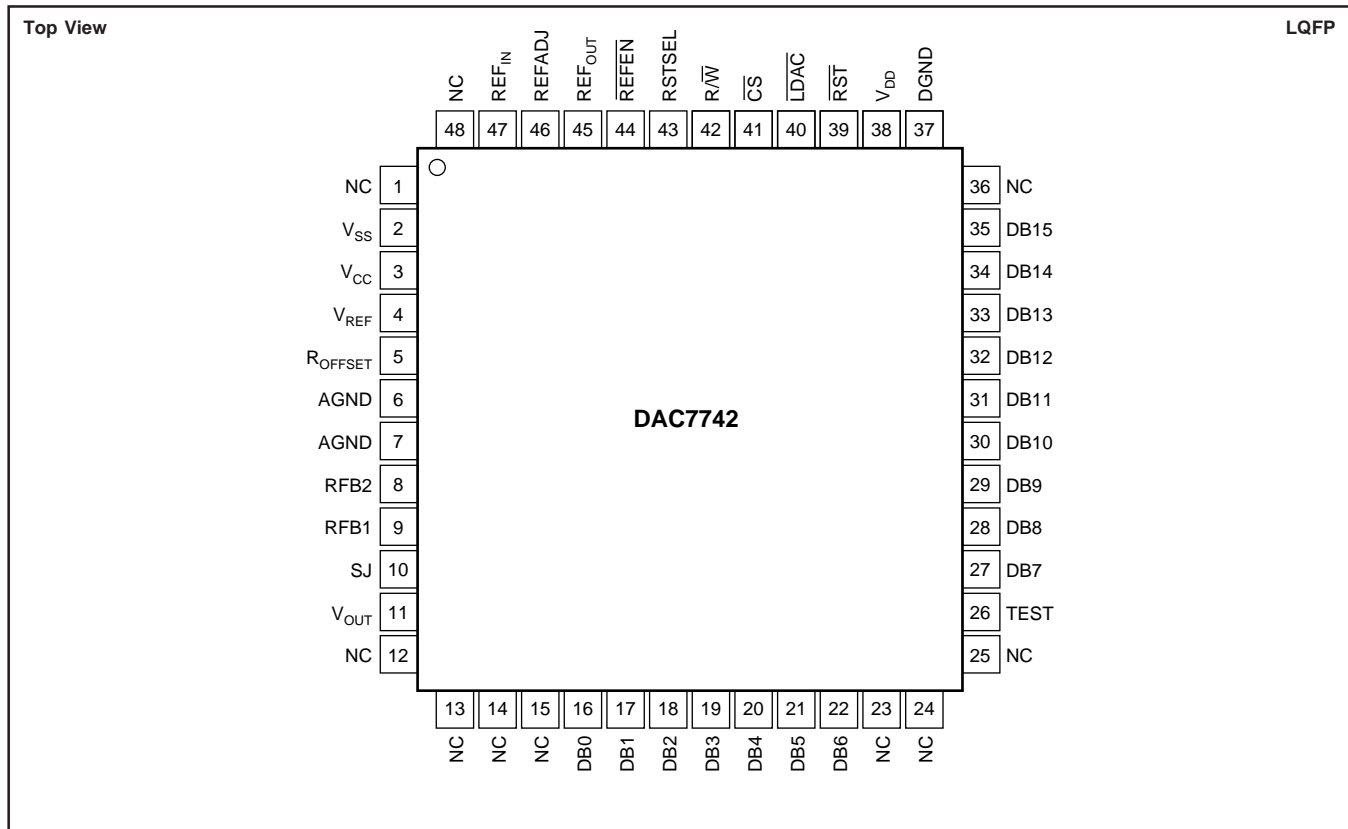


PIN DESCRIPTIONS


| PIN | NAME | DESCRIPTION | PIN | NAME | DESCRIPTION |
|-----|---------------------|---|-----|--------------------|--|
| 1 | NC | No Connection | 28 | DB8 | Data Bit 8 |
| 2 | V _{SS} | Negative Analog Power Supply | 29 | DB9 | Data Bit 9 |
| 3 | V _{CC} | Positive Analog Power Supply | 30 | DB10 | Data Bit 10 |
| 4 | V _{REF} | Buffered Output from REF _{IN} ; can be used to drive external devices. Internally, this pin directly drives the DAC's circuitry. | 31 | DB11 | Data Bit 11 |
| 5 | R _{OFFSET} | Offsetting Resistor | 32 | DB12 | Data Bit 12 |
| 6 | AGND | Analog Ground (Must be tied to analog ground.) | 33 | DB13 | Data Bit 13 |
| 7 | AGND | Analog Ground (Must be tied to analog ground.) | 34 | DB14 | Data Bit 14 |
| 8 | RFB2 | Feedback Resistor 2, used to configure DAC output range. | 35 | DB15 | Data Bit 15 (MSB) |
| 9 | RFB1 | Feedback Resistor 1, used to configure DAC output range. | 36 | NC | No Connection |
| 10 | SJ | Summing Junction of the Output Amplifier | 37 | DGND | Digital Ground |
| 11 | V _{OUT} | DAC Voltage Output | 38 | V _{DD} | Digital Power Supply |
| 12 | NC | No Connection | 39 | R _{ST} | V _{OUT} reset; active LOW, depending on the state of RSTSEL, the DAC register is either reset to mid-scale or min-scale. |
| 13 | NC | No Connection | 40 | LDAC | DAC register load control, active LOW. Data is loaded from the input register to the DAC register. |
| 14 | NC | No Connection | 41 | CS | Chip Select, Active LOW |
| 15 | NC | No Connection | 42 | R/W | Enabled by CS, controls data read (HIGH) and write (LOW) from or to the input register. |
| 16 | DB0 | Data Bit 0 (LSB) | 43 | RSTSEL | Reset Select; determines the action of RST. If HIGH, RST will reset the DAC register to mid-scale. If LOW, RST will reset the DAC register to min-scale. |
| 17 | DB1 | Data Bit 1 | 44 | REFEN | Enables internal +10V reference (REF _{OUT}), active LOW. |
| 18 | DB2 | Data Bit 2 | 45 | REF _{OUT} | Internal Reference Output |
| 19 | DB3 | Data Bit 3 | 46 | REFADJ | Internal Reference Trim. (Acts as a gain adjustment input when the internal reference is used.) |
| 20 | DB4 | Data Bit 4 | 47 | REF _{IN} | Reference Input |
| 21 | DB5 | Data Bit 5 | 48 | NC | No Connection |
| 22 | DB6 | Data Bit 6 | | | |
| 23 | NC | No Connection | | | |
| 24 | NC | No Connection | | | |
| 25 | NC | No Connection | | | |
| 26 | TEST | Reserved, Connect to DGND | | | |
| 27 | DB7 | Data Bit 7 | | | |

TIMING DIAGRAMS


DATA WRITE CYCLE

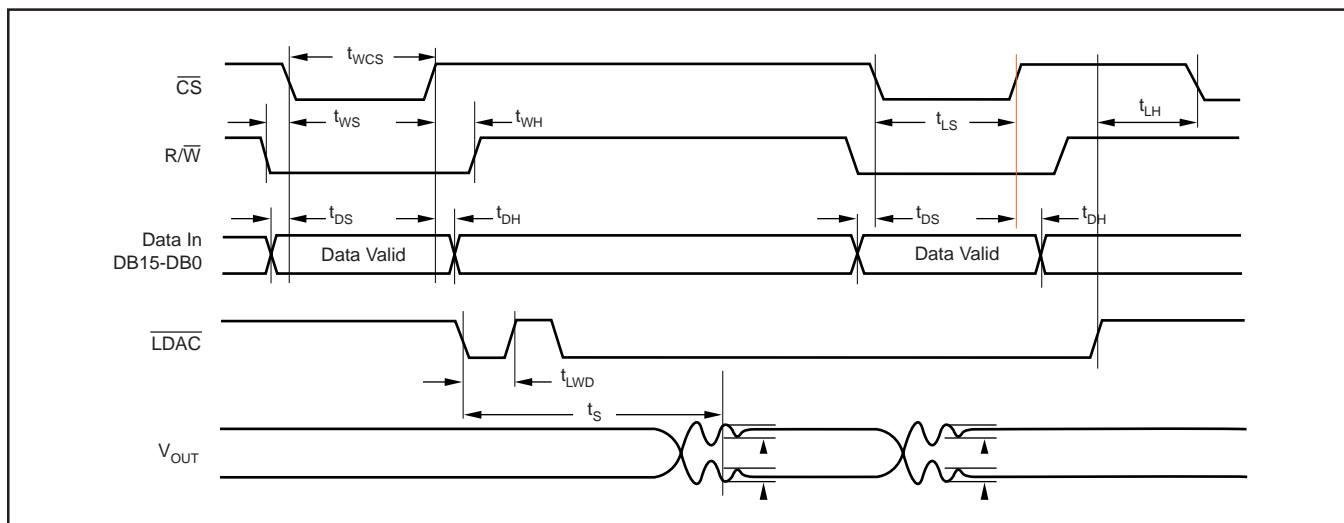

READ CYCLE

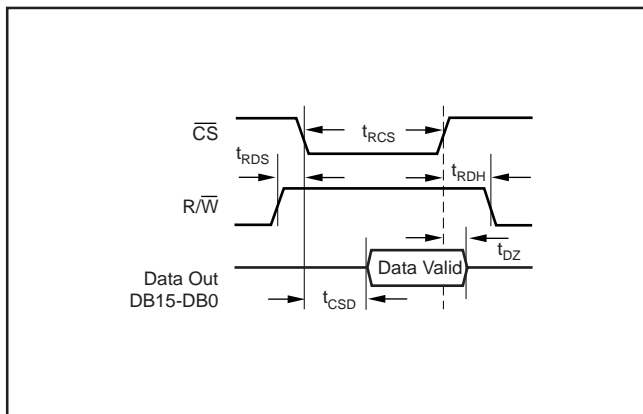

RESET TIMING






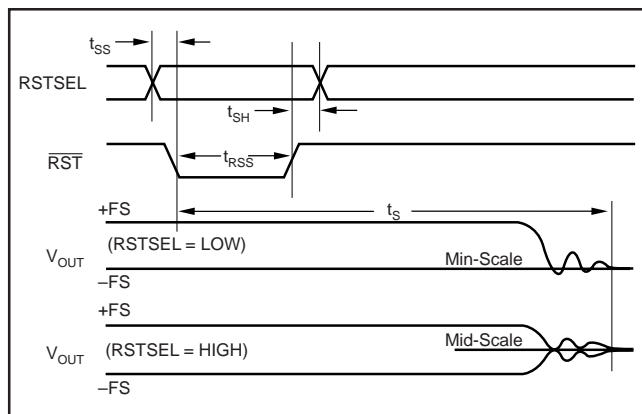


TIMING CHARACTERISTICS

| PARAMETER | DESCRIPTION | DAC7742Y | | | UNITS |
|---------------|---|----------|-----|-----|---------|
| | | MIN | TYP | MAX | |
| READ | | | | | |
| t_{RCS} | \overline{CS} LOW for Read | 90 | | | ns |
| t_{RDS} | R/\overline{W} HIGH to \overline{CS} LOW | 10 | | | ns |
| t_{RDH} | R/\overline{W} HIGH After \overline{CS} HIGH | 10 | | | ns |
| t_{DZ} | \overline{CS} HIGH to Data Bus High Impedance | 10 | | 70 | ns |
| t_{CSD} | \overline{CS} LOW to Data Bus Valid | | 70 | 100 | ns |
| WRITE | | | | | |
| t_{WS} | R/\overline{W} LOW to \overline{CS} LOW | 10 | | | ns |
| t_{WH} | R/\overline{W} LOW After \overline{CS} HIGH | 10 | | | ns |
| t_{WCS} | \overline{CS} LOW for Write | 25 | | | ns |
| t_{LWD} | LDAC LOW for Write | 20 | | | ns |
| t_{LS} | \overline{CS} LOW to \overline{LDAC} HIGH for Direct Update | 30 | | | ns |
| t_{LH} | \overline{CS} LOW After \overline{LDAC} HIGH | 0 | | | ns |
| t_{DS} | Data Valid to \overline{CS} LOW | 0 | | | ns |
| t_{DH} | Data Valid After \overline{CS} HIGH | 20 | | | ns |
| RESET | | | | | |
| t_{RSS} | \overline{RST} LOW | 30 | | | ns |
| t_{SS} | RSTSEL Valid Before \overline{RST} LOW | 0 | | | ns |
| t_{SH} | RSTSEL Valid After \overline{RST} HIGH | 10 | | | ns |
| ANALOG | | | | | |
| t_s | Voltage Output Settling Time | | | 5 | μ s |







TYPICAL CHARACTERISTICS

$T_A = +25^\circ\text{C}$ (unless otherwise noted).

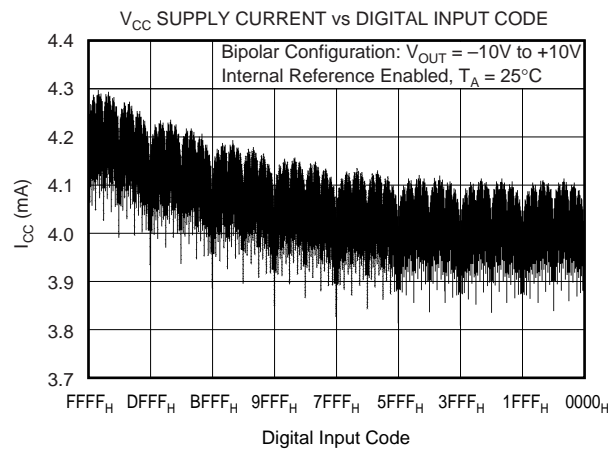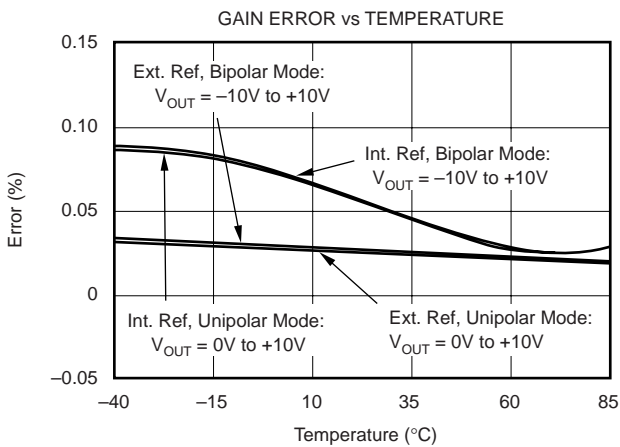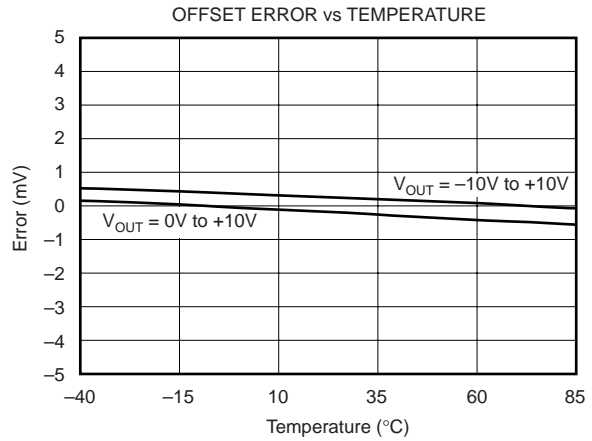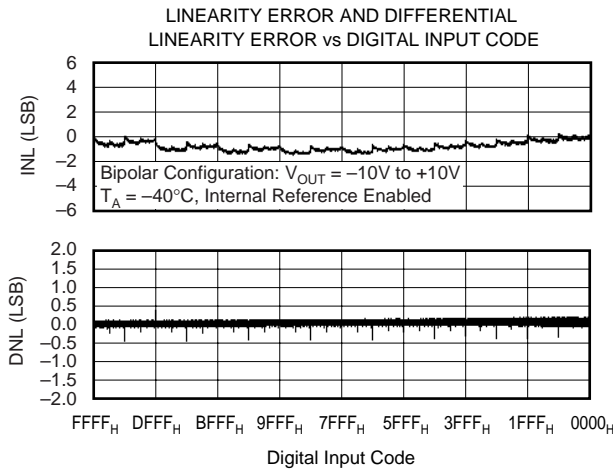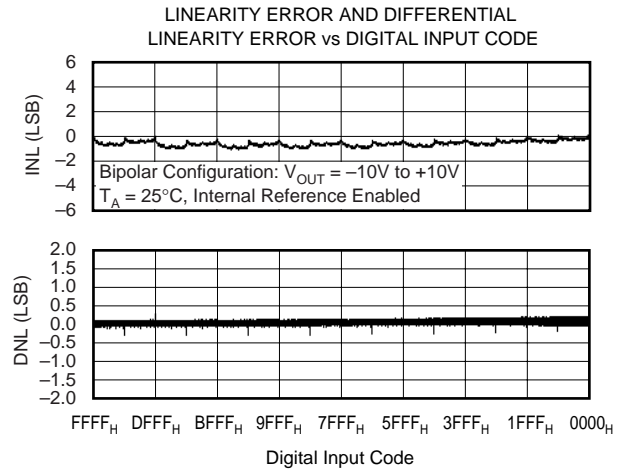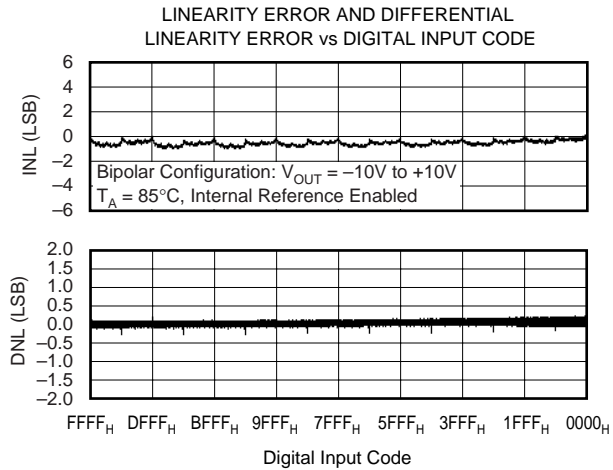







TYPICAL CHARACTERISTICS (Cont.)

$T_A = +25^\circ\text{C}$ (unless otherwise noted).

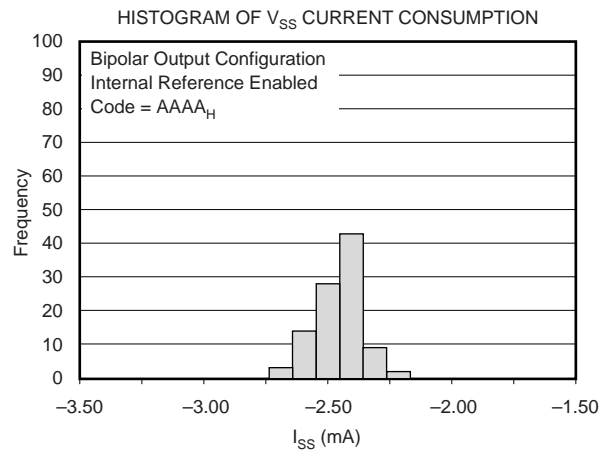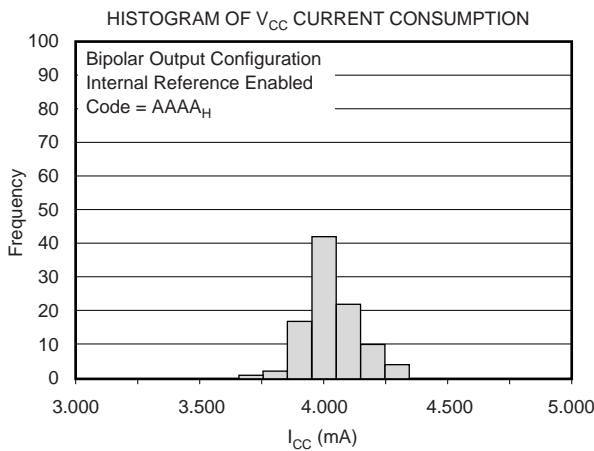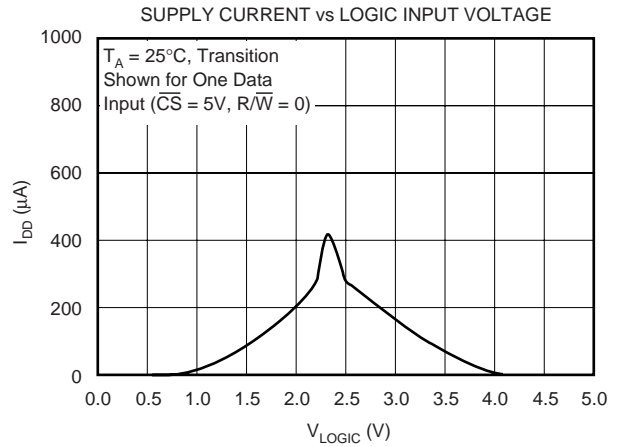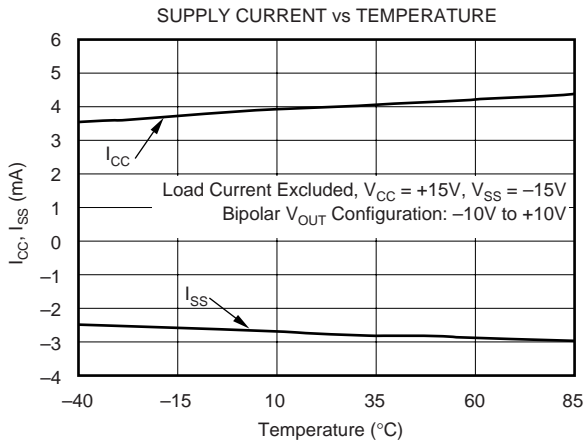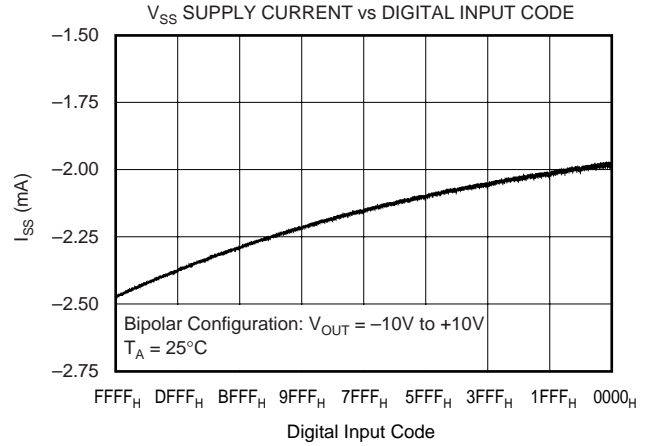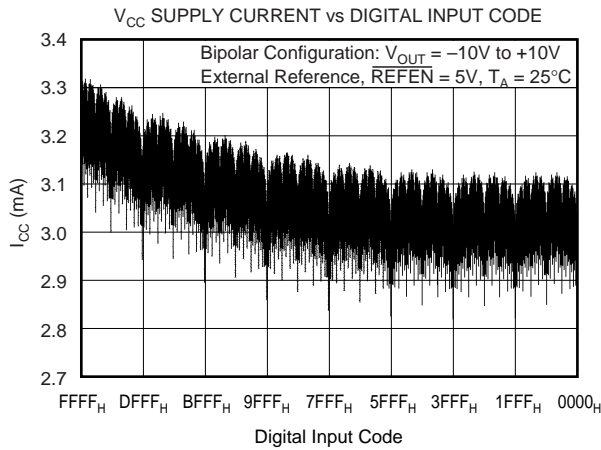







TYPICAL CHARACTERISTICS (Cont.)

$T_A = +25^\circ\text{C}$ (unless otherwise noted).

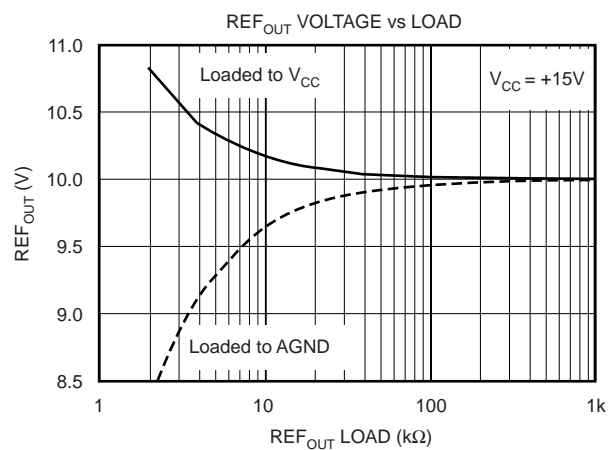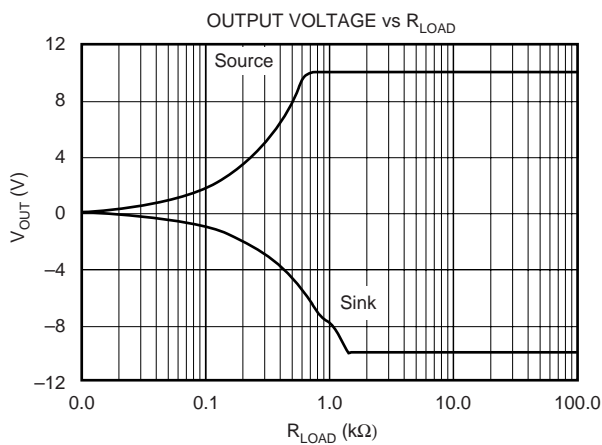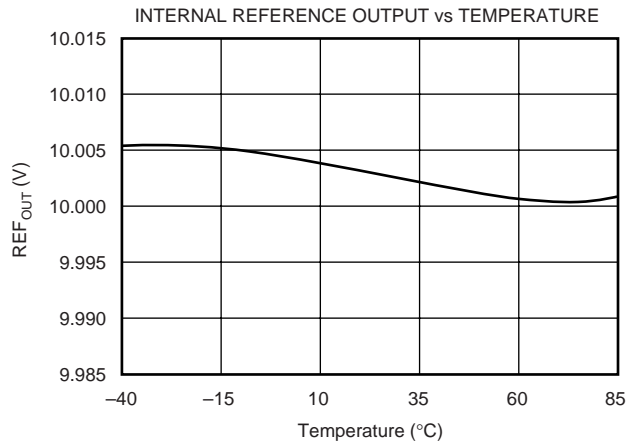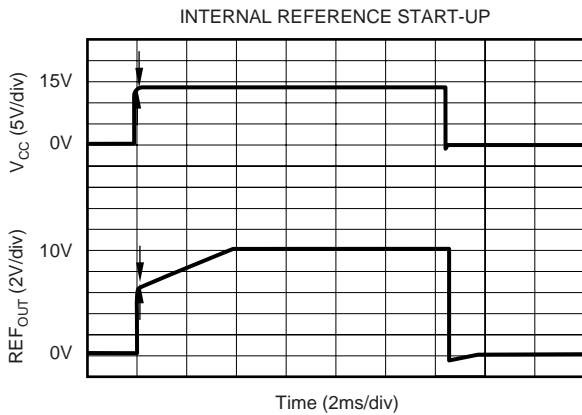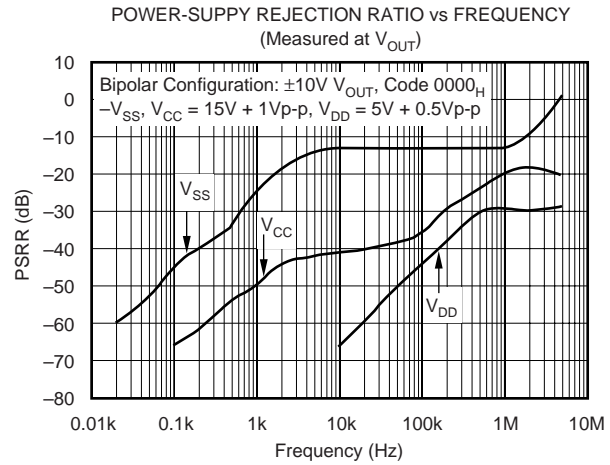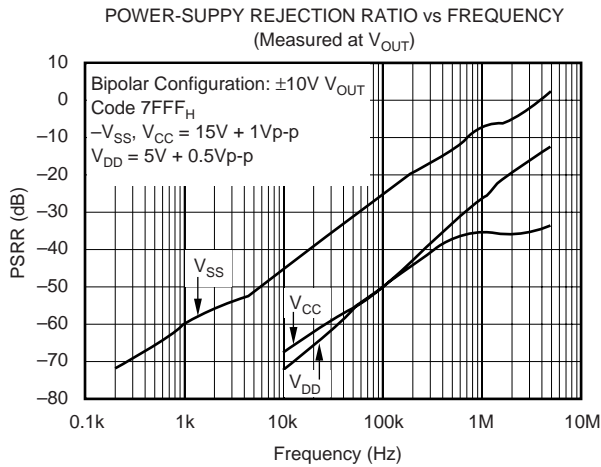

TYPICAL CHARACTERISTICS (Cont.)


$T_A = +25^\circ\text{C}$ (unless otherwise noted).

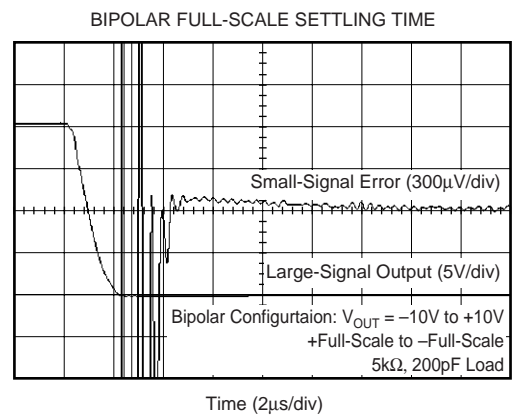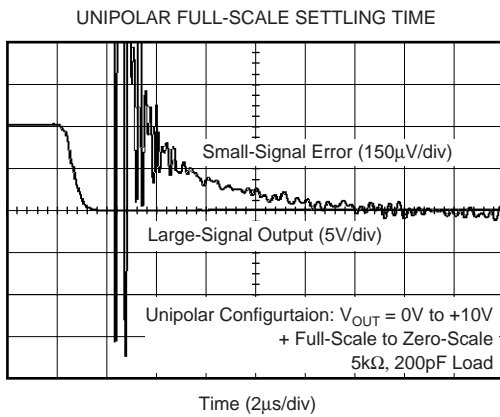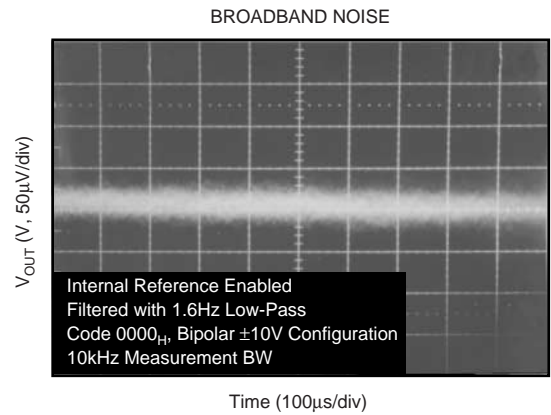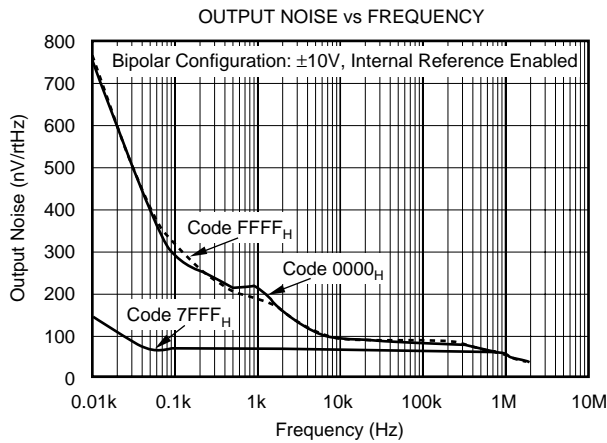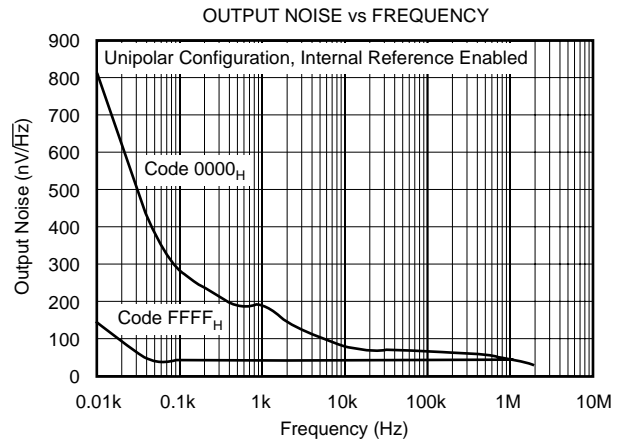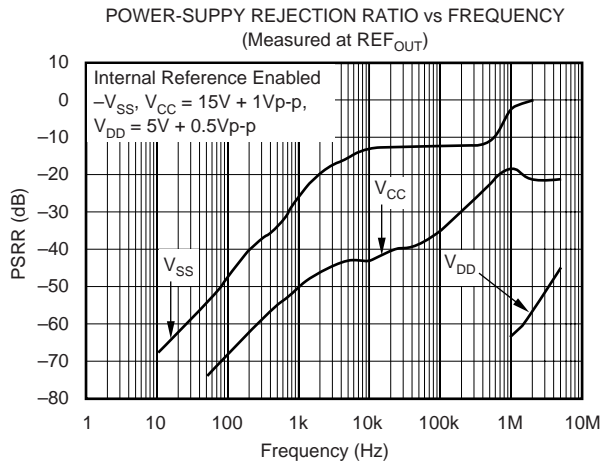

TYPICAL CHARACTERISTICS (Cont.)


$T_A = +25^\circ\text{C}$ (unless otherwise noted).

UNIPOLAR FULL-SCALE SETTLING TIME

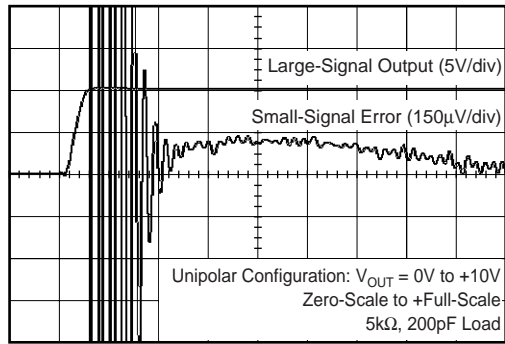


Time (2µs/div)

BIPOLAR FULL-SCALE SETTLING TIME

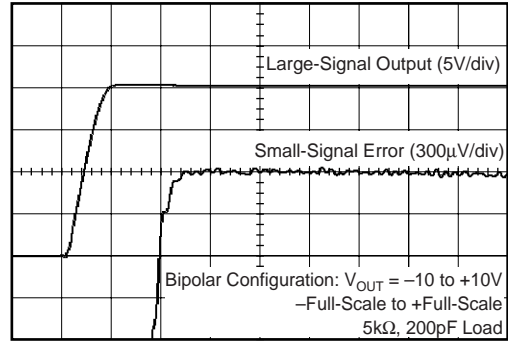


Time (2µs/div)

MID-SCALE GLITCH

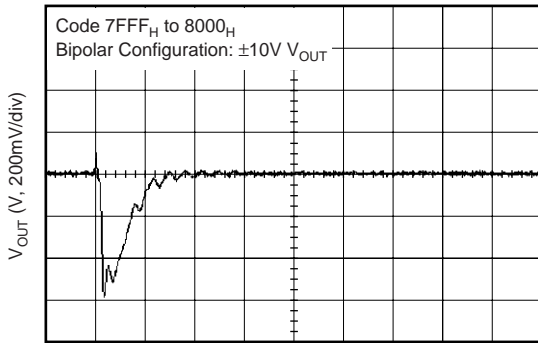


Time (1µs/div)

MID-SCALE GLITCH

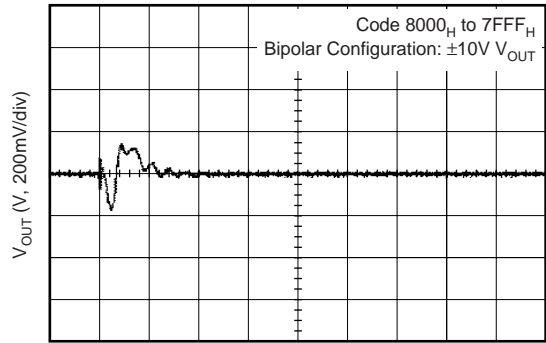

Time (1µs/div)

DIGITAL FEEDTHROUGH

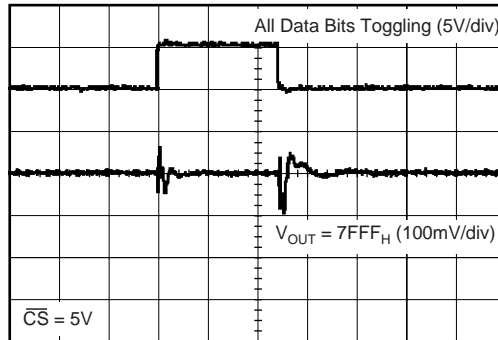

Time (200ns/div)

THEORY OF OPERATION

The DAC7742 is a voltage output, 16-bit DAC with a +10V built-in internal reference. The architecture is an R-2R ladder configuration with the three MSBs segmented, followed by an operational amplifier that serves as a buffer, as shown in Figure 1. The output buffer is designed to allow user-configurable output adjustments giving the DAC7742 output voltage ranges of 0V to +10V, -5V to +5V, or -10V to +10V. Please refer to Figures 2, 3, and 4 for pin configuration information.

The digital input is a parallel word made up of the 16-bit DAC code and is loaded into the DAC register using the $\overline{\text{LDAC}}$ input pin. The converter can be powered from $\pm 12\text{V}$ to $\pm 15\text{V}$ dual analog supplies and a +5V logic supply. The device offers a reset function, which immediately sets the DAC output voltage and DAC register to min-scale (code FFFF_H) or mid-scale (code 7FFF_H). The data I/O and reset functions are discussed in more detail in the following sections.

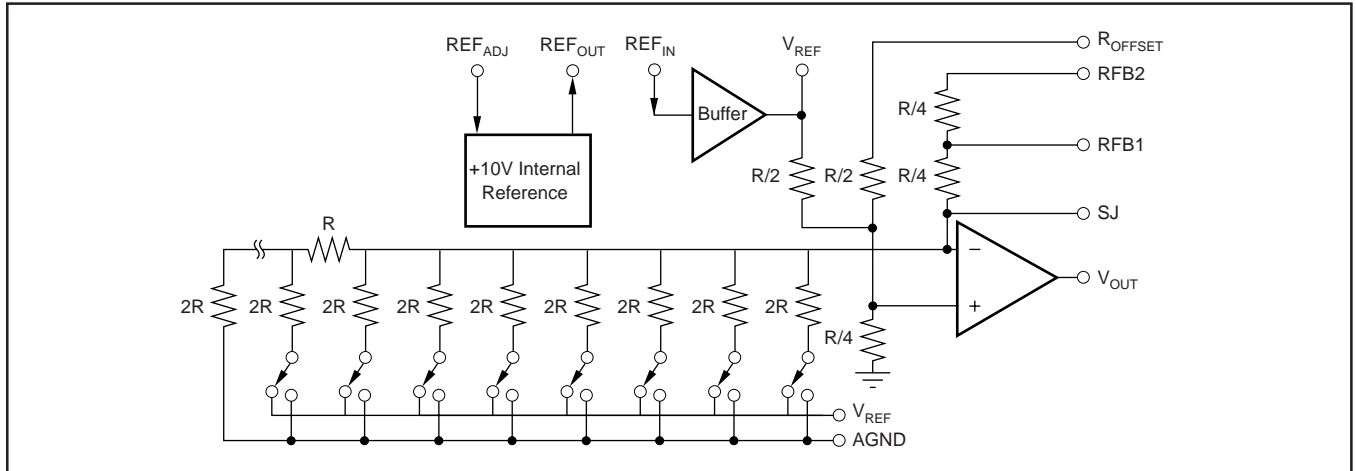


FIGURE 1. DAC7742 Architecture.

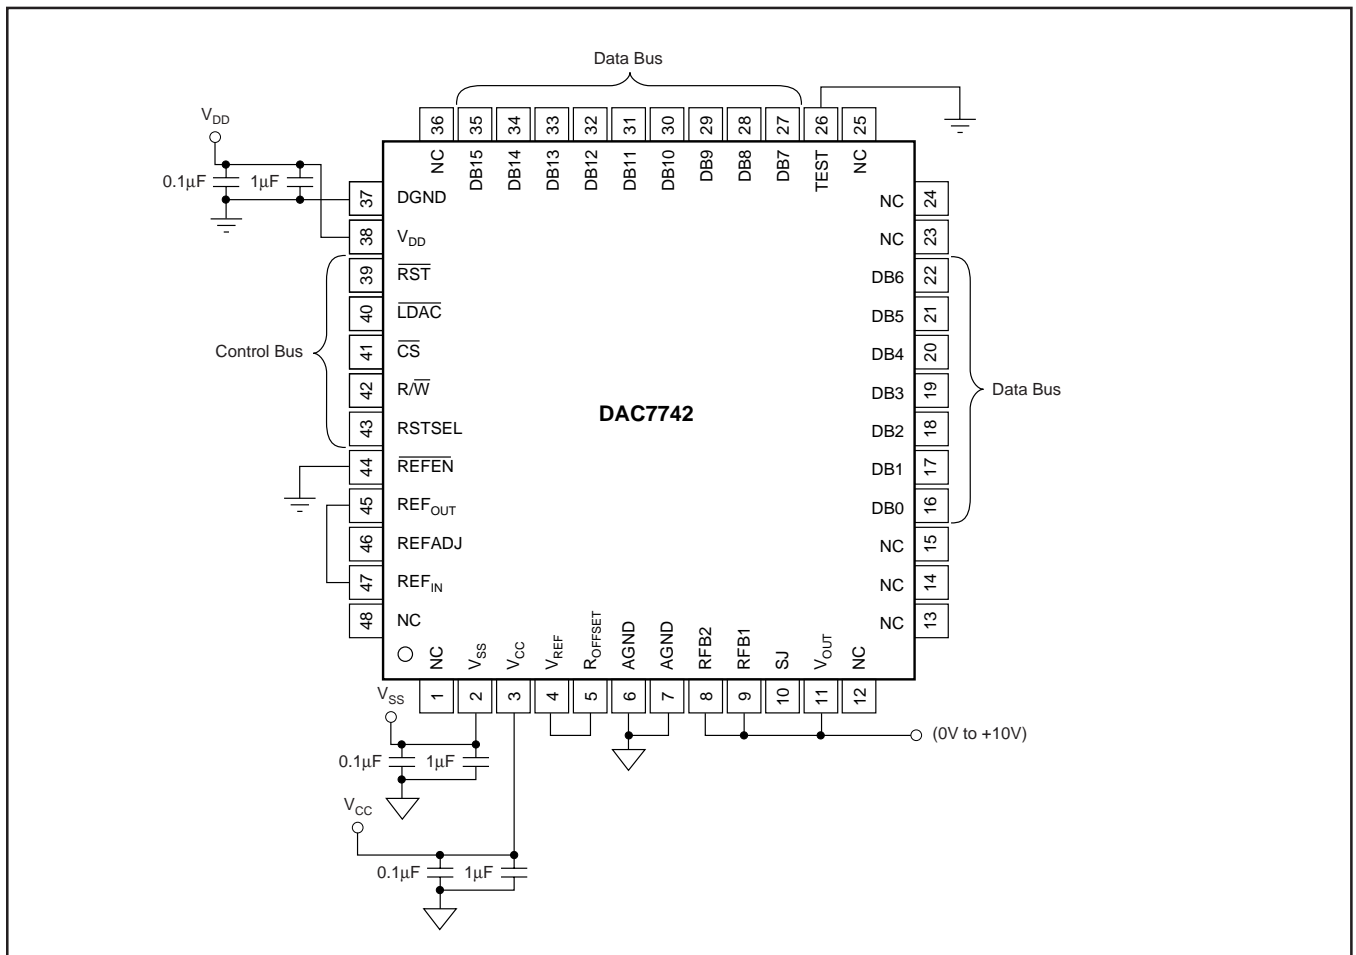


FIGURE 2. Basic Operation: $V_{\text{OUT}} = 0\text{V}$ to +10V.

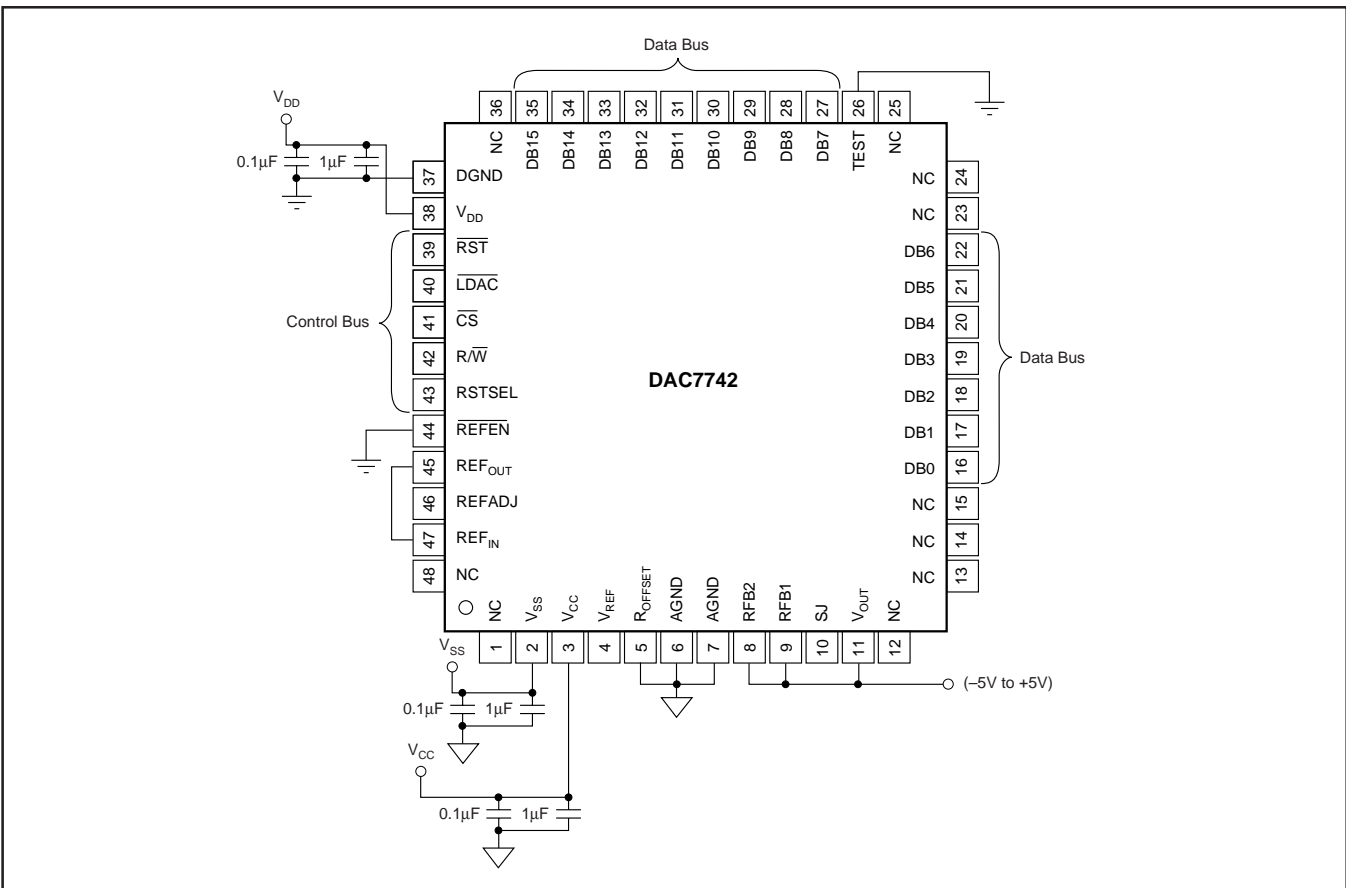


FIGURE 3. Basic Operation: $V_{OUT} = -5V \text{ to } +5V$.

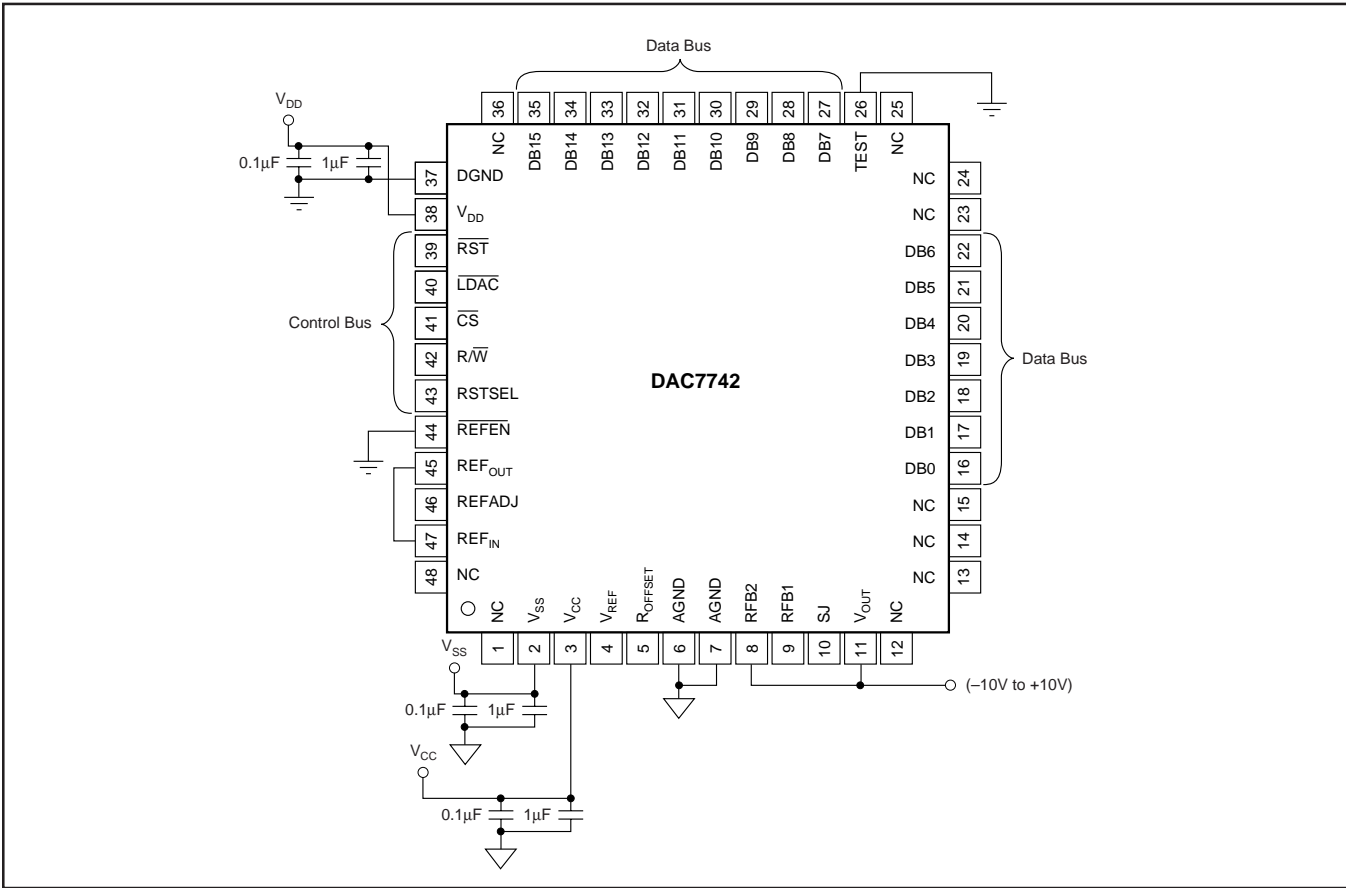


FIGURE 4. Basic Operation: $V_{OUT} = -10V \text{ to } +10V$.

ANALOG OUTPUTS

The output amplifier can swing to within 1.4V of the supply rails, specified over the -40°C to $+85^{\circ}\text{C}$ temperature range. This allows for a $\pm 10\text{V}$ DAC voltage output operation from $\pm 12\text{V}$ supplies with a typical 5% tolerance.

When the DAC7742 is configured for a unipolar, 0V to 10V output, a negative voltage supply is required. This is due to internal biasing of the output stage. Please refer to the “Electrical Characteristics” table for more information.

The minimum and maximum voltage output values are dependent upon the output configuration implemented and reference voltage applied to the DAC7742. Please note that V_{SS} (the negative power supply) must be in the range of -4.75V to -15.75V for unipolar operation. The voltage on V_{SS} sets several bias points within the converter and is required in all modes of operation. If V_{SS} is not in one of these two configurations, the bias values may be in error and proper operation of the device is not ensured.

Supply sequence is important in establishing correct startup of the DAC.

The digital supply (V_{DD}) needs to establish correct bias conditions before the analog supplies (V_{CC} , V_{SS}) are brought up. If the digital supply cannot be brought up first, it must come up before either analog supply (V_{CC} or V_{SS}), with the preferred sequence of: V_{SS} (device substrate), V_{DD} , and then V_{CC} .

REFERENCE INPUTS

The DAC7742 provides a built-in +10V voltage reference and on-chip buffer to allow external component reference drive. To use the internal reference, $\overline{\text{REFEN}}$ must be LOW, enabling the reference circuitry of the DAC7742 (as shown in Table I) and the REF_{OUT} pin must be connected to REF_{IN} . This is the input to the on-chip reference buffer. The buffer’s output is provided

| REFEN | ACTION |
|-------|---|
| 1 | Internal Reference disabled; $\text{REF}_{\text{OUT}} = \text{High Impedance}$ |
| 0 | Internal Reference enabled; $\text{REF}_{\text{OUT}} = +10\text{V}$ |

TABLE I. $\overline{\text{REFEN}}$ Action.

at the V_{REF} pin. In this configuration, V_{REF} is used to setup the DAC7742 output amplifier into one of three voltage output modes as discussed earlier. V_{REF} can also be used to drive other system components requiring an external reference.

The internal reference of the DAC7742 can be disabled when use of an external reference is desired. When using an external reference, the reference input, REF_{IN} , can be any voltage between 4.75V (or $V_{SS} + 14\text{V}$, whichever is greater) and $V_{CC} - 1.4\text{V}$.

DIGITAL INTERFACE

Table III shows the data format for the DAC7742 and Table II illustrates the basic control logic of the device. The interface consists of a chip select input ($\overline{\text{CS}}$), read/write control input ($\overline{\text{R}/\overline{\text{W}}}$), data inputs (DB0-DB15), and a load DAC input ($\overline{\text{LDAC}}$). An asynchronous reset input ($\overline{\text{RST}}$) which is active LOW, is provided to simplify start-up conditions, periodic resets, or emergency resets to a known state, depending on the status of the reset select (RSTSEL) signal. The DAC code is provided via a 16-bit parallel interface, as shown in Table II. The input word makes up the DAC code to be loaded into the data input register of the device. The data is latched into the input register on rising $\overline{\text{CS}}$ and is loaded into the DAC register upon reception of a LOW level on the $\overline{\text{LDAC}}$ input. This action updates the analog output, V_{OUT} , to the desired value. $\overline{\text{LDAC}}$ inputs of multiple DAC7742s can be connected when a synchronized update of numerous DAC outputs is desired. Please refer to the timing section for more detailed data I/O information.

| DIGITAL INPUT | ANALOG OUTPUT | |
|---------------|---|---|
| | Unipolar Configuration | Bipolar Configuration |
| | Complementary Straight Binary | Complementary Offset Binary |
| 0xFFFF | Zero (0V) | -Full-Scale ($-V_{\text{REF}}$ or $-V_{\text{REF}}/2$) |
| 0xFFFE | Zero + 1LSB | -Full-Scale + 1LSB |
| : | : | : |
| 0x7FFF | 1/2 Full-Scale | Bipolar Zero |
| 0x7FFE | 1/2 Full-Scale + 1LSB | Bipolar Zero + 1LSB |
| : | : | : |
| 0x0000 | Full-Scale ($V_{\text{REF}} - 1\text{LSB}$) | +Full-Scale ($+V_{\text{REF}} - 1\text{LSB}$ or $+V_{\text{REF}}/2 - 1\text{LSB}$) |

TABLE III. DAC7742 Data Format.

| CONTROL STATUS | | | | | COMMAND | | |
|---|------------------------|-------------------------|-----------------|--------------------------|--------------------|--------------------|--|
| $\overline{\text{R}/\overline{\text{W}}}$ | $\overline{\text{CS}}$ | $\overline{\text{RST}}$ | RSTSEL | $\overline{\text{LDAC}}$ | Input Register | DAC Register | Mode |
| L | L | H | X | H | Write | Hold | Write Data to Input Register |
| X | H | H | X | L | Hold | Write | Update DAC Register with Data from Input Register |
| L | L | H | X | L | Transparent | Write | Write DAC Register Directly from Data Bus |
| H | L | H | X | H, L | Read | Hold | Read Data in Input Register |
| X | H | H | X | H | Hold | Hold | No Change |
| X | X | L | L | X | Reset to Min-Scale | Reset to Min-Scale | Reset to Input and DAC Register (FFFF _H) Min-Scale |
| X | X | L | H | X | Reset to Mid-Scale | Reset to Mid-Scale | Reset to Input and DAC Register (7FFF _H) Mid-Scale |

TABLE II. DAC7742 Logic Truth Table.

DAC RESET

The $\overline{\text{RST}}$ and RSTSEL inputs control the reset of the analog output. The reset command is level triggered by a LOW signal on $\overline{\text{RST}}$. Once $\overline{\text{RST}}$ is LOW, the DAC output will begin settling to the mid-scale or min-scale code depending on the state of the RSTSEL input. A HIGH value on RSTSEL will cause V_{OUT} to reset to the mid-scale code (7FFF_H) and a LOW value will reset V_{OUT} to min-scale (FFFF_H). A change in the state of the RSTSEL input while $\overline{\text{RST}}$ is LOW will cause a corresponding change in the reset command selected internally and consequently change the output value of V_{OUT} of the DAC. Note that a valid reset signal also resets the input register of the DAC to the value specified by the state of RSTSEL.

GAIN AND OFFSET CALIBRATION

The architecture of the DAC7742 is designed in such a way as to allow for easily configurable offset and gain calibration using a minimum of external components. The DAC7742 has built-in feedback resistors and output amplifier summing points brought out of the package in order to make the absolute calibration possible. Figures 5 and 6 illustrate the relationship of offset and gain adjustments for the DAC7742 in a unipolar configuration and in a bipolar configuration, respectively.

When calibrating the DAC's output, offset should be adjusted first to avoid 1st-order interaction of adjustments. In unipolar mode, the DAC7742's offset is adjusted from code FFFF_H and for either bipolar mode, offset adjustments are made at code 7FFF_H. Gain adjustment can then be made at code 0000_H for each configuration, where the output of the DAC should be at +10V for the 0V to +10V – 1LSB or ±10V output range and +5V – 1LSB for the ±5V output range. Figure 7 shows the generalized external offset and gain adjustment circuitry using potentiometers.

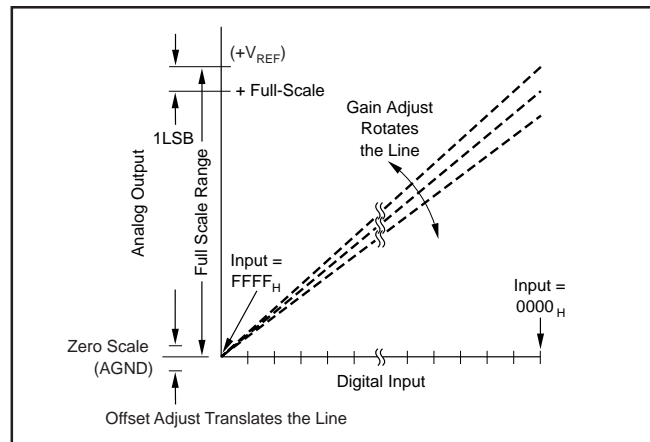


FIGURE 5. Relationship of Offset and Gain Adjustments for $V_{\text{OUT}} = 0\text{V}$ to +10V Output Configuration.

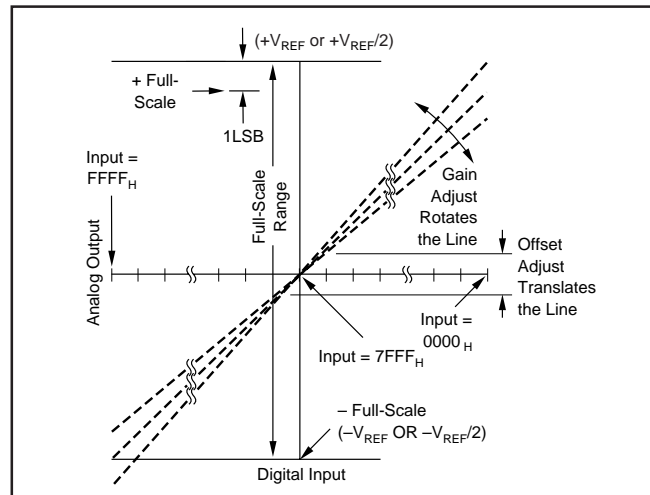


FIGURE 6. Relationship of Offset and Gain Adjustments for $V_{\text{OUT}} = -10\text{V}$ to +10V Output Configuration. (Same Theory Applies for $V_{\text{OUT}} = -5\text{V}$ to +5V.)

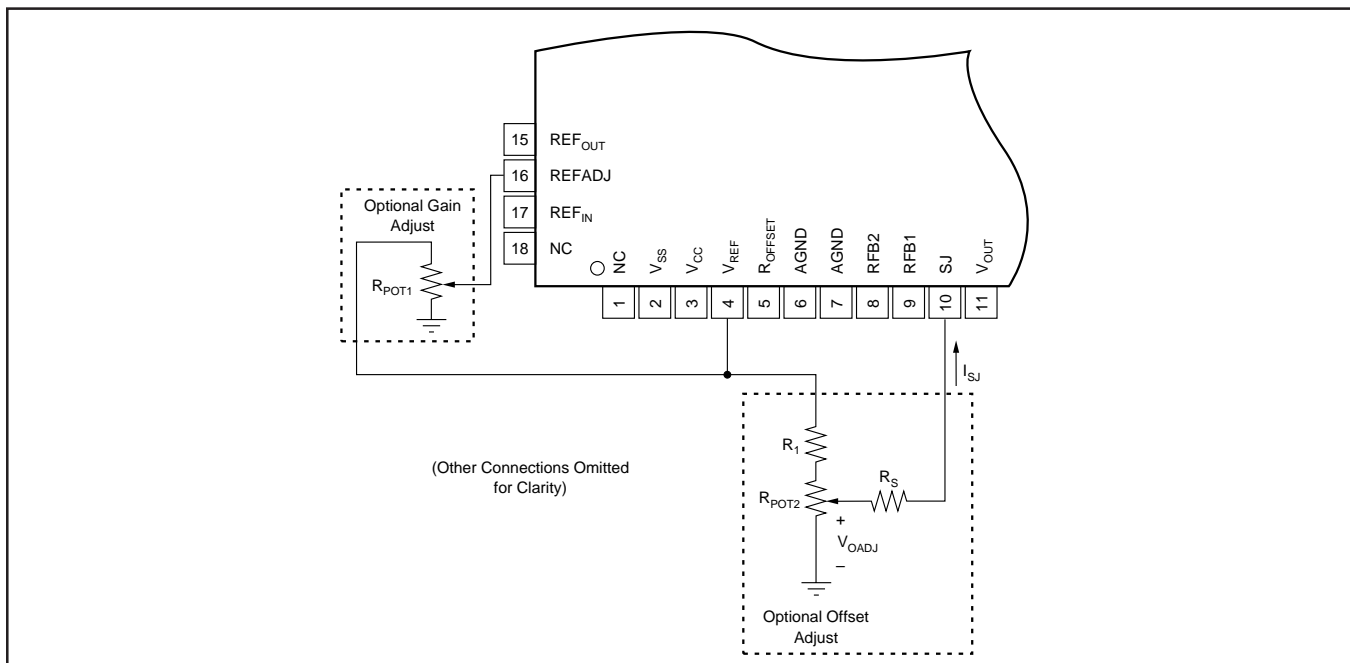


FIGURE 7. Generalized External Calibration Circuitry for Gain and Symmetrical Offset Adjustment.

OFFSET ADJUSTMENT

Offset adjustment is accomplished by introducing a small current into the summing junction (SJ) of the DAC7742. The voltage at SJ, or V_{SJ} , is dependent on the output configuration of the DAC7742. Table IV shows the required pin strapping for a given configuration and the nominal values of V_{SJ} for each output range.

| REFERENCE CONFIGURATION | OUTPUT CONFIGURATION | PIN STRAPPING | | | $V_{SJ}^{(1)}$ |
|-------------------------|---|---------------------|---------------------|---------------------|---------------------|
| | | R _{OFFSET} | RFB1 | RFB2 | |
| Internal Reference | 0V to +10V | to V _{REF} | to V _{OUT} | to V _{OUT} | +5V |
| | -10V to +10V | NC | NC | to V _{OUT} | +3.333V |
| | -5V to +5V | to AGND | to V _{OUT} | to V _{OUT} | +2.5V |
| External Reference | 0V to V _{REF} | to V _{REF} | to V _{OUT} | to V _{OUT} | V _{REF} /2 |
| | -V _{REF} to V _{REF} | NC | NC | to V _{OUT} | V _{REF} /3 |
| | -V _{REF} /2 to V _{REF} /2 | to AGND | to V _{OUT} | to V _{OUT} | V _{REF} /4 |

NOTE: (1) Voltage measured at V_{SJ} for a given configuration.

TABLE IV. Nominal V_{SJ} vs V_{OUT} and Reference Configuration.

The current level required to adjust the DAC7742's offset can be created by using a potentiometer divider, see Figure 7. Another alternative is to use a unipolar DAC in order to apply a voltage, V_{OAJ} , to the resistor R_S . A $\pm 1.2\mu\text{A}$ current range applied to SJ will ensure offset adjustment coverage of the $\pm 0.1\%$ maximum offset specification of the DAC7742.

When in a unipolar configuration ($V_{SJ} = 5\text{V}$), only a single resistor, R_S , is needed for symmetrical offset adjustment with a 0V to 10V V_{OAJ} range. When in one of the two bipolar configurations, V_{SJ} is either +3.333v ($\pm 10\text{V}$ range) or +2.5V ($\pm 5\text{V}$ range), and circuit values chosen to match those given in Table V will provide symmetrical offset adjust. Please refer to Figure 7 for component configuration.

| OUTPUT CONFIGURATION | R _{POT2} | R ₁ | R _S | I _{SJ} RANGE | NOMINAL OFFSET ADJUSTMENT |
|----------------------|-------------------|----------------|----------------|-----------------------|---------------------------|
| 0V to +10V | 10k | 0 | 2.5M | $\pm 2\mu\text{A}$ | $\pm 25\text{mV}$ |
| -10V to +10V | 10k | 5k | 1.5M | $\pm 2.2\mu\text{A}$ | $\pm 55\text{mV}$ |
| -5V to +5V | 10k | 10k | 1.5M | $\pm 1.7\mu\text{A}$ | $\pm 21\text{mV}$ |

TABLE V. Recommended External Component Values for Symmetrical Offset Adjustment ($V_{REF} = 10\text{V}$).

Figure 8 illustrates the typical and minimum offset adjustment ranges provided by forcing a current at SJ for a given output voltage configuration.

GAIN ADJUSTMENT

When using the internal reference of the DAC7742, gain adjustment is performed by adjusting the device's internal reference voltage via the reference adjust pin, REFADJ. The effect of a reference voltage change on the gain of the DAC output can be seen in the generic equation (for unipolar configuration):

$$V_{OUT} = V_{REFIN} \cdot \left(\frac{(65535 - N)}{65536} \right)$$

Where N is represented in decimal format and ranges from 0 to 65535.

REFADJ can be driven by a low impedance voltage source such as a unipolar, 0V to +10V DAC or a potentiometer (less than 100k Ω), see Figure 7. Since the input impedance of REFADJ is typically 50k Ω , the smaller the resistance of the potentiometer, the more linear the adjustment will be. A 10k Ω potentiometer is suggested if linearity of the reference adjustment is of concern.

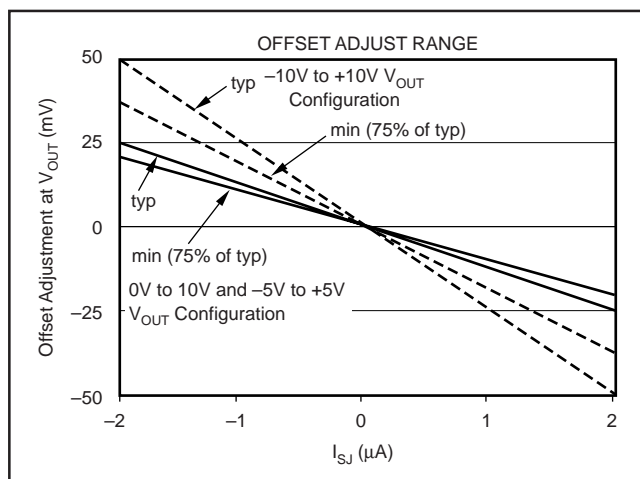


FIGURE 8. Offset Adjustment Transfer Characteristic.

When the DAC7742's internal reference is not used, gain adjustments can be made via trimming the external reference applied to the DAC at REF_{IN}. This can be accomplished through using a potentiometer, unipolar DAC, or other means of precision voltage adjustment to control the voltage presented to the DAC7742 by the external reference. Figure 9 and Table VI summarize the range of adjustment of the internal reference via REFADJ.

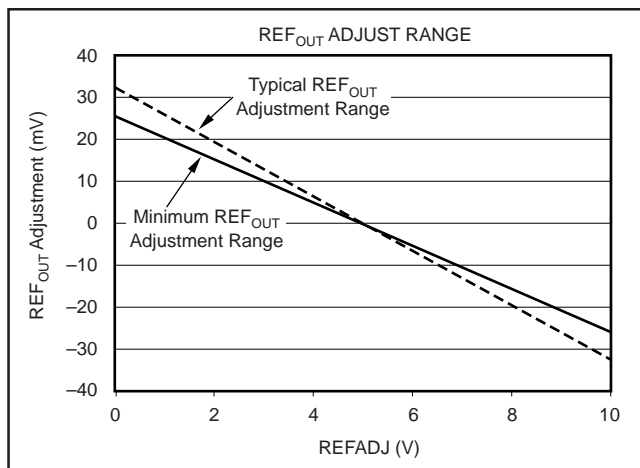


FIGURE 9. Internal Reference Adjustment Transfer Characteristic.

| VOLTAGE AT REFADJ | REF _{OUT} VOLTAGE |
|----------------------------------|----------------------------|
| REFADJ = 0V | 10V + 25mV (min) |
| REFADJ = 5V or NC ⁽¹⁾ | 10V |
| REFADJ = 10V | 10V - 25mV (max) |

NOTE: "NC" is "Not Connected".

TABLE VI. Minimum Internal Reference Adjustment Range.

NOISE PERFORMANCE

Increased noise performance of the DAC output can be achieved by filtering the voltage reference input to the DAC7742. Figure 10 shows a typical internal reference filter schematic. A low-pass filter applied between the REF_{OUT} and REF_{IN} pins can increase noise immunity at the DAC and output amplifier. The REF_{OUT} pin can source a maximum of 50µA so care should be taken in order to avoid overloading the internal reference output.

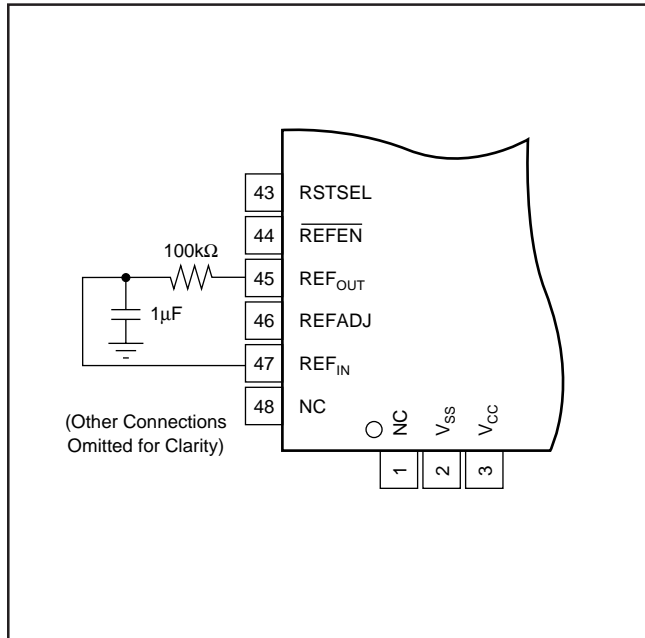


FIGURE 10. Internal Reference Filter.

LAYOUT

A precision analog component requires careful layout, adequate bypassing, and clean, well-regulated power supplies. The DAC7742 offers separate digital and analog supplies, as it will often be used in close proximity with digital logic, microcontrollers, microprocessors, and digital signal processors. The more digital logic present in the design and the higher the switching speed, the more important it will become to separate the analog and digital ground and supply planes at the device.

Since the DAC7742 has both analog and digital ground pins, return currents can be better controlled and have less effect on the DAC output error. Ideally, AGND would be connected directly to an analog ground plane and DGND to the digital ground plane. The analog ground plane would be separate from the ground connection for the digital components until they were connected at the power entry point of the system.

The voltages applied to V_{CC} and V_{SS} should be well regulated and low noise. Switching power supplies and DC/DC converters will often have high-frequency glitches or spikes riding on the output voltage. In addition, digital components can create similar high-frequency spikes as their internal logic switches states. This noise can easily couple into the DAC output voltage through various paths between the power connections and analog output.

In addition, a 1µF to 10µF bypass capacitor in parallel with a 0.1µF bypass capacitor is strongly recommended for each supply input. In some situations, additional bypassing may be required, such as a 100µF electrolytic capacitor or even a "Pi" filter made up of inductors and capacitors—all designed to essentially low-pass filter the analog supplies, removing any high frequency noise components.

PACKAGING INFORMATION

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead/Ball Finish (6) | MSL Peak Temp (3) | Op Temp (°C) | Device Marking (4/5) | Samples |
|------------------|---------------|--------------|-----------------|------|-------------|-------------------------|-------------------------|----------------------|--------------|-------------------------|----------------|
| DAC7742Y/250 | LIFEBUY | LQFP | PT | 48 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU-DCC | Level-3-260C-168 HR | -40 to 85 | DAC7742Y | |
| DAC7742YB/250 | ACTIVE | LQFP | PT | 48 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU-DCC | Level-3-260C-168 HR | -40 to 85 | DAC7742Y B | Samples |
| DAC7742YC/250 | ACTIVE | LQFP | PT | 48 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU-DCC | Level-3-260C-168 HR | -40 to 85 | DAC7742Y C | Samples |

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBsolete: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|--------------|-----------------|------|-----|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| DAC7742Y/250 | LQFP | PT | 48 | 250 | 180.0 | 16.4 | 9.6 | 9.6 | 1.9 | 12.0 | 16.0 | Q2 |
| DAC7742YB/250 | LQFP | PT | 48 | 250 | 180.0 | 16.4 | 9.6 | 9.6 | 1.9 | 12.0 | 16.0 | Q2 |
| DAC7742YC/250 | LQFP | PT | 48 | 250 | 180.0 | 16.4 | 9.6 | 9.6 | 1.9 | 12.0 | 16.0 | Q2 |


TAPE AND REEL BOX DIMENSIONS


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|---------------|--------------|-----------------|------|-----|-------------|------------|-------------|
| DAC7742Y/250 | LQFP | PT | 48 | 250 | 213.0 | 191.0 | 55.0 |
| DAC7742YB/250 | LQFP | PT | 48 | 250 | 213.0 | 191.0 | 55.0 |
| DAC7742YC/250 | LQFP | PT | 48 | 250 | 213.0 | 191.0 | 55.0 |

PT (S-PQFP-G48)

PLASTIC QUAD FLATPACK

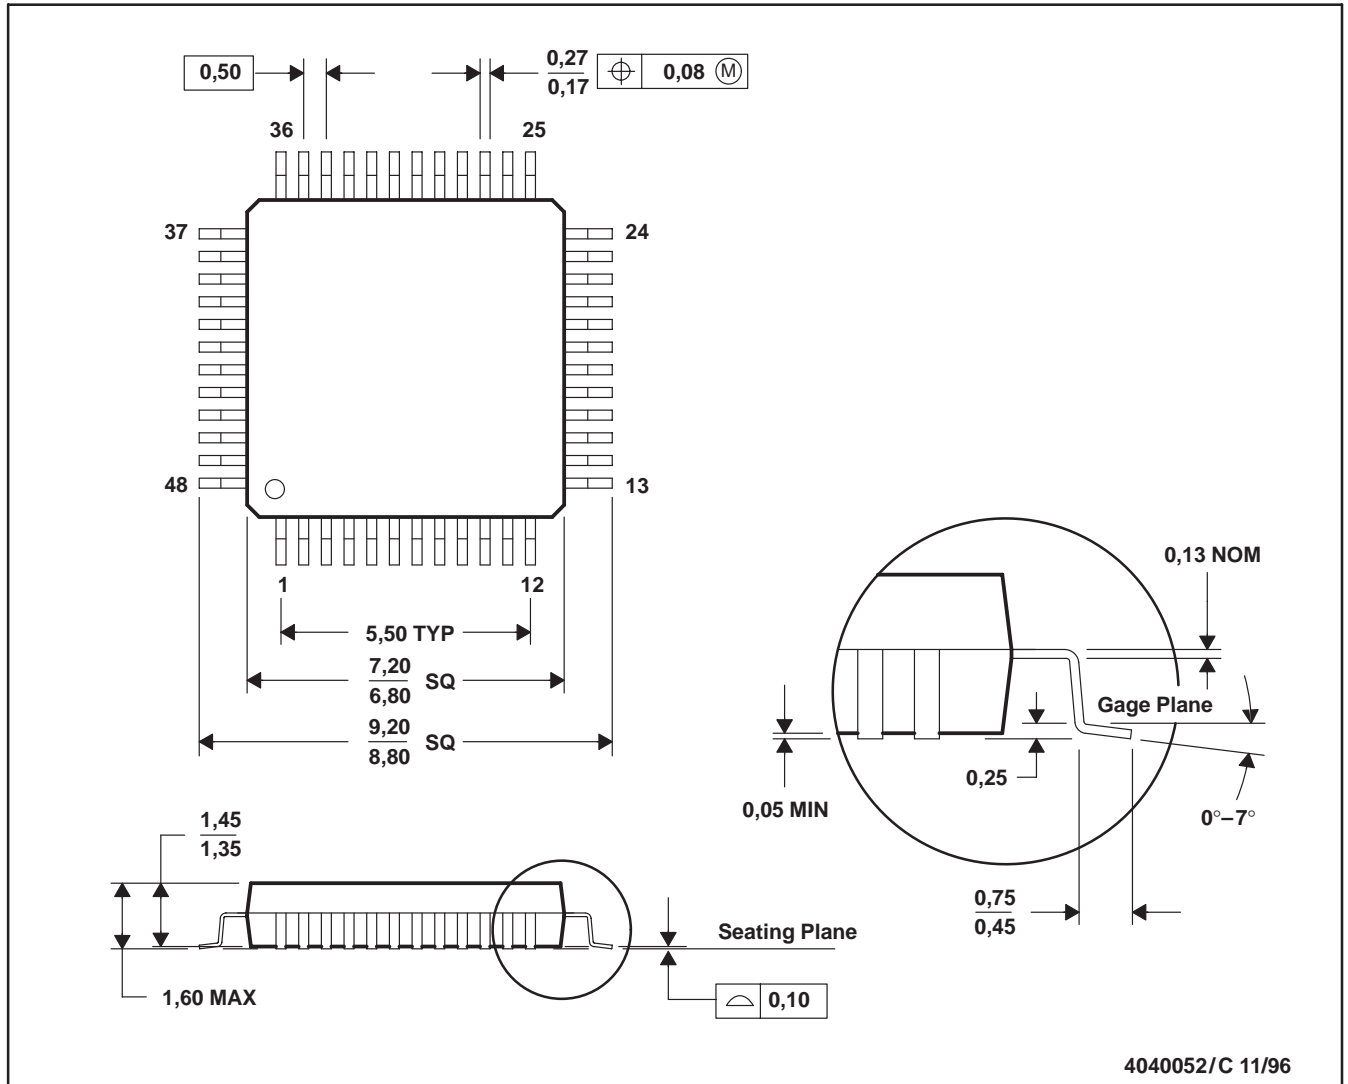

- NOTES: A. All linear dimensions are in millimeters.
 B. This drawing is subject to change without notice.
 C. Falls within JEDEC MS-026
 D. This may also be a thermally enhanced plastic package with leads connected to the die pads.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (www.ti.com/legal/termsofsale.html) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2019, Texas Instruments Incorporated