


# Application Notes: 2108965-X Antennas

## Product Description

- Flexible cable antenna
- Dipole antenna type (Dimension 15.6 x 18.6 x 0.15mm)
- Ground plane independent
- FPC with double-side adhesive for peel and stick
- Mini coax cable and connector
- Cable length: 50mm, 100mm, 150mm, 200mm
- Covers UWB channel 5,6,7,8,9 spectrum
- Antenna performance optimized to 150mm cable length

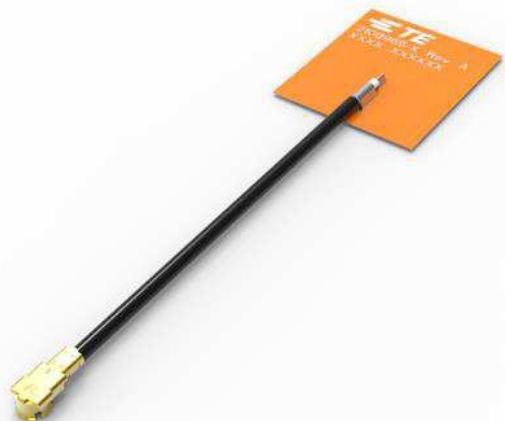

## OVERVIEW

This application note describes the RF performance of the 2108965-X (5900-8500 MHz) antenna series in free space, and how the RF performance is impacted by some common factors when the antennas are integrated into a device. -X in the part number represents antennas with differing cable lengths i.e. 2108965-1 : 50mm 2108965-2 : 100mm etc..

The common factors discussed in this document include the angle of the FPC antenna bending curve, the size and the shape of the ground plane, the antenna cable routing directions, and the clearance distance to some large metallic structures nearby the antennas. The large metallic structures can be the presentative of a different PCB ground plane, metallic enclosure of the device, a display, or any large metallic part inside the device.

This document covers many common installation scenarios. If you have a scenario that is not covered in this document, please contact us to discuss your design-in requirements.

Click on the sections in the Table of Contents below to jump directly to the area of interest.

## TABLE OF CONTENTS

1. [Basic Antenna Specification](#)
  - 1 a. [Electrical, Mechanical & Environmental Performance](#)
  - 1 b. [Frequency Bands](#)
2. [RF Performance in Free Space](#)
  - 2 a. [Return Loss](#)
  - 2 b. [Total Efficiency](#)
  - 2 c. [Gain Radiation Patterns 2D](#)
  - 2 d. [Gain Radiation Patterns 3D](#)
3. [Antenna Performance Variation with Different Antenna Design-in Implementation](#)
  - 3 a. [Performance Variation with FPC Bending Curve](#)
  - 3 b. [Performance Variation with Orthogonal Ground Plane](#)
  - 3 c. [Performance Variation with Co-Plane Ground Plane](#)
  - 3 d. [Performance Variation with Parallel Ground Plane](#)
  - 3 e. [Performance Variation with Parallel Floating Metal Plate \(Left Side\)](#)
  - 3 f. [Performance Variation with Parallel Floating Metal Plate \(Centered\)](#)
  - 3 g. [Performance Variation with Parallel Floating Metal Plate \(Right Side\)](#)
  - 3 h. [Performance Variation with Orthogonal Floating Metal Plate \(Centered\)](#)

## 1. BASIC ANTENNA SPECIFICATIONS

### 1 a. Electrical, Mechanical & Environmental Performance\*

Electrical	
Frequency Range (MHz)	5900-8500
VSWR	< 2.1:1
Average Efficiency	78 %
Peak Gain	4.2 dBi
Power Handling	10 Watt cw
Polarization	Linear
Mechanical	
Size mm (in.)	15.6 x 18.6 x 0.15 mm (0.61 x 0.73 x 0.006 in.)
Weight g (oz.)	<1.15 g (<0.04 oz.)
Mounting	Adhesive Tape
Mating Connectors	MHF and MHF4L type
Cable	1.13mm and 1.37mm Dia.
Environmental	
Operating Temperature	-40 to +85°C
Storage Temperature	-40 to +85°C

\* Electrical, Mechanical & Environmental Performance in this table is for the 2108965-1 antenna. For full 2108965-X datasheet, drawing, CAD files and specifications please visit [product landing page](#).

## 1 b. Frequency Bands

This antenna covers UWB channel 5,6,7,8,9 (5900 - 8500 MHz)


UWB Frequency [MHz]						
Band Group	Channel No.	Start	Center	Stop	Bandwidth	Support
0	0	249.6	499.2	749.6	499.2	X
1	1	3244.8	3494.4	3744	499.2	X
	2	3744	3993.6	4243.2	499.2	X
	3	4243.2	4492.8	4742.4	499.2	X
	4	3328	3993.6	4659.2	1331.2	X
2	5	6240	6489.6	6739.2	499.2	✓
	6	6739.2	6988.8	7238.4	499.2	✓
	7	5948.8	6489.6	7030.4	1081.6	✓
	8	7238.4	7488	7737.6	499.2	✓
	9	7737.6	7987.2	8236.8	499.2	✓
	10	8236.8	8486.4	8736	499.2	X
	11	7321.6	7987.2	8652.8	1331.2	X
	12	8736	8985.6	9235.2	499.2	X
	13	9235.2	9484.8	9734.4	499.2	X
	14	9734.4	9984	10233.6	499.2	X
	15	8807.315	9484.8	10162.285	1354.97	X

## 2. RF PERFORMANCE IN FREE SPACE

### 2 a. Return Loss

#### Test Setup



- VNA (100MHz-8.5GHz)
- The antenna is placed on a PC plastic in the size of 165mm x 100mm x 2mm

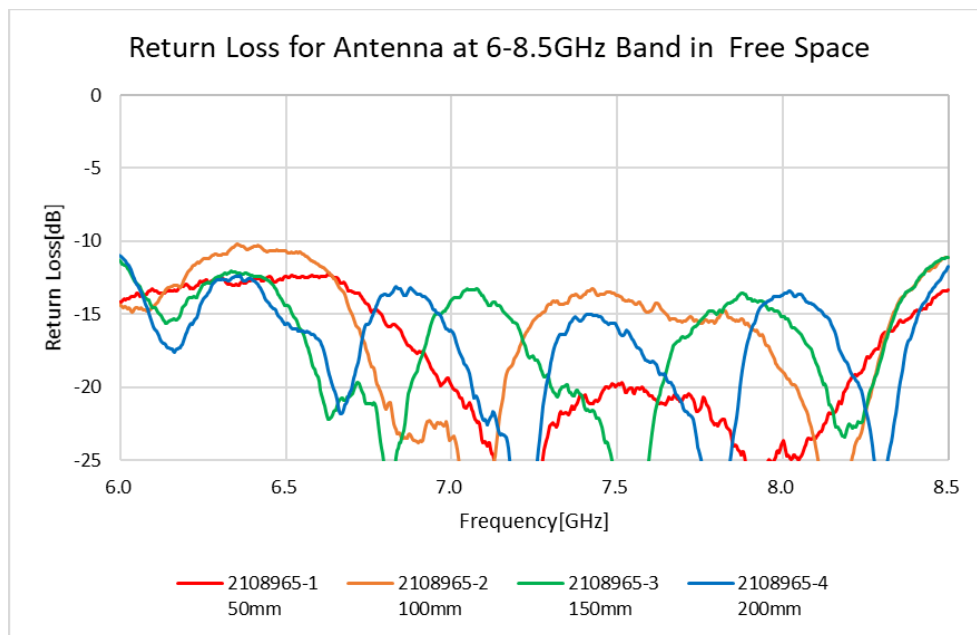

## 2 b. Total Efficiency



### Test Setup

- Antenna Anechoic Chamber (100MHz-8.5GHz)
- The antenna is placed on a PC plastic in the size of 165mm x 100mm x 2mm

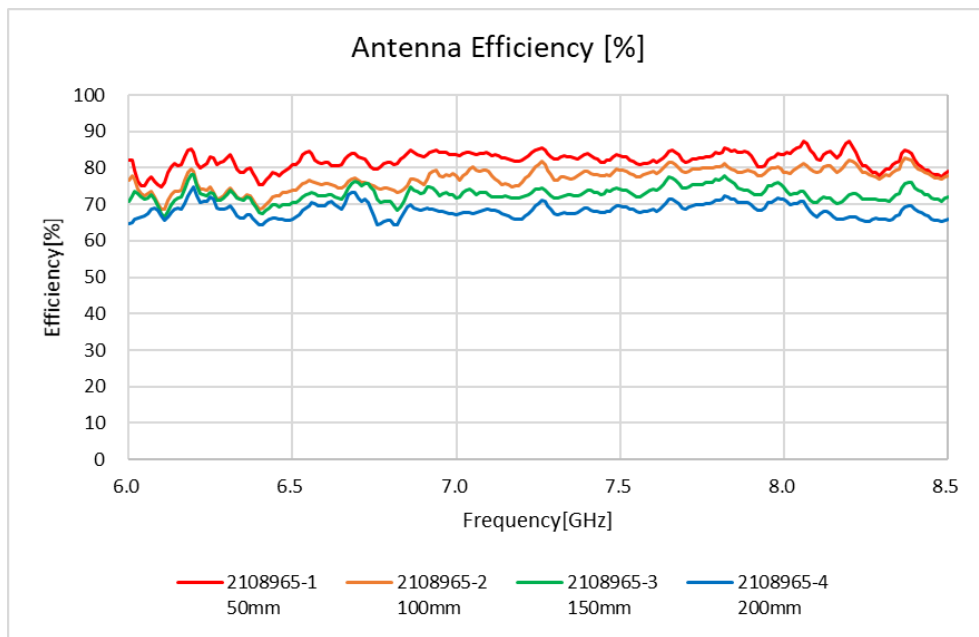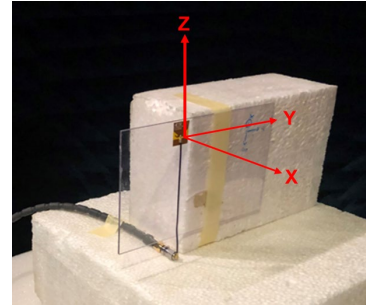



## 2 c. Gain Radiation Patterns 2D

Total Gain Radiation Patterns (2D) of the Antenna with 100mm Cable Length  
(PN: 2108965-2)

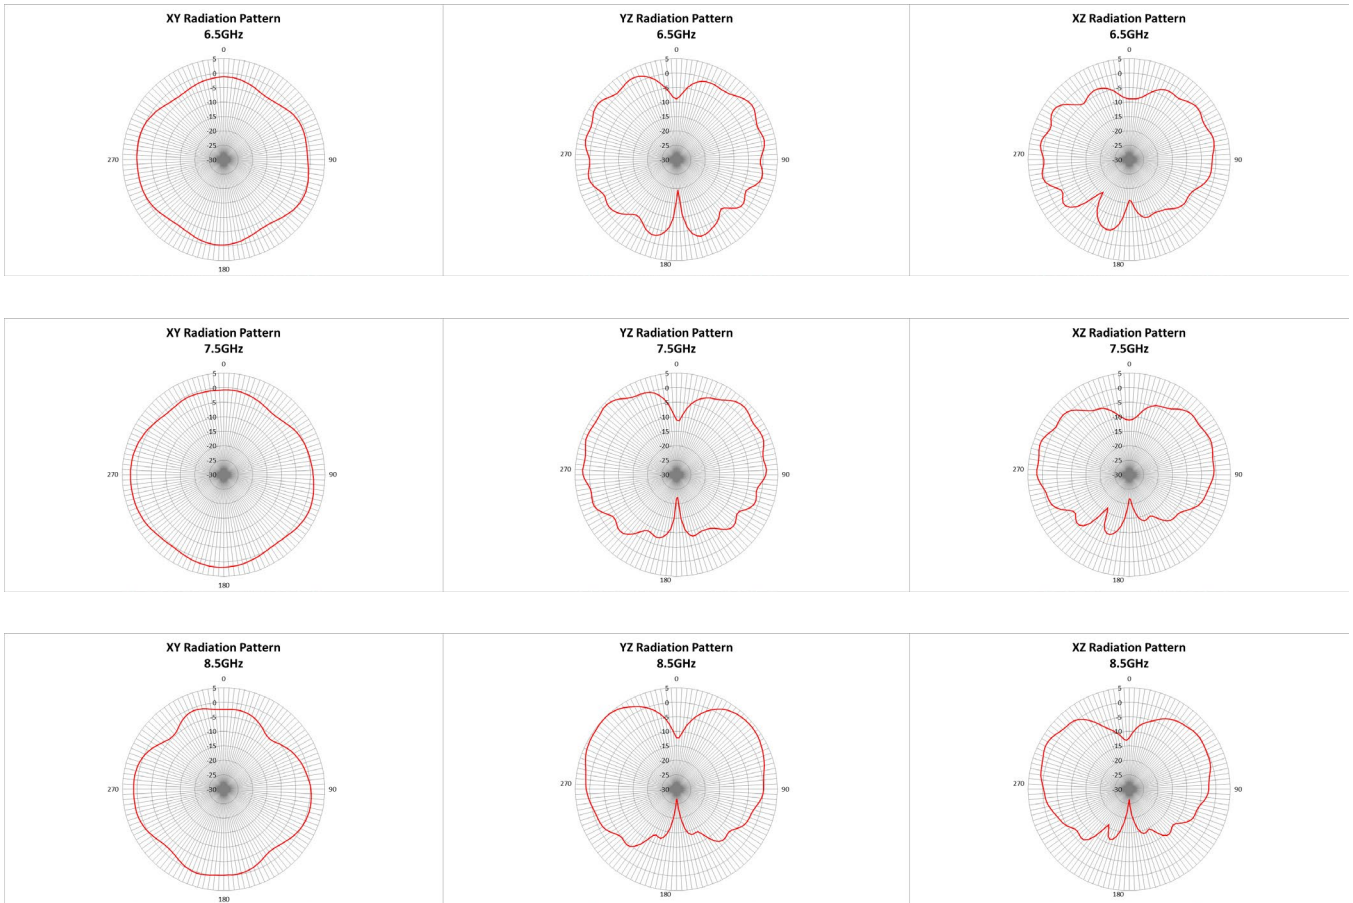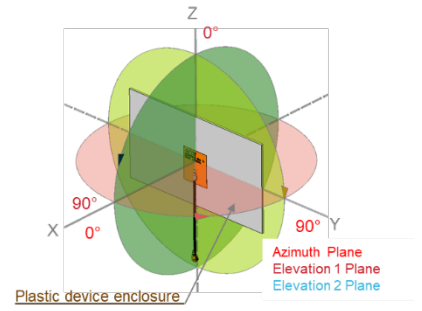


## 2 d. Gain Radiation Patterns 3D

Total Gain Radiation Patterns (3D) of the Antenna with 100mm Cable Length  
(PN: 2108965-2)

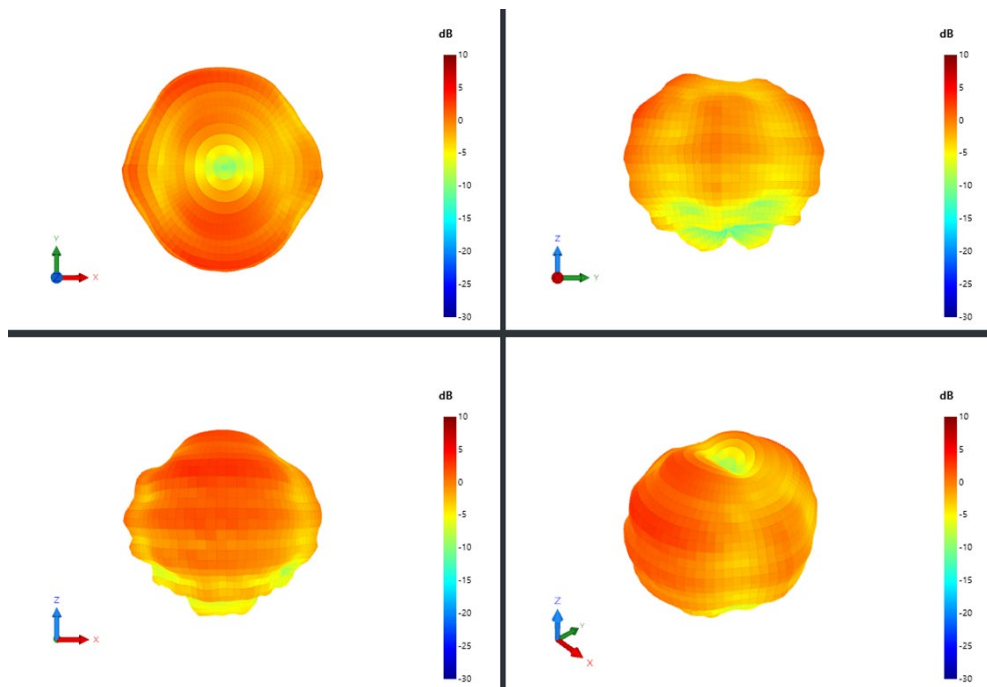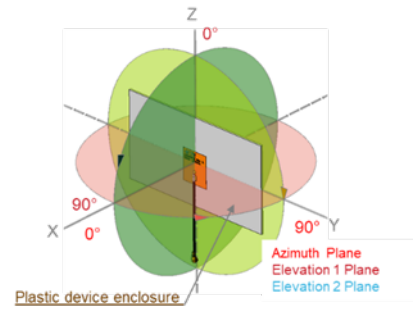


3D Radiation pattern 6.5GHz

## 2 d. Gain Radiation Patterns 3D Contd.

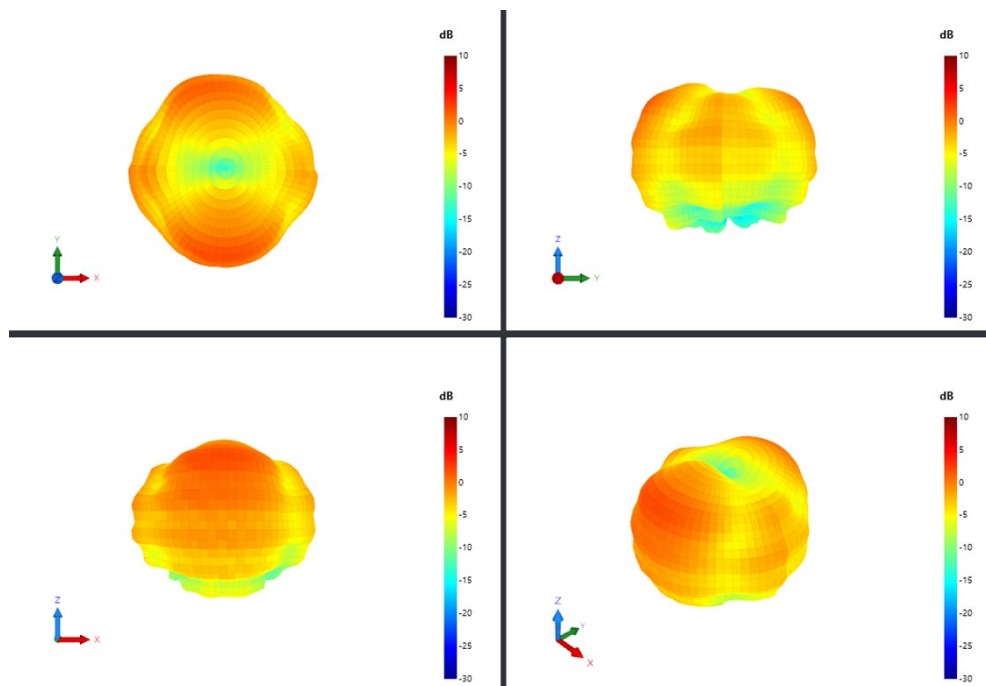

3D Radiation pattern 7.5GHz

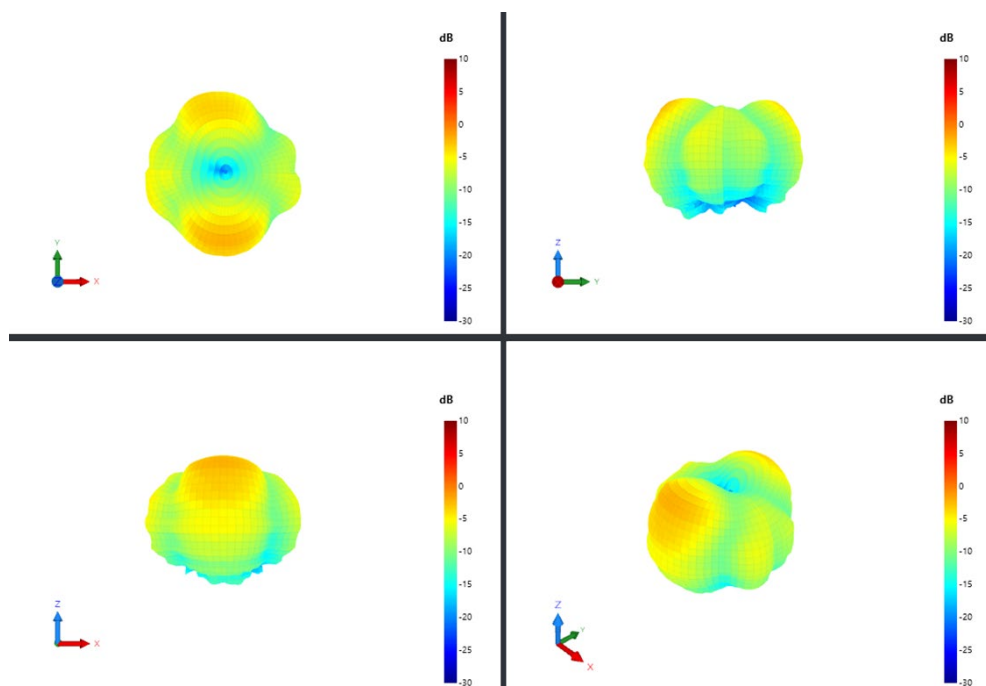


3D Radiation pattern 8.5GHz




### 3. ANTENNA PERFORMANCE VARIATION WITH DIFFERENT ANTENNA DESIGN-IN IMPLEMENTATION

#### 3 a. Performance Variation with FPC Bending Curve

This section shows the effect on return loss of bending the antenna by 10°, 20° and 30° vs a flat position. The effect on return loss is shown in the plots below at various frequencies. This test was conducted on an antenna with a cable length of 100mm (PN: 2108965-2).

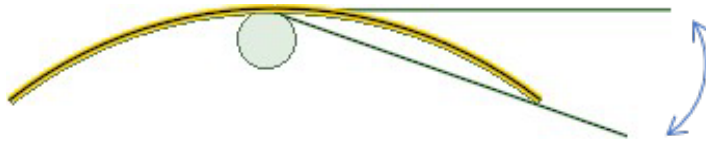


Bending angle = 10°, 20°, 30°

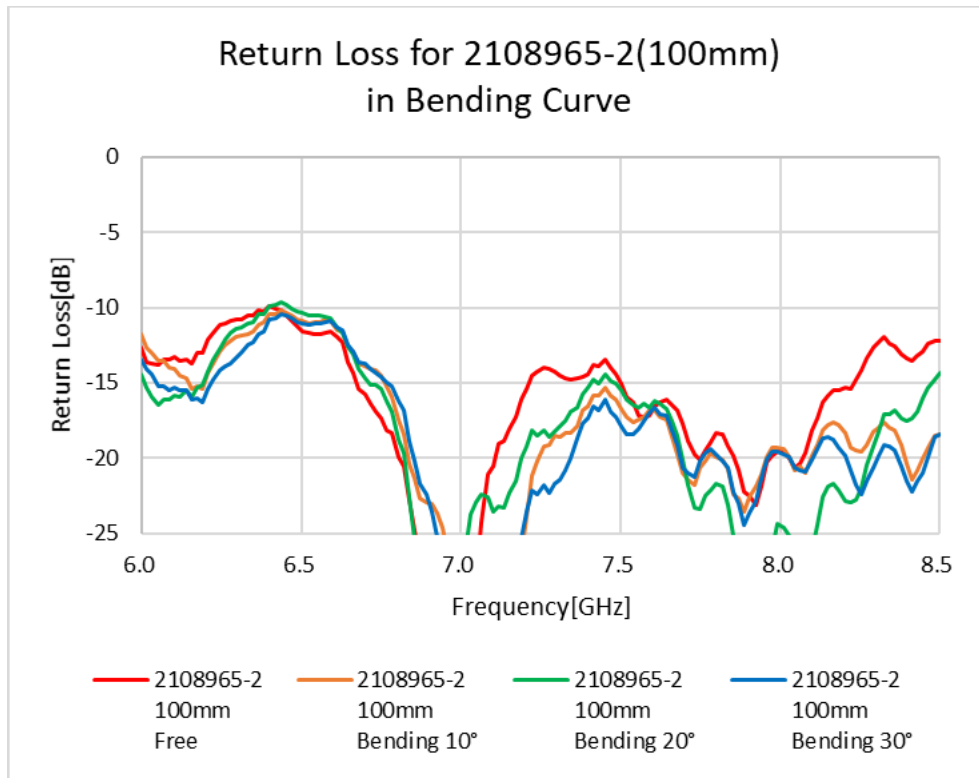

### 3 b. Performance Variation with Orthogonal Ground Plane


This section shows the effect on return loss of positioning the antenna in the vicinity of various sizes of orthogonally placed ground planes. The antenna is fed from the mini coax connector at the edge of the PCB ground plane. Ensure the cable bending curve doesn't violate the minimum bending radius (especially for 50 mm cable).

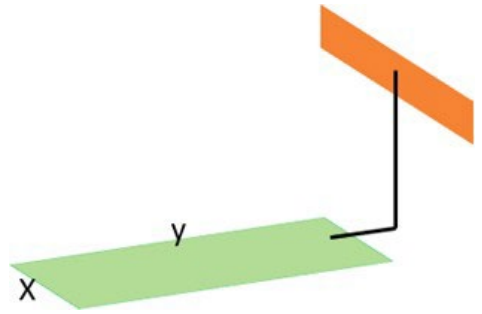

Variables:


Board Size (mm)	X	Y
Board 50x50	50mm	50mm
Board 50x75	50mm	75mm
Board 50x100	50mm	100mm
Board 100x50	100mm	50mm
Board 100x75	100mm	75mm
Board 100x100	100mm	100mm

#### 50mm Cable

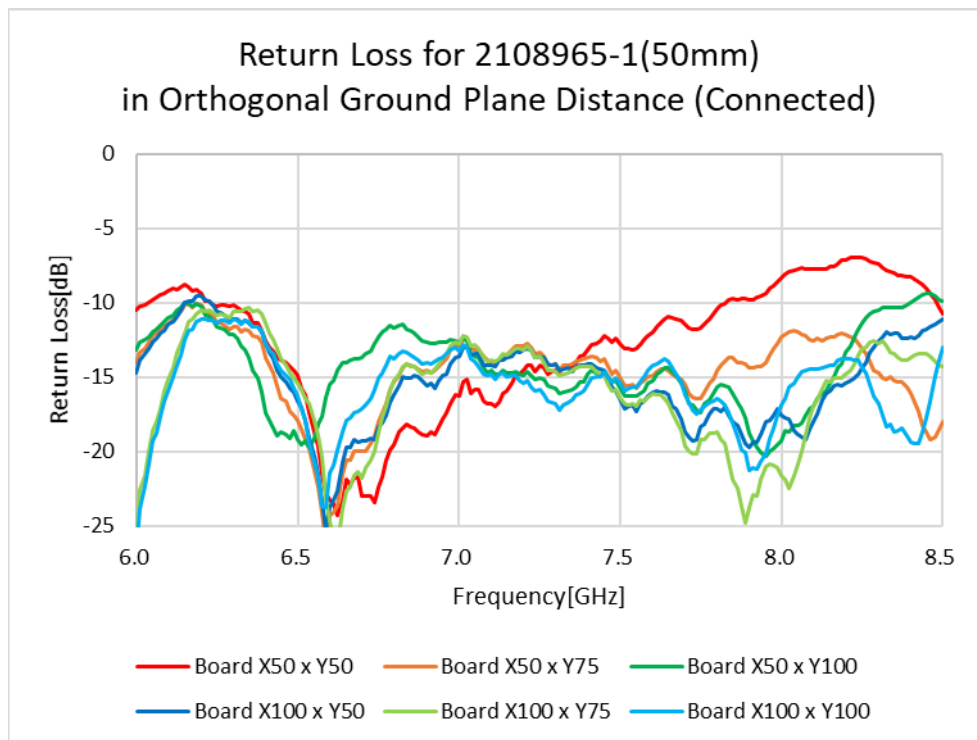


### 3 b. Performance Variation with Orthogonal Ground Plane Contd.

#### 100mm Cable

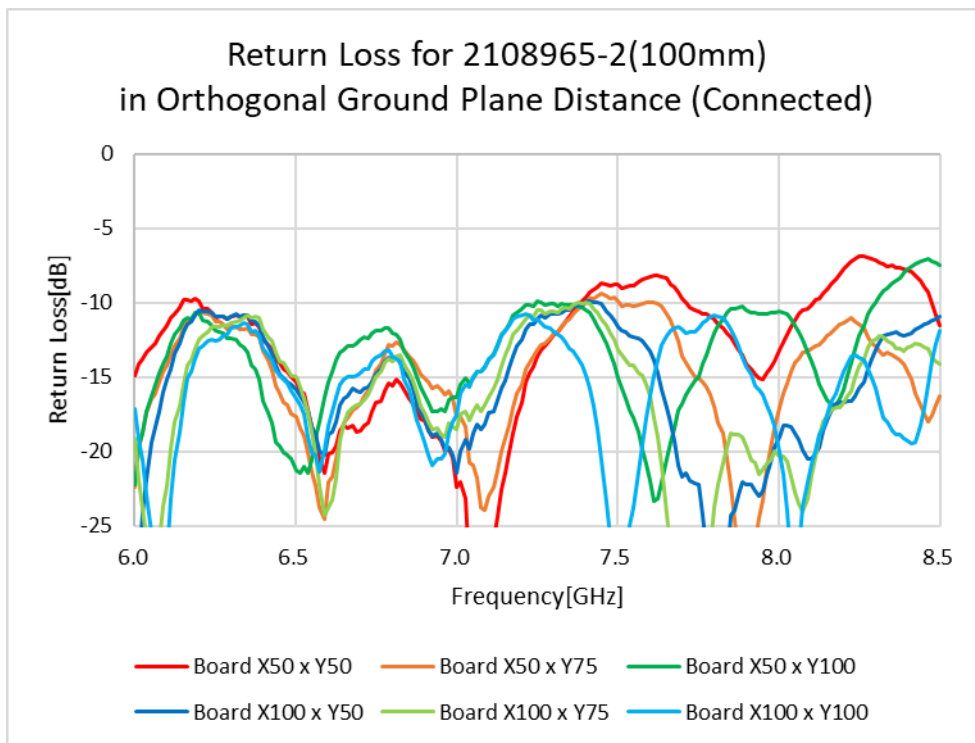


#### 150mm Cable

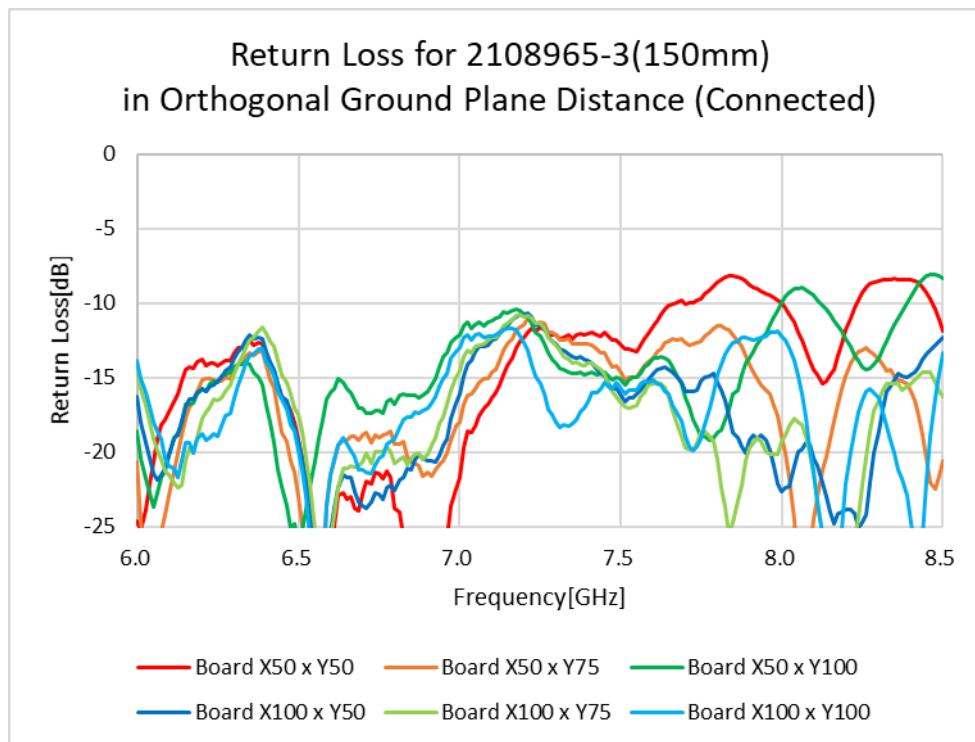


### 3 b. Performance Variation with Orthogonal Ground Plane Contd.

#### 200mm Cable

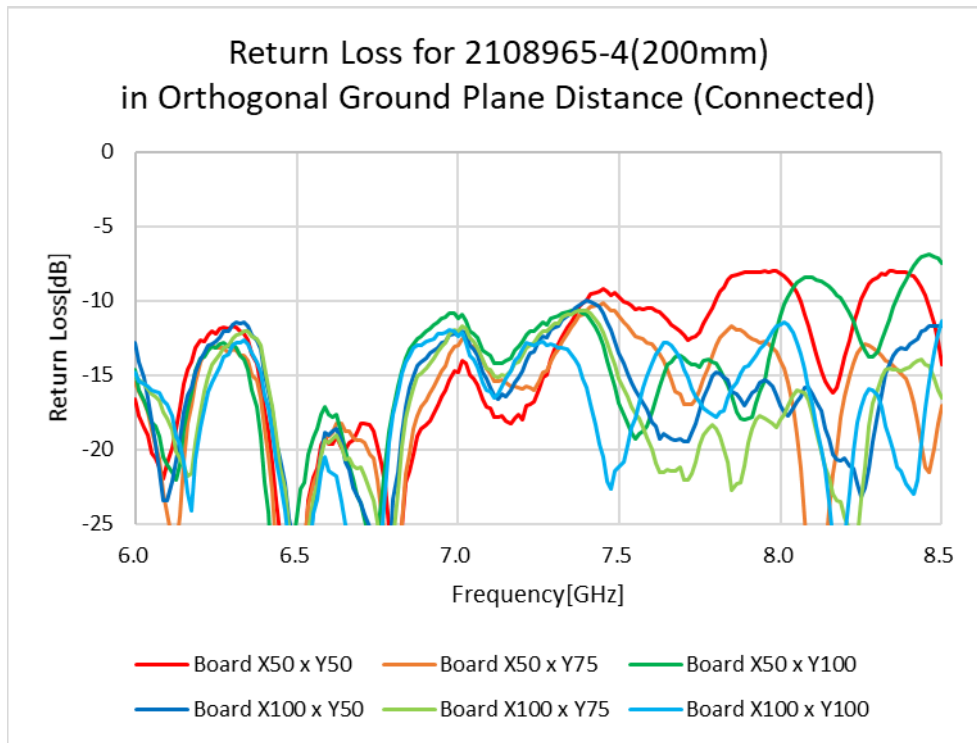

### 3 b. Performance Variation with Orthogonal Ground Plane Contd.


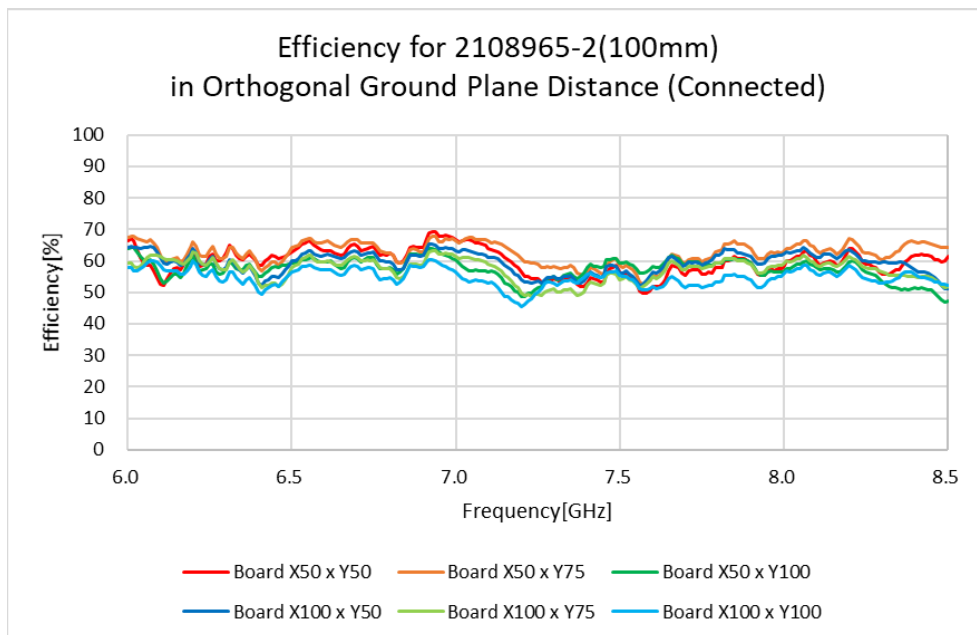


### 3 c. Performance Variation with Co-Plane Ground Plane


This section shows the effect on return loss of positioning the antenna in line with the ground plane (50x100mm). The antenna is fed from the mini coax connector at the edge of the PCB ground plane.

Variables:

X=50mm, Y=100mm

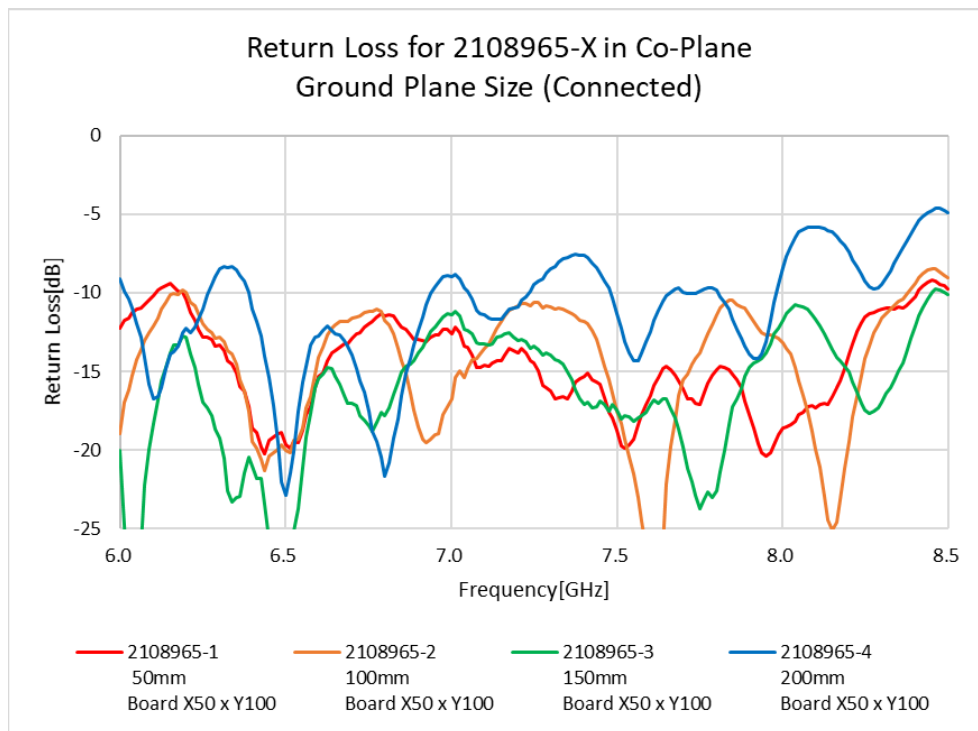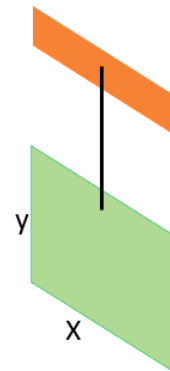



### 3 c. Performance Variation with Co-Plane Ground Plane Contd.

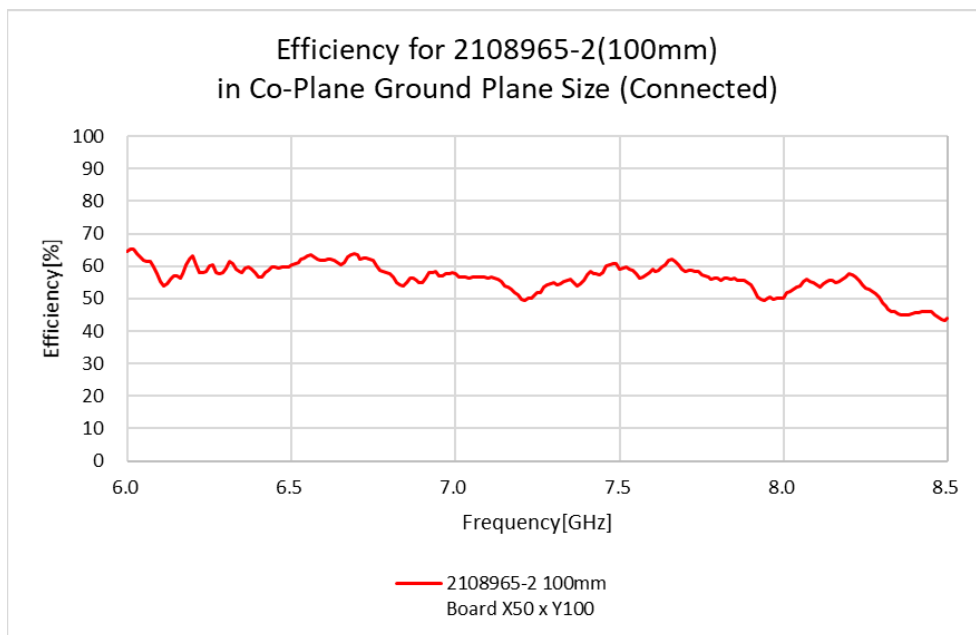


### 3 d. Performance Variation with Parallel Ground Plane

This section shows the effect on return loss of positioning the antenna parallel with the ground plane (100x125mm). The antenna is fed from the mini coax connector at the edge of the PCB ground plane.

Variables:  
100mm, Y=125mm

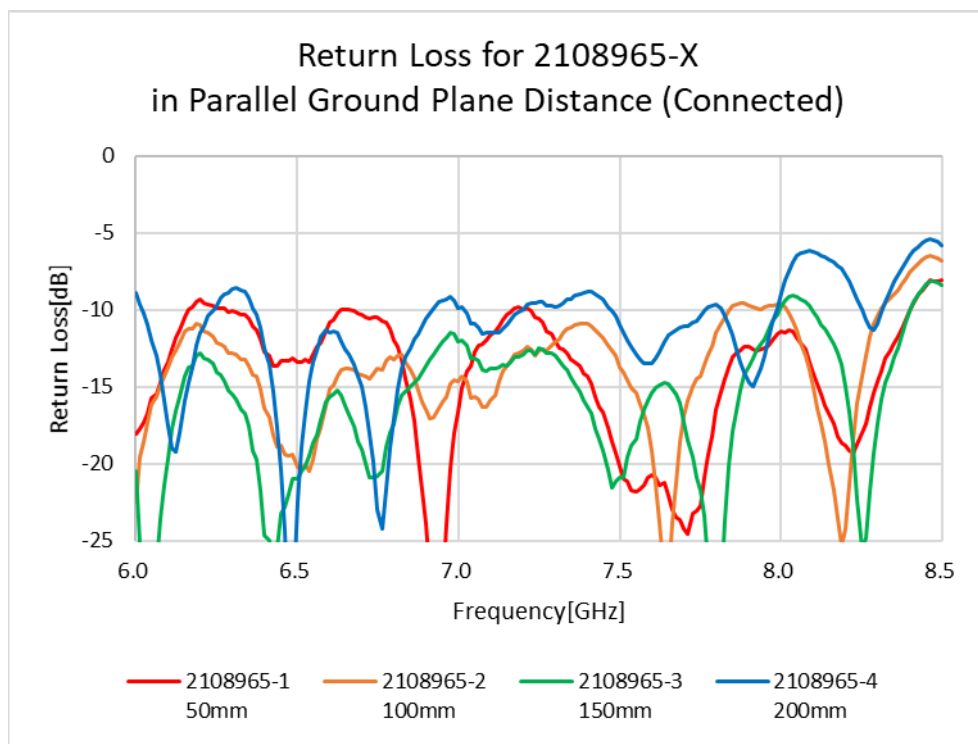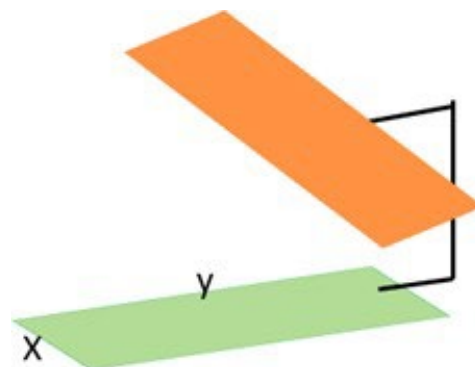

### 3 d. Performance Variation with Parallel Ground Plane Contd.

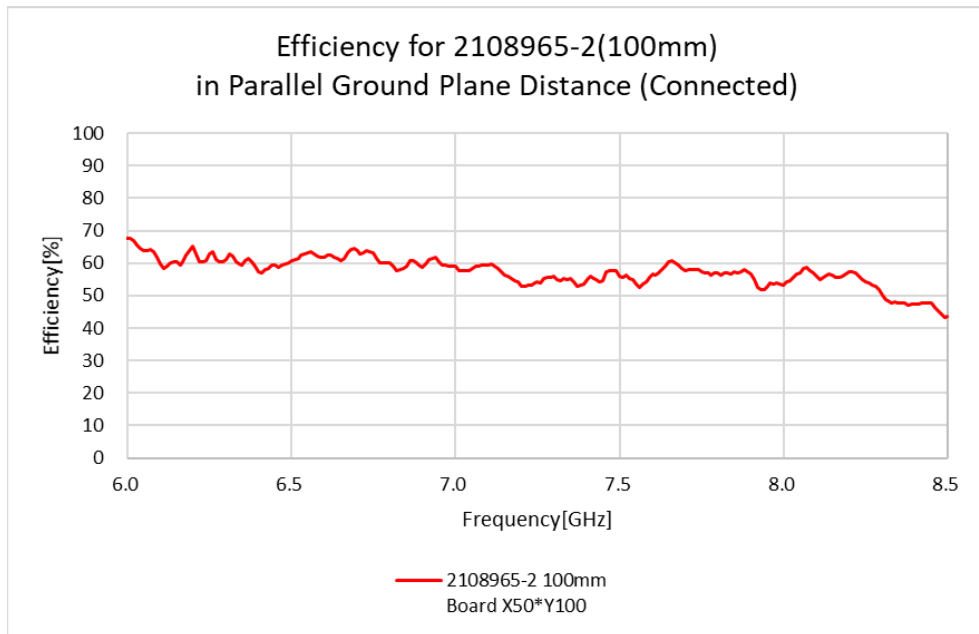



### 3 e. Performance Variation with Parallel Floating Metal Plate (Left Side)

This section shows the effect on return loss of positioning the antenna parallel with a floating metal plate (75x75mm), in various distances to the left of the antenna. The antenna is fed from the mini coax connector at the edge of the PCB ground plane.



Variables:

X=50mm, Y=100mm


a=75mm, b=75mm

d = 10mm, 20mm, 30mm, infinity (without the floating metal plate)

Antenna cable length = 100mm (PN: 2108965-2)

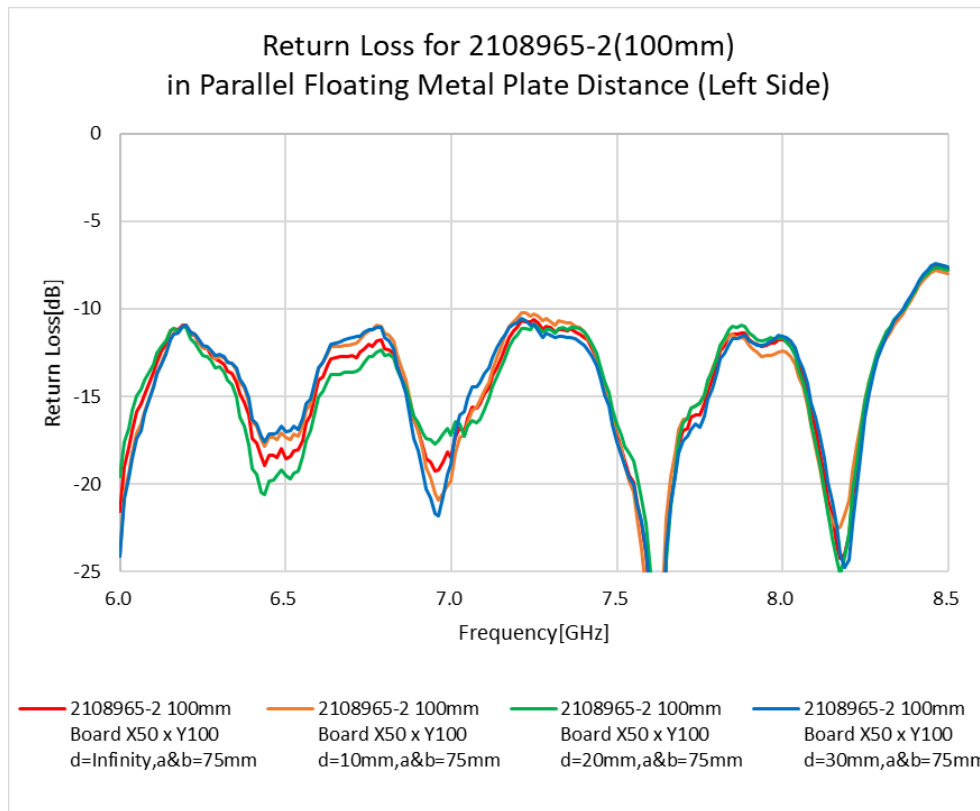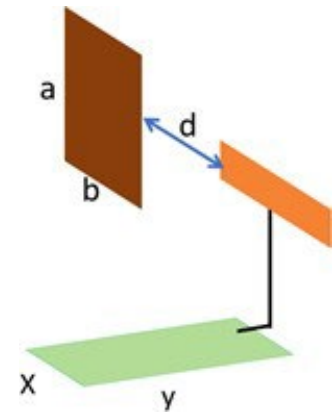

### 3 e. Performance Variation with Parallel Floating Metal Plate (Left Side) Contd.

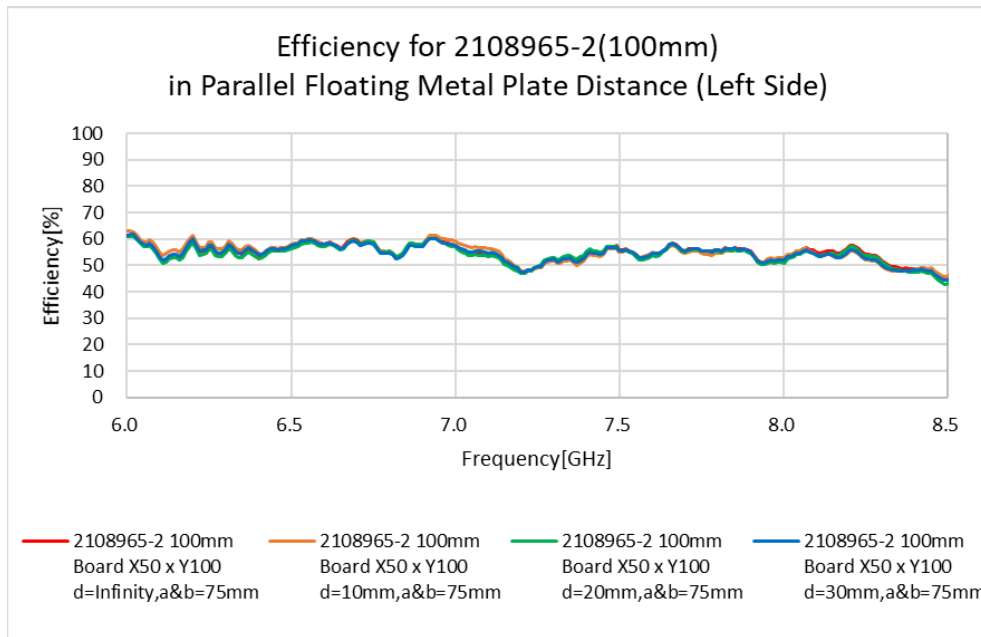

### 3 f. Performance Variation with Parallel Floating Metal Plate (Centered)

This section shows the effect on return loss of positioning the antenna centrally with a floating metal plate in various distances. The antenna is fed from the mini coax connector at the edge of the PCB ground plane.



Variables:

X=50mm, Y=100mm


a=75mm, b=75mm

d = 10mm, 20mm, 30mm, infinity (without the floating metal plate)

Antenna cable length = 100mm (PN: 2108965-2)

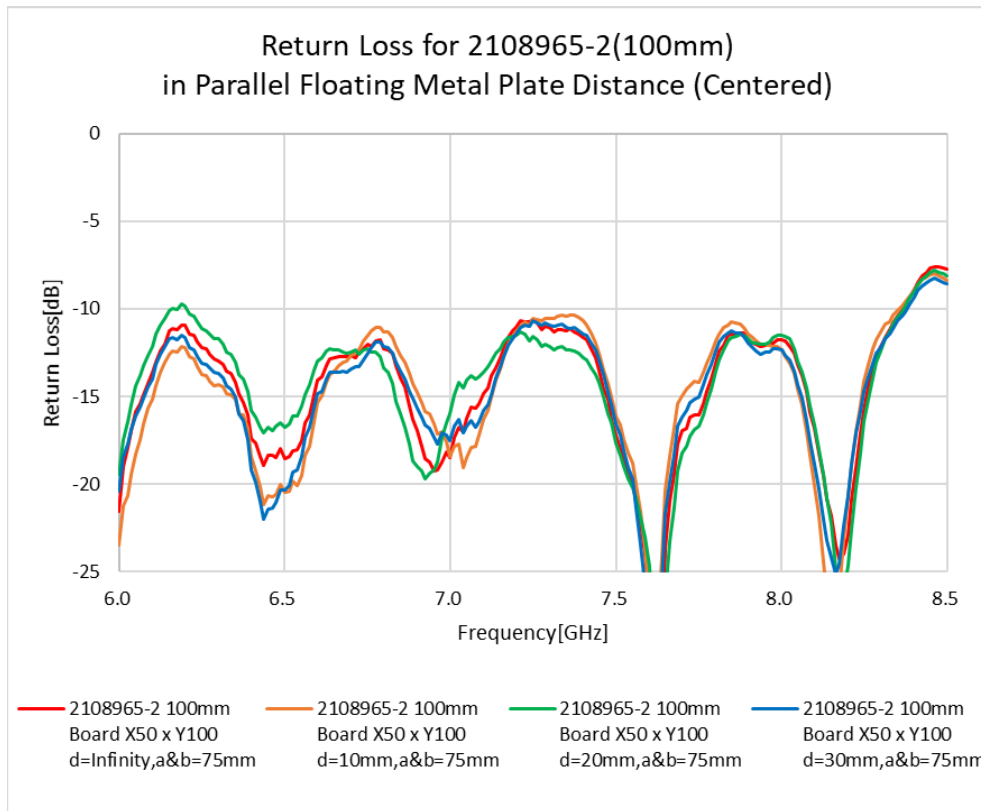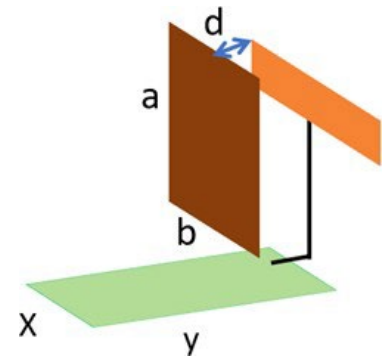

### 3 f. Performance Variation with Parallel Floating Metal Plate (Centered) Contd.

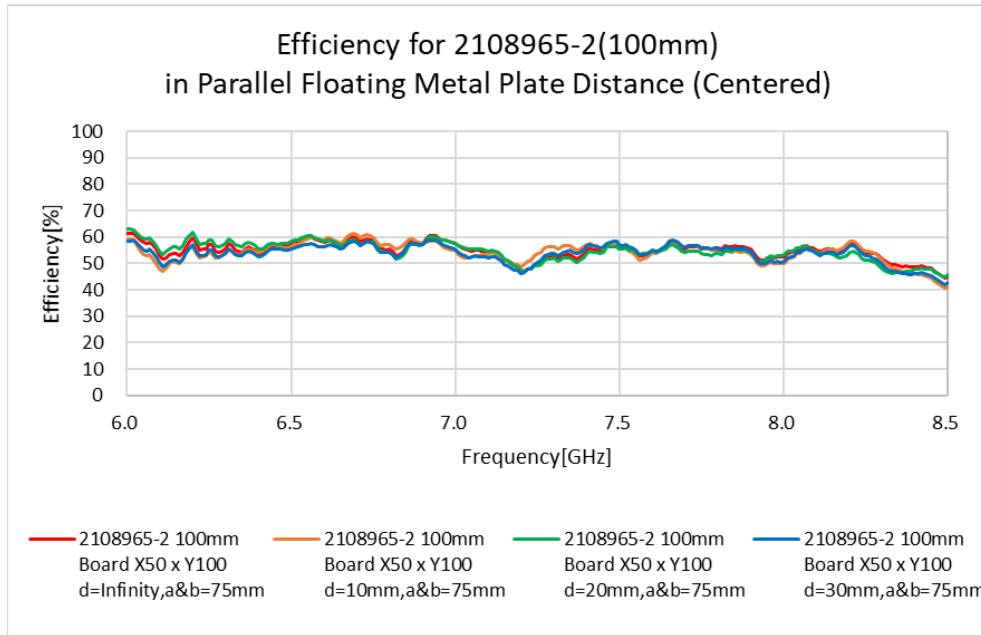

### 3 g. Performance Variation with Parallel Floating Metal Plate (Right Side)

This section shows the effect on return loss of positioning the antenna parallel with a floating metal plate in various distance to the right of the antenna. The antenna is fed from the mini coax connector at the edge of the PCB ground plane.



Variables:

X=50mm, Y=100mm


a=75mm, b=75mm

d = 10mm, 20mm, 30mm, infinity (without the floating metal plate)

Antenna cable length = 100mm (PN: 2108965-2)

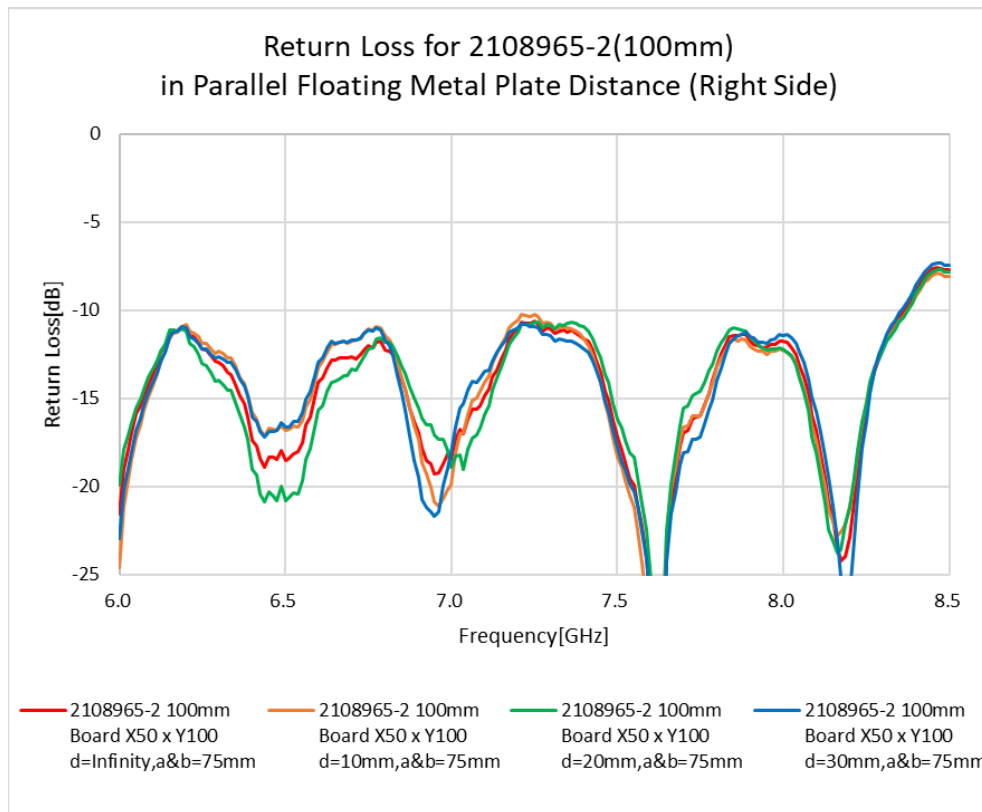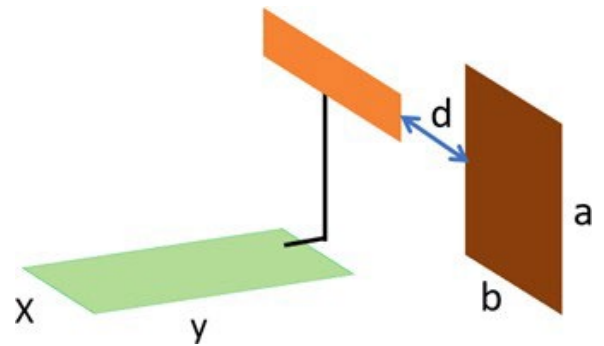

### 3 g. Performance Variation with Parallel Floating Metal Plate (Right Side) Contd.

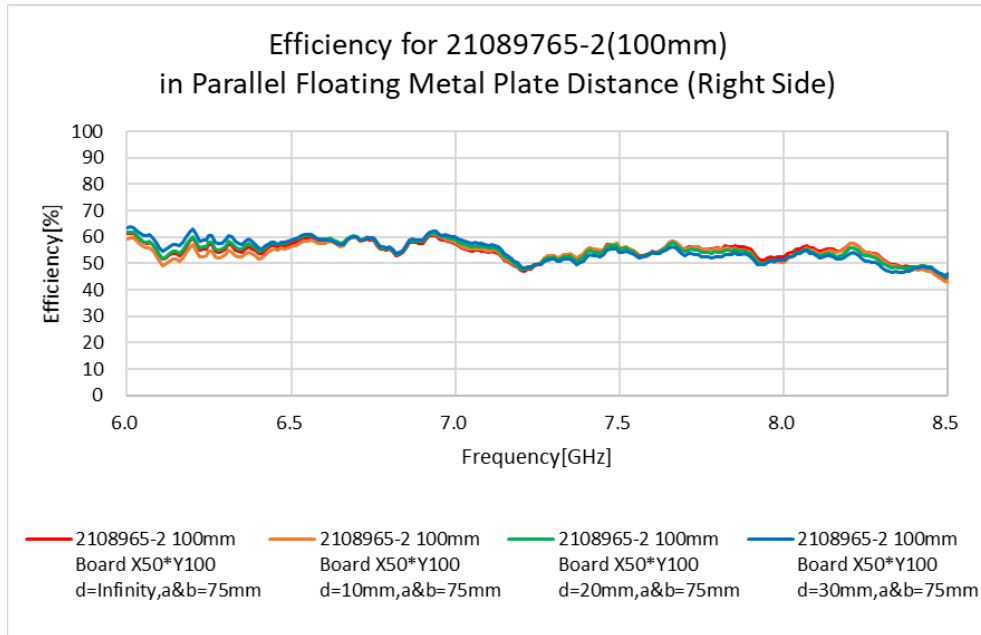

### 3 h. Performance Variation with Orthogonal Floating Metal Plate (Centered)

This section shows the effect on return loss of positioning the antenna orthogonally with a floating metal plate at various height to the PCB ground plane. The antenna is fed from the mini coax connector at the edge of the PCB ground plane.



Variables:

X=50mm, Y=100mm


a=75mm, b=75mm, d = 20mm

h = 25mm, 50mm, 100mm, infinity (without the floating metal plate)

Antenna cable length = 100mm (PN: 2108965-2)

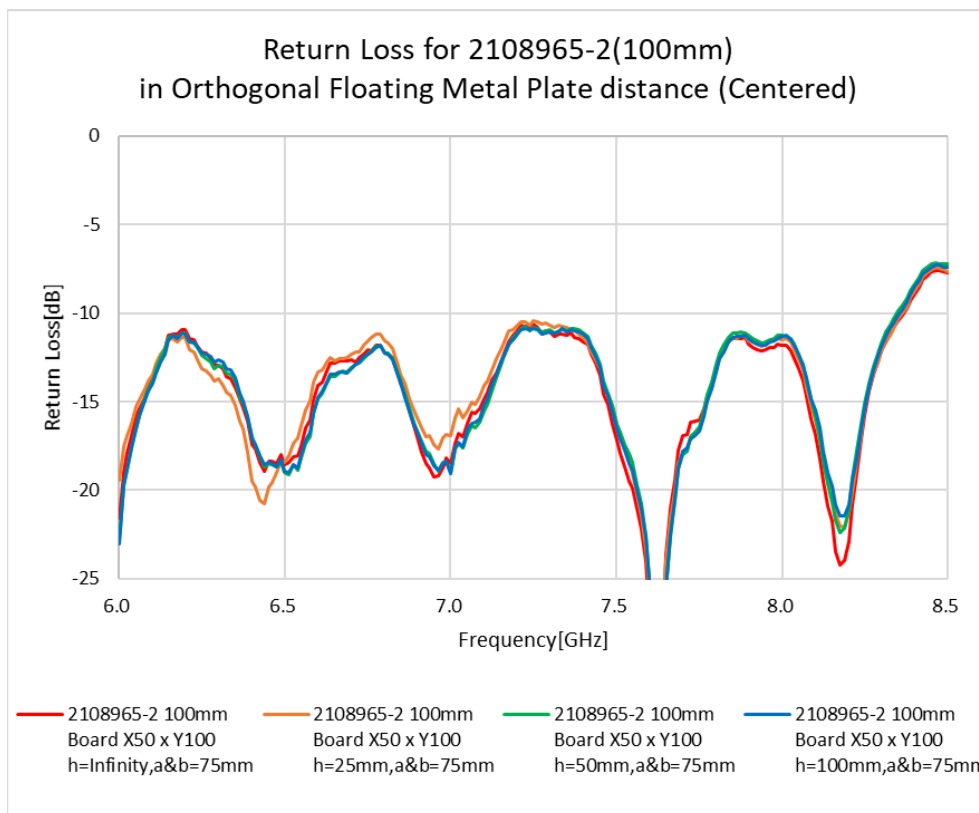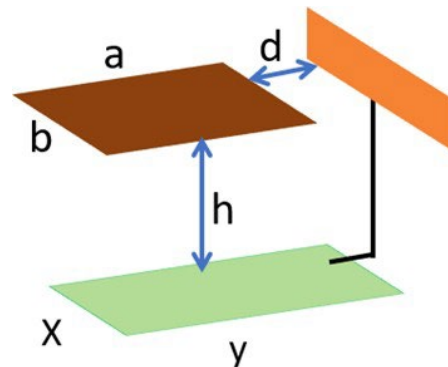

### 3 h. Performance Variation with Orthogonal Floating Metal Plate (Centered) Contd.

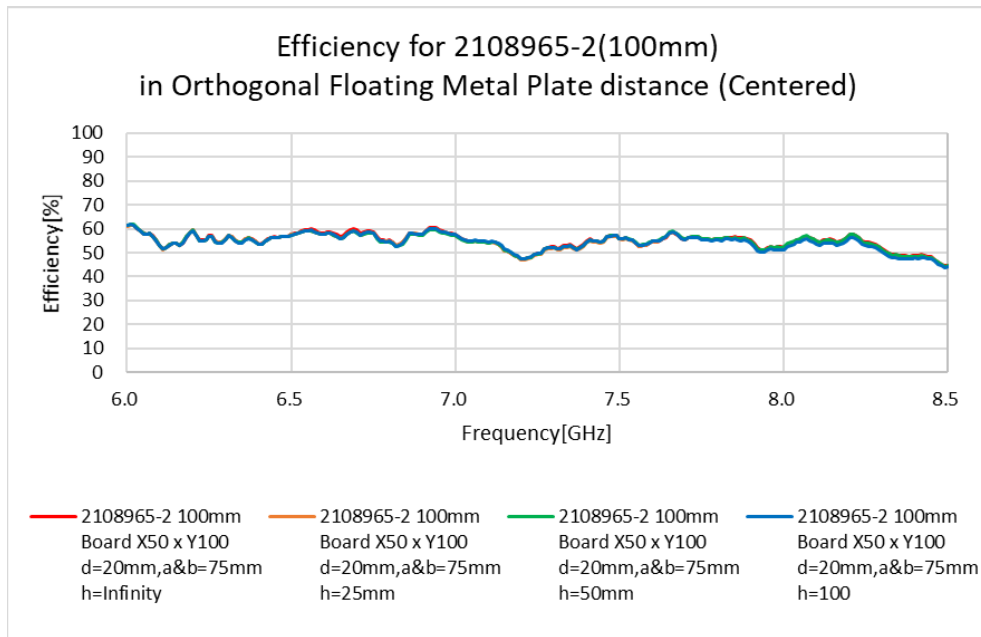



---

## TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

## te.com

TE, and TE connectivity (logo) are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not to exceed one (1) year from the original date of the end product purchase.

©2022 TE Connectivity. All Rights Reserved.

11/19 Original

---