


SAC-4P-M12MSS/ 3,0-PUR PE SH - Power cable



1424105

<https://www.phoenixcontact.com/us/products/1424105>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Power cable, 4-position, PUR halogen-free, orange RAL 2003, shielded (Advanced Shielding Technology), Plug straight M12, coding: S, on free cable end, cable length: 3 m, for AC current up to 12 A/690 V

Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Protection against incorrect connection using special S-coding
- Our standard: robust halogen-free PUR cable
- Shield power reliably – 360° shielding to reduce electromagnetic loads

Commercial data

| | |
|--------------------------------------|---------------------|
| Item number | 1424105 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | BF05 |
| Product key | BF1CCP |
| Catalog page | Page 289 (C-2-2019) |
| GTIN | 4046356693103 |
| Weight per piece (including packing) | 459.4 g |
| Weight per piece (excluding packing) | 460 g |
| Customs tariff number | 85444290 |
| Country of origin | PL |

1424105

<https://www.phoenixcontact.com/us/products/1424105>

Technical data

Product properties

| | |
|----------------------|--------------|
| Product type | Power cable |
| Application | Power supply |
| Number of positions | 4 |
| No. of cable outlets | 1 |
| Shielded | yes |
| Coding | S |

Data management status

| | |
|------------------|----|
| Article revision | 07 |
|------------------|----|

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Material specifications

| | |
|--|------------------------------|
| Flammability rating according to UL 94 | V0 |
| Material of grip body | PP |
| Contact material | CuZn |
| Contact surface material | Ni/Au |
| Contact carrier material | PA |
| Material for screw connection | Zinc die-cast, nickel-plated |

Electrical properties

| | |
|-----------------------|----------------------------|
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage U_N | 690 V AC |
| Nominal current I_N | 12 A |

Mechanical properties

Mechanical data

| | |
|-----------------------------|-------|
| Insertion/withdrawal cycles | > 100 |
|-----------------------------|-------|

Connector

Connection 1

| | |
|-------------|-------------------|
| Type | Plug straight M12 |
| Coding type | S (Power) |

Connection 2

| | |
|------|----------------|
| Type | free cable end |
|------|----------------|

Cable/line

| | |
|--------------|-----|
| Cable length | 3 m |
|--------------|-----|


SAC-4P-M12MSS/ 3,0-PUR PE SH - Power cable



1424105

<https://www.phoenixcontact.com/us/products/1424105>

PUR halogen-free orange shielded [PUR]

| | |
|---|--|
| Dimensional drawing |  |
| UL AWM Style | 20234 / 10492 (80°C/1000 V) |
| Number of positions | 4 |
| Shielded | yes |
| Cable type | PUR halogen-free orange shielded [PUR] |
| Conductor cross section | 4x 1.5 mm ² |
| Wire diameter incl. insulation | ≤ 2.5 mm |
| External cable diameter | 9.70 mm ±0.3 mm |
| Outer sheath, material | PUR |
| External sheath, color | orange RAL 2003 |
| Conductor material | Bare Cu litz wires |
| Material wire insulation | PP |
| Single wire, color | black 1, black 2, black 3, green/yellow |
| Thickness, insulation | 0.40 mm |
| Thickness, outer sheath | 1.20 mm |
| Overall twist | 4 wires optimally twisted |
| Max. conductor resistance | ≤ 13.3 Ω/km (at 20 °C) |
| Insulation resistance | ≥ 10 MΩ*km (at 20 °C) |
| Nominal voltage, cable | 1000 V AC |
| Test voltage | 4260 V AC (5 min.) |
| Minimum bending radius, fixed installation | 5 x D |
| Minimum bending radius, flexible installation | 7.5 x D |
| Smallest bending radius, fixed installation | 49 mm |
| Smallest bending radius, movable installation | 73 mm |
| Dynamic load capacity (bending) | Max. bending cycles: 4000000, Bending radius: 10 x D, Traversing path: 10 m, Traversing rate: 3 m/s, Acceleration: 10 m/s ² |
| Dynamic load capacity (torsion) | Torsion: ±25 °/m |
| Halogen-free | according to VDE 0282-13 Appendix C |
| Flame resistance | in accordance with EN 60332-1-2 in acc. to UL 1581 VW1 According to CSA C 22.2 No. 210-05 FT1 |
| Resistance to oil | in accordance with DIN EN 60811-2-1 According to DIN EN 50363-10-2 |
| Other resistance | UV resistant Low adhesion |

SAC-4P-M12MSS/ 3,0-PUR PE SH - Power cable



1424105

<https://www.phoenixcontact.com/us/products/1424105>

| | |
|---------------------------------|---|
| Ambient temperature (operation) | -40 °C ... 90 °C (cable, fixed installation) |
| | -30 °C ... 90 °C (Cable, flexible installation) |

Environmental and real-life conditions

Ambient conditions

| | |
|---------------------------------|--|
| Degree of protection | IP65 |
| | IP67 (without preloading, as additional test in accordance with IEC 60529) |
| Ambient temperature (operation) | -25 °C ... 85 °C (Plug / socket) |

Standards and regulations

| | |
|--------------------------|-----------------|
| Standard designation | M12 connector |
| Standards/specifications | IEC 61076-2-111 |

SAC-4P-M12MSS/ 3,0-PUR PE SH - Power cable




1424105

<https://www.phoenixcontact.com/us/products/1424105>


Drawings

Dimensional drawing

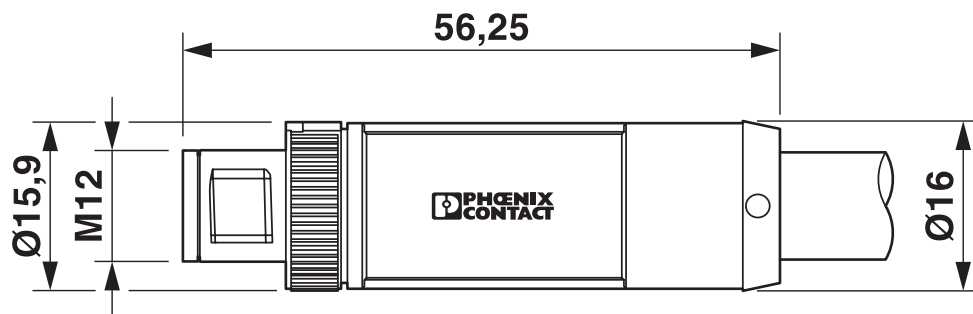

Plug, M12 x 1, straight, shielded


Circuit diagram

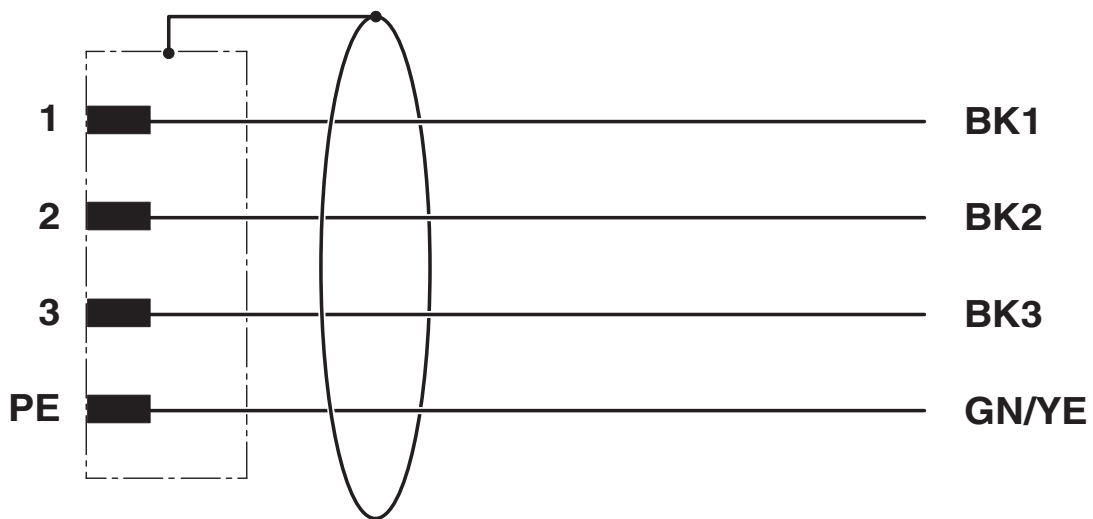

1424105

<https://www.phoenixcontact.com/us/products/1424105>

Schematic diagram

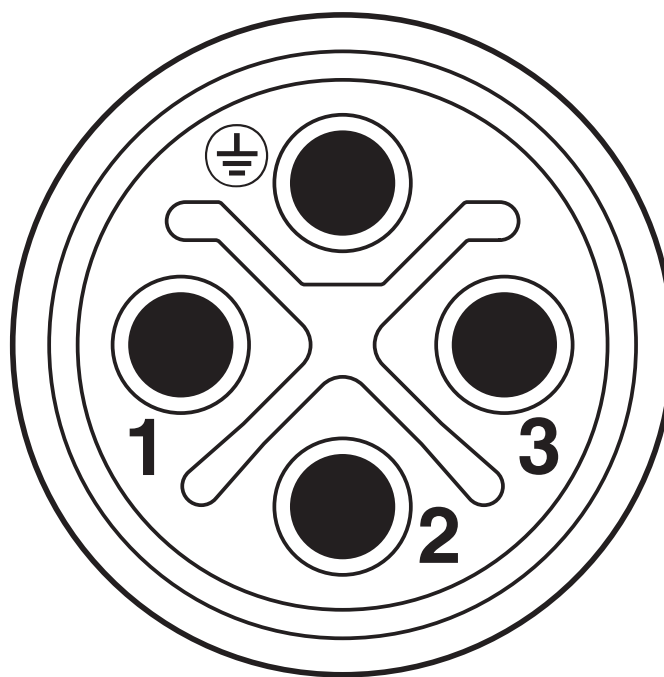

M12 plug pin assignment, 4-pos., S-coded, plug side view

SAC-4P-M12MSS/ 3,0-PUR PE SH - Power cable





1424105

<https://www.phoenixcontact.com/us/products/1424105>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1424105>

| | | | | |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  UL Listed Approval ID: FILE E 468743 | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| | 600 V | 12 A | - | - 16 |

| | | | | |
|---|-----------------------|-----------------------|-------------------|-----------------------------|
|  cUL Listed Approval ID: FILE E 468743 | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| | 600 V | 12 A | - 16 | - |

| |
|---|
|  EAC-RoHS Approval ID: RU D-DE.HB35.B.00387 |
|---|

| |
|---------------------|
| cULus Listed |
|---------------------|

SAC-4P-M12MSS/ 3,0-PUR PE SH - Power cable



1424105

<https://www.phoenixcontact.com/us/products/1424105>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27060311 |
| ECLASS-12.0 | 27060311 |
| ECLASS-13.0 | 27060327 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC001855 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

SAC-4P-M12MSS/ 3,0-PUR PE SH - Power cable



1424105

<https://www.phoenixcontact.com/us/products/1424105>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

EF3.0 Climate Change

| | |
|---------|---------------|
| CO2e kg | 2.249 kg CO2e |
|---------|---------------|

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com