




Up to 20Amps!

- **Luminaire Disconnect Connector**
- Series 873, LUMI-NUTS®


PUSH WIRE® Connector for Luminaire Disconnect, 873 Series LUMI-NUTS®




Molded in color coding for circuit wiring:
 Black = L
 White = N
 Red = dimming and switching (3-pole)
 Green = Ground (3-pole)
 Inkjet marking for additional requirements

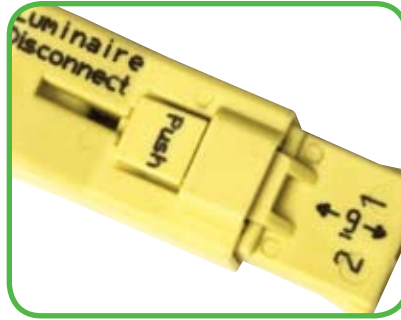


Integrated locking latch - automatic locking with mating of connectors - simple push down to disengage

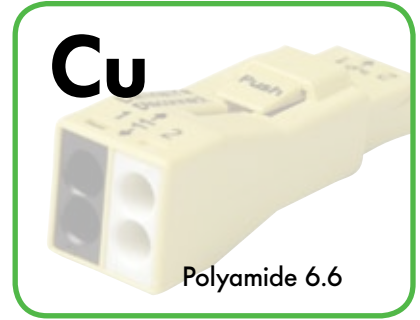


Copper (not brass) for electrical integrity. UL94V-0 rated housing for utmost in flame-retardation

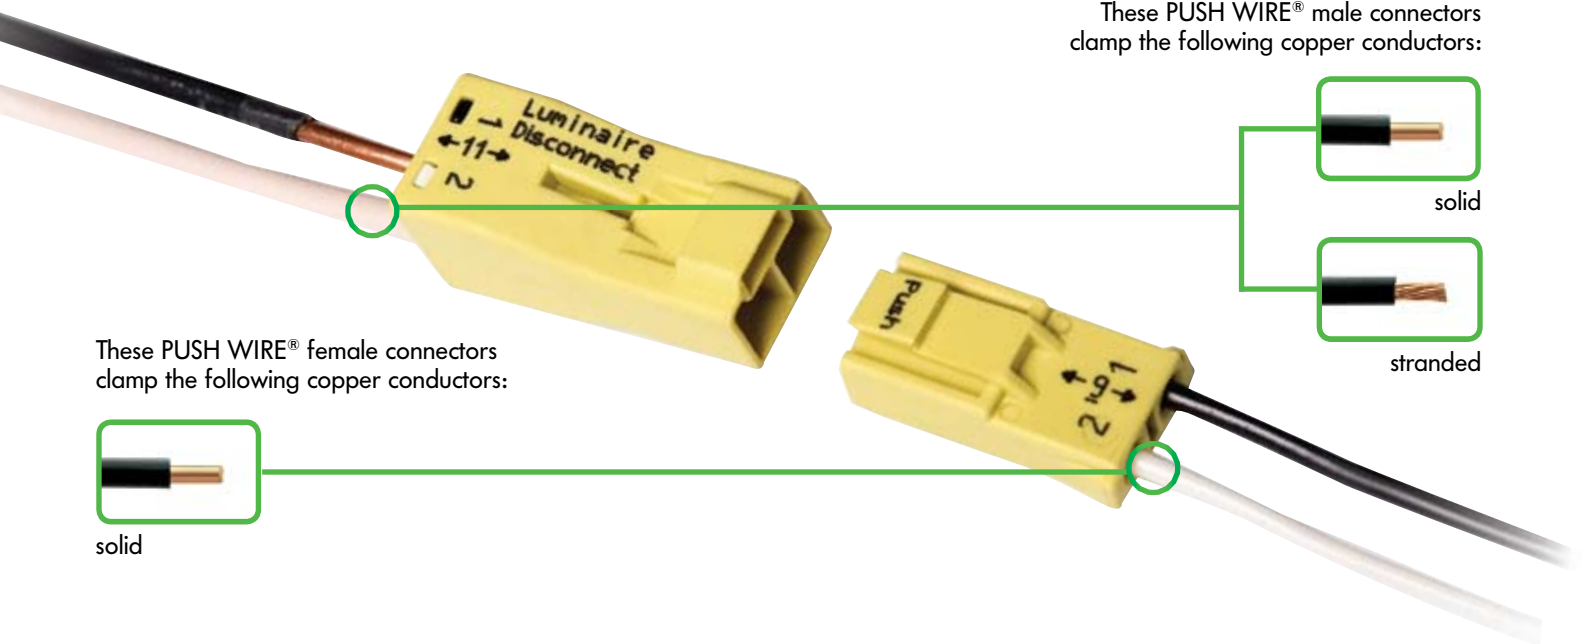

These PUSH WIRE® male connectors clamp the following copper conductors:



These PUSH WIRE® female connectors clamp the following copper conductors:

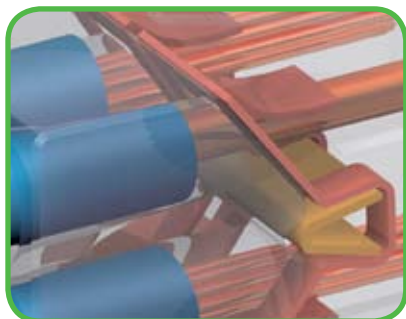

Engineered two-piece construction: Copper current bar and stainless steel spring combine to provide optimal contact pressure independent of the housing







Completely touch-proof in the unmated position





100% protected against mis-mating

PUSH WIRE® Connector for Luminaire Disconnect, 873 Series LUMI-NUTS®

Male Connector 2 x AWG 18-12 "sol." per pole 2 x AWG 16-12 ≤19 "str." per pole 600 V 20 A Current capacity at max conductor size  11-13 mm/0.47 in	Female Connector 1 x AWG 18 "sol." per pole 600 V 6 A 9-11 mm/0.39 in	Male Connector 2 x AWG 16-12 "sol." per pole 2 x AWG 16-12 ≤19 "str." per pole 600 V 20 A Current capacity at max conductor size  11-13 mm/0.47 in	Female Connector 1 x AWG 18 "sol." per pole 600 V 6 A 9-11 mm/0.39 in	Male Connector 2 x AWG 16-12 "sol." per pole 2 x AWG 16-12 ≤19 "str." per pole 600 V 20 A Current capacity at max conductor size  11-13 mm/0.47 in	Female Connector 1 x AWG 18 "sol." per pole 600 V 6 A 9-11 mm/0.39 in
---	--	---	--	---	--



Fits through 1/2 in knockout






Item No.	Pack.-unit pcs	Item No.	Pack.-unit pcs	Item No.	Pack.-unit pcs
Push-wire connectors for luminaire disconnect, 2-pole connectors		Push-wire connectors for luminaire disconnect, 3-pole connectors, for switching and dimming applications		Push-wire connectors for luminaire disconnect, 3-pole connectors, with "make first/break last" ground circuit	
873-902		873-903		873-953	
873-902/K194-4045	25 pc/box	873-903/K194-4045	20 pc/box	873-953/VE00-0500	500 pc/bag
873-902/VE00-0500	500 pc/bag	873-903/VE00-0500	500 pc/bag		
873-902/VE00-5000	5,000 pc/bag				

Optimal Installation

Exclusive dual port design *eliminates* the need for additional splicing connectors when wiring multiple luminaires, *minimizing component costs and labor.*

Daisy chain to...

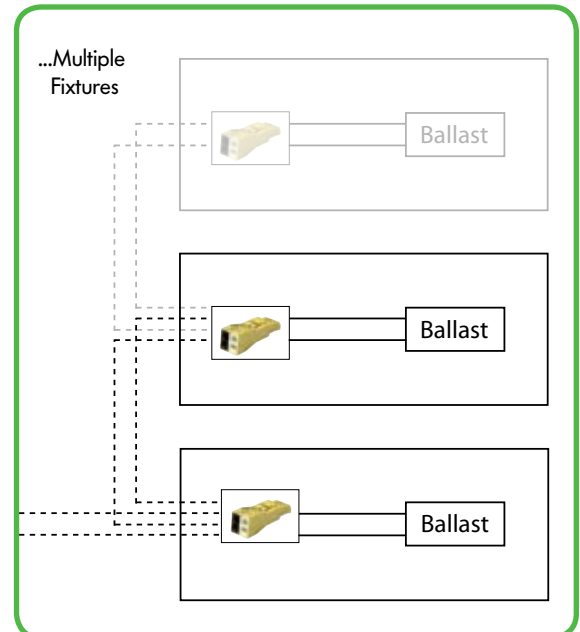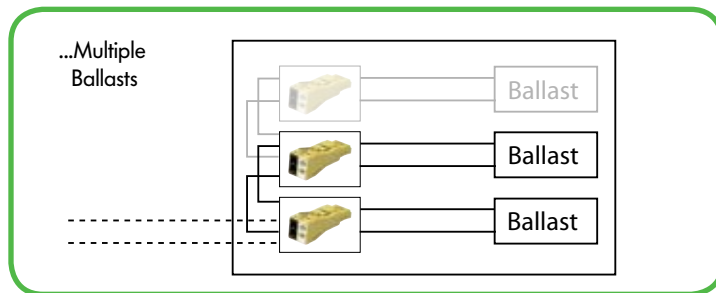

Additional Specifications

Meets: 2008 NEC 410.130(G) and CEC 30-308(4) for non-residential fluorescent luminaires
 UL2459 listed insulated multi-pole splicing connector (luminaire disconnect)
 CSA 22.2 No. 2459 certified insulated multi-pole splicing connector (luminaire disconnect)
 EN/IEC 60998 and EN/IEC61984 certified connector
 Max operating temperature: 105°C
 Flammability rating: UL94V-0



WAGO Service Worldwide

Germany

WAGO Kontakttechnik
Minden
Tel. ++0571/887-443
Fax ++0571/887-541

Austria

WAGO Kontakttechnik
GmbH Wien
Tel. ++43/1/615 07 80
Fax ++43/1/615 07 75

Belgium

WAGO Kontakttechnik
Zaventem
Tel. ++32/2/7 17 90 90
Fax ++32/2/7 17 90 99

China

WAGO ELECTRONIC Co. Ltd.
Tianjin
Tel.
++86/22/82125854/64/74
Fax ++86/22/82125984

England

WAGO, Ltd.
Rugby
Tel. ++44/1788/568008
Fax ++44/1788/568050

France

WAGO CONTACT SA.
Paris
Tel. ++33/148172590
Fax ++33/148632520

Italy

WAGO ELETTRONICA SRL
San Lazzaro di Savena (BO)
Tel. ++39/051/625-91-25
Fax ++39/051/625-91-27

Japan

WAGO Co. of JAPAN Ltd.
Tokyo
Tel. ++81/3/3254/8881
Fax ++81/3/3254/8885

Poland

WAGO ELWAG sp. z o. o.
Wroclaw
Tel. ++48/71/33-66-626
Fax ++48/71/33-60-952

Singapore

WAGO Electronic Pte. Ltd.
Singapur
Tel. ++65/2866776
Fax ++65/2842425

Switzerland

WAGO CONTACT SA
Domdidier
Tel. ++65/2866776
Fax ++65/2842425

Mexico

WAGO Corporation
Tel. 001-800-309-5975
+ 52-(55)-26-44-69-16
Fax + 52-(55)-26-44-69-15

Canada

WAGO Corporation
Tel. 800 / DIN Rail (346-7245)
Fax 262 / 255-3232

WAGO Corporation
N120 W19129 Freistadt Road
Germantown, Wisconsin 53022
Telephone: 800 / DIN Rail (346-7245)
Fax: 262 / 255-3232
info.us@wago.com
www.wago.us

