

Product description

M9 Female panel mount connector, Contacts: 8, unshielded, solder, IP40


Area Part no. series 711 09 0482 00 08


### Illustration

Scale drawing

Contact arrangement (Plug-in side)







You can find the component part drawing and assembly instructions on the next page.

#### **Technical data**

#### **General features**

Part no.	09 0482 00 08
Connector design	Female panel mount connector
Version	Connector socket straight
Connector locking system	screw
Termination	solder
Degree of protection	IP40
Cross-sectional area	0.14 mm² / AWG 26
Temperature range from/to	-40 °C / 85 °C
Mechanical operation	> 500 Mating cycles
Weight (g)	2.99
Customs tariff number	85369010
Country of Origin	DE

#### **Electrical parameters**

Rated voltage	125 V
Rated impulse voltage	1500 V
Rated current	1.0 A
Insulation resistance	≥ 10 <sup>10</sup> Ω
Pollution degree	1
Overvoltage category	II
Insulating material group	III
EMC compliance	unshielded



Product description

M9 Female panel mount connector, Contacts: 8, unshielded, solder, IP40

Area Part no. series 711 09 0482 00 08


#### Material

Contact body material	PA (UL94 V-0)
Contact material	CuSn (bronze)
Contact plating	Au (gold)
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	16ed6828-7f1a-473e-952a-557cdb01fca1

#### Classifications

eCl@ss 11.1 ETIM 9.0 27-44-01-09 EC003569

### Assembly instructions / Panel cut-out






Product description

M9 Female panel mount connector, Contacts: 8, unshielded, solder, IP40

Area Part no. series 711 09 0482 00 08

### **Component part drawing**

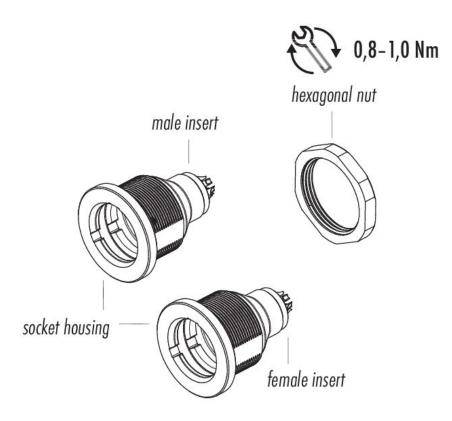



Product description

M9 Female panel mount connector, Contacts: 8, unshielded, solder, IP40

Area Part no. series 711 09 0482 00 08

#### **Security notices**

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

The plug connector is not suitable for mains voltages Please observe the pollution degree and the overvoltage category. For further information, please refer to the download center "Technical Information".