


MiniMELF case especially for automatic insertion. The Zener voltages are graded according to the international E24 standard. Smaller voltage tolerances and higher Zener voltages are upon request.

LL-34

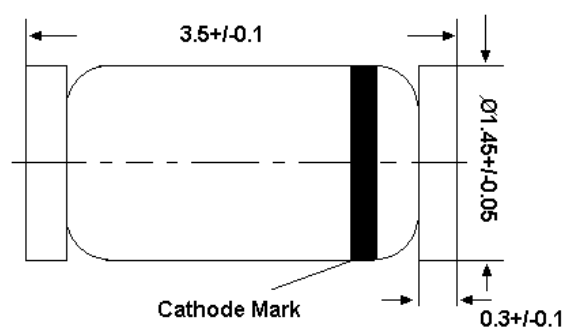

Glass case MiniMELF
Dimensions in mm

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Power Dissipation	P_{tot}	500 ¹⁾	mW
Junction Temperature	T_j	175	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 175	$^\circ\text{C}$

¹⁾ Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Max.	Unit
Forward Voltage at $I_F = 100 \text{ mA}$	V_F	1	V

¹⁾ Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case

ZMM-M

Characteristics at $T_a = 25^\circ\text{C}$

Type	Zener Voltage Range ¹⁾			Maximum Dynamic Resistance				Maximum Reverse Current	
	V_{znom}	V_{ZT}	at I_{ZT}	Z_{ZT}	at I_{ZT}	Z_{ZK}	at I_{ZK}	I_R	at V_R
	V	V	mA	Ω	mA	Ω	mA	μA	V
ZMM2V0	2.0	1.8...2.15	5	85	5	600	1	100	1
ZMM2V2	2.2	2.08...2.33	5	85	5	600	1	75	1
ZMM2V4	2.4	2.28...2.56	5	85	5	600	1	50	1
ZMM2V7	2.7	2.5...2.9	5	85	5	600	1	10	1
ZMM3V0	3.0	2.8...3.2	5	85	5	600	1	4	1
ZMM3V3	3.3	3.1...3.5	5	85	5	600	1	2	1
ZMM3V6	3.6	3.4...3.8	5	85	5	600	1	2	1
ZMM3V9	3.9	3.7...4.1	5	85	5	600	1	2	1
ZMM4V3	4.3	4...4.6	5	75	5	600	1	1	1
ZMM4V7	4.7	4.4...5	5	60	5	600	1	0.5	1
ZMM5V1	5.1	4.8...5.4	5	35	5	550	1	0.1	1
ZMM5V6	5.6	5.2...6	5	25	5	450	1	0.1	1
ZMM6V2	6.2	5.8...6.6	5	10	5	200	1	0.1	2
ZMM6V8	6.8	6.4...7.2	5	8	5	150	1	0.1	3
ZMM7V5	7.5	7...7.9	5	7	5	50	1	0.1	5
ZMM8V2	8.2	7.7...8.7	5	7	5	50	1	0.1	6.2
ZMM9V1	9.1	8.5...9.6	5	10	5	50	1	0.1	6.8
ZMM10	10	9.4...10.6	5	15	5	70	1	0.1	7.5
ZMM11	11	10.4...11.6	5	20	5	70	1	0.1	8.2
ZMM12	12	11.4...12.7	5	20	5	90	1	0.1	9.1
ZMM13	13	12.4...14.1	5	26	5	110	1	0.1	10
ZMM15	15	13.8...15.6	5	30	5	110	1	0.1	11
ZMM16	16	15.3...17.1	5	40	5	170	1	0.1	12
ZMM18	18	16.8...19.1	5	50	5	170	1	0.1	13
ZMM20	20	18.8...21.2	5	55	5	220	1	0.1	15
ZMM22	22	20.8...23.3	5	55	5	220	1	0.1	16
ZMM24	24	22.8...25.6	5	80	5	220	1	0.1	18
ZMM27	27	25.1...28.9	5	80	5	220	1	0.1	20
ZMM30	30	28...32	5	80	5	220	1	0.1	22
ZMM33	33	31...35	5	80	5	220	1	0.1	24
ZMM36	36	34...38	5	80	5	220	1	0.1	27
ZMM39	39	37...41	2.5	90	2.5	500	0.5	0.1	30
ZMM43	43	40...46	2.5	90	2.5	500	0.5	0.1	33
ZMM47	47	44...50	2.5	110	2.5	600	0.5	0.1	36

¹⁾ Tested with pulses $t_p = 20 \text{ ms}$.