



MYD-Y6ULX-V2 Development Board Overview



- ✓ MYC-Y6ULX-V2 CPU Module as Controller Board
- ✓ 528Hz NXP i.MX 6UL/6ULL ARM Cortex-A7 Processors
- ✓ 1.0mm pitch 140-pin Stamp Hole Expansion Interface for Board-to-Board Connections
- ✓ 256MB DDR3 SDRAM, 256MB Nand Flash or 4GB eMMC Flash
- ✓ 2 x USB2.0 Host, 1 x USB2.0 OTG, 2 x 10/100 Mbps Ethernet, CAN, RS485, TF, LCD, Camera, Audio ...
- ✓ Onboard SDIO based WiFi Module with External Antennas
- ✓ Mini-PCIe Slot for Optional USB based 4G LTE Module
- ✓ Optional 4.3- or 7-inch LCD/TSP and Camera Module
- ✓ Ready-to-Run Linux 5.4.3



The **MYD-Y6ULX-V2 development board** is a complete evaluation platform for NXP’s **i.MX 6UltraLite / 6ULL** processor family, which can operate at 528 MHz and features the most efficient **ARM Cortex-A7** core, providing various memory interfaces and enhancing the flexibility and convenience of the board to connect peripheral devices. The board is ready to run Linux and supports industrial operating temperature range from -40 to +85 Celsius.

The **MYD-Y6ULX-V2 development board** employs the **MYC-Y6ULX-V2 CPU Module** as the controller board by populating the CPU Module on its base board through 1.0mm pitch 140-pin stamp hole interface. The MYC-Y6ULX-V2 CPU Module is mounted with a shield cover and integrated with core components including i.MX 6UltraLite / 6ULL processor, 256MB DDR3, 256MB Nand Flash or optional 4GB eMMC and Ethernet PHY. The base board has extended rich peripherals through connectors and headers like Serial ports, USB, Ethernet, CAN, Micro SD card, WiFi module, LCD/Touch screen, Camera, Audio as well as an optional Mini PCIe interface for USB based 4G LTE module. It is a versatile platform and solid reference design delivered with necessary cable accessories detailed documentations ideal for prototype and evaluation based on i.MX 6UL/6ULL solutions.

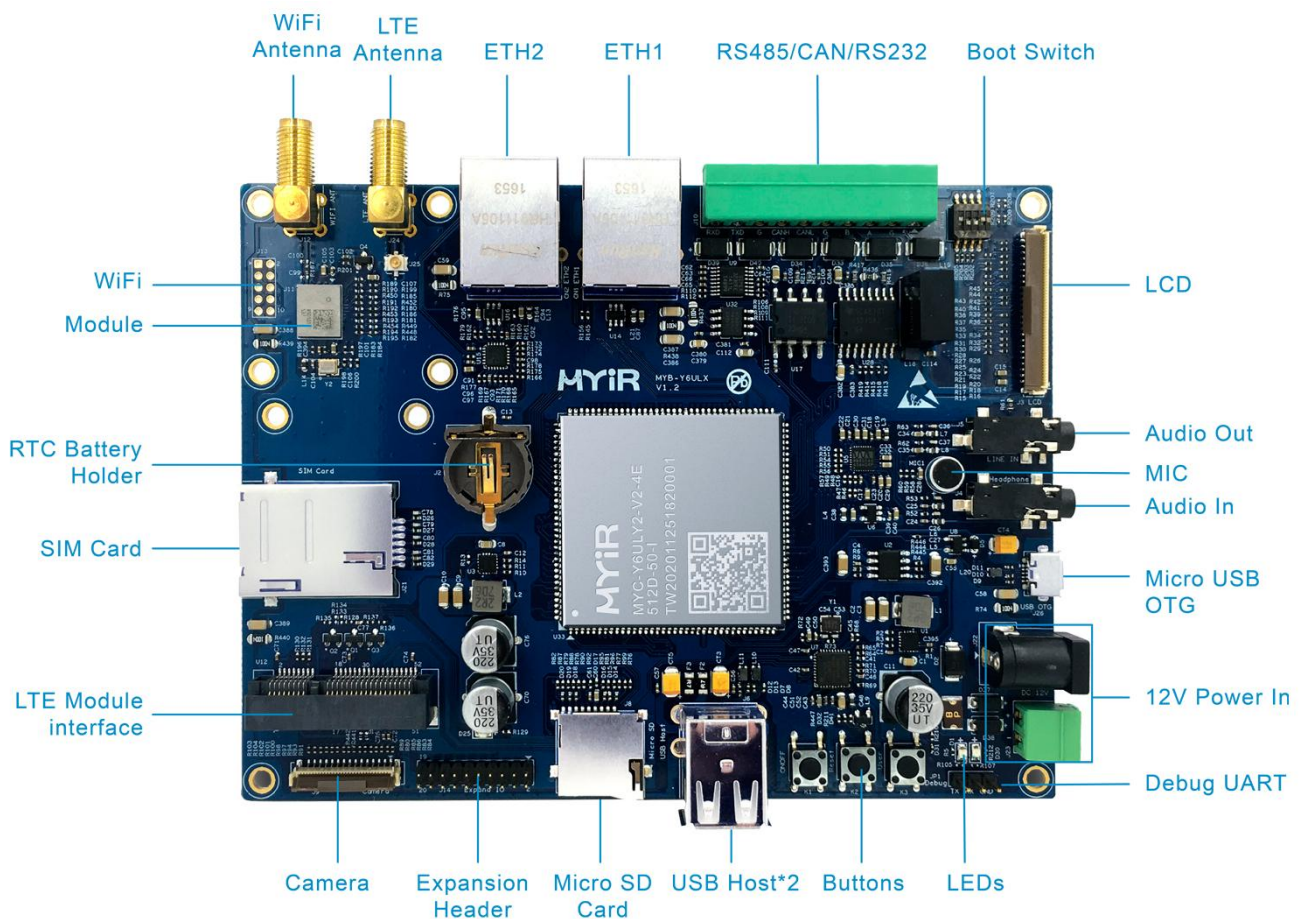


Figure 1-2 MYD-Y6ULX-V2 Development Board Interface Diagram

MYIR offers three models of MYD-Y6ULX-V2 development boards with mainly different features as shown in below table. User can select model according to their own requirement.



| MYD-Y6ULX-V2 | MYD-Y6ULG2-V2-256N256D-50-I | MYD-Y6ULY2-V2-256N256D-50-C/I | MYD-Y6ULY2-V2-4E512D-50-C/I |
|---------------|---|--|--|
| MYC-Y6ULX-V2 | MYC-Y6ULG2-V2-256N256D-50-I | MYC-Y6ULY2-V2-256N256D-50-C/I | MYC-Y6ULY2-V2-4E512D-50-C/I |
| Processor | MCIMX6G2CVM05AB | MCIMX6Y2DVM05AA | MCIMX6Y2DVM05AA |
| RAM | 256MB DDR3 | 256MB DDR3 | 512MB DDR3 |
| Flash | 256MB Nand Flash | 256MB Nand Flash | 4GB eMMC |
| WiFi | Support | Support | Cannot support Reuse SDIO with eMMC |
| Working Temp. | -40 to +85 Celsius (-I) | 0 to +70 Celsius (-C) / -40 to +85 Celsius (-I) | 0 to +70 Celsius (-C) / -40 to +85 Celsius (-I) |
| | WiFi Module can only support -20 to +65 Celsius. | | |

Five Models of MYD-6ULX-V2 (standard configurations)

Hardware Specification

The **MYC-Y6ULX-V2 CPU Module** is using the 14 x 14mm, 0.8 mm ball pitch, 289 MAPBGA package 528 MHz i.MX 6UltraLite / i.MX 6ULL ARM Cortex-A7 application processor which provides multiple compatible options of G0, G1, G2, G3, Y0, Y1 and Y2 sub family. The MCIMX6G2CVM05AB and MCIMX6Y2DVM05AA are optional as the default part with the board.

Expanding the i.MX 6 series, the i.MX 6UltraLite is a high performance, ultra-efficient processor family featuring an advanced implementation of a single ARM® Cortex®-A7 core, which operates at speeds up to 696 MHz. The i.MX 6UltraLite applications processor includes an integrated power management module that reduces the complexity of external power supply and simplifies power sequencing. Each processor in this family provides various memory interfaces, including 16-bit LPDDR2, DDR3, DDR3L, raw and managed NAND flash, NOR flash, eMMC, Quad SPI and a wide range of other interfaces for connecting peripherals such as WLAN, Bluetooth™, GPS, displays and camera sensors.



| Feature | MCIMX6G0 | MCIMX6G1 | MCIMX6G2 | MCIMX6G3 |
|---------------------|-------------------------------|---|---|---|
| Speed | 528 MHz | 528 MHz, 696 MHz | 528 MHz, 696 MHz | 528 MHz |
| Cache | 32 KB-I, 32 KB-D | 32 KB-I, 32 KB-D 128 KB L2 | 32 KB-I, 32 KB-D 128 KB L2 | 32 KB-I, 32 KB-D 128 KB L2 |
| OCRAM | 128 KB | 128 KB | 128 KB | 128 KB |
| DRAM | 16-bit LP-DDR2, DDR3/DDR3L | 16-bit LP-DDR2, DDR3/DDR4L | 16-bit LP-DDR2, DDR3/DDR5L | 16-bit LP-DDR2, DDR3/DDR6L |
| eFuse | 512-bit | 1024-bit | 1536-bit | 2048-bit |
| NAND (BCH40) | Yes | Yes | Yes | Yes |
| EBI | Yes | Yes | Yes | Yes |
| Ethernet | 10/100-Mbit/s x 1 | 10/100-Mbit/s x 1 | 10/100-Mbit/s x 2 | 10/100-Mbit/s x 2 |
| USB | OTG, HS/FS x 1 | OTG, HS/FS x 2 | OTG, HS/FS x 2 | OTG, HS/FS x 2 |
| CAN | 0 | 1 | 2 | 2 |
| Security | Basic | TRNG, Crypto Engine (AES/TDES/SHA), Secure Boot | TRNG, Crypto Engine (AES/TDES/SHA), Secure Boot | TRNG, Crypto Engine (AES with DPA/TDES/SHA/RSA), Secure Boot, tamper monitor, PCI4.0 pre-certification, OTF DRAM encryption |
| Graphic | None | None | PxP | PxP |
| CSI | None | None | 24-bit Parallel CSI | 24-bit Parallel CSI |
| LCD | None | None | 24-bit Parallel LCD | 24-bit Parallel LCD |
| Quad SPI | 1 | 1 | 1 | 1 |
| SDIO | 2 | 2 | 2 | 2 |
| UART | 4 | 8 | 8 | 8 |
| I2C | 2 | 4 | 4 | 4 |
| SPI | 2 | 4 | 4 | 4 |
| I2S/SAI | 1 | 3 | 3 | 3 |
| S/PDIF | 1 | 1 | 1 | 1 |
| Timer/PWM | Timer x 2, PWM x 4 | Timer x 4, PWM x 8 | Timer x 4, PWM x 8 | Timer x 4, PWM x 8 |
| 12-bit ADC | 1 x 10-ch. | 1 x 10-ch. | 2 x 10-ch. | 2 x 10-ch. |

i.MX 6UltraLite Device Options

The i.MX 6ULL is a power efficient and cost optimized applications processor family featuring an advanced implementation of a single ARM Cortex-A7 core, which operates at speeds up to 900 MHz. The i.MX 6ULL applications processor includes an integrated power management module that reduces the complexity of an external power supply and simplifies power sequencing. Each processor in this family provides various memory interfaces, including 16-bit LPDDR2, DDR3, DDR3L, raw and managed NAND flash, NOR flash, eMMC, Quad SPI and a wide range of other interfaces for connecting peripherals such as WLAN, Bluetooth®, GPS, displays and camera sensors.



| Feature | MCIMX6Y0 | MCIMX6Y1 | MCIMX6Y2 |
|---------------------|-------------------------------|-------------------------------|-------------------------------|
| Core | ARM® Cortex-A7 | ARM® Cortex-A7 | ARM® Cortex-A7 |
| Speed | 528 MHz | 528 MHz | 528 MHz |
| Cache | 32 KB-I, 32 KB-D | 32 KB-I, 32 KB-D 128 KB L2 | 32 KB-I, 32 KB-D 128 KB L2 |
| OCRAM | 128 KB | 128 KB | 128 KB |
| DRAM | 16-bit LP-DDR2, DDR3/DDR3L | 16-bit LP-DDR2, DDR3/DDR4L | 16-bit LP-DDR2, DDR3/DDR5L |
| eFuse | 256-bit | 256-bit | 256-bit |
| NAND (BCH40) | Yes | Yes | Yes |
| EBI | Yes | Yes | Yes |
| Ethernet | 10/100-Mbit/s x 1 | 10/100-Mbit/s x 1 | 10/100-Mbit/s x 2 |
| USB | OTG, HS/FS x 1 | OTG, HS/FS x 2 | OTG, HS/FS x 2 |
| CAN | 0 | 1 | 2 |
| Graphic | None | None | PxP |
| CSI | None | None | 16-bit Parallel CSI |
| LCD | None | None | 24-bit Parallel LCD |
| Quad SPI | 1 | 1 | 1 |
| SDIO | 2 | 2 | 2 |
| UART | 4 | 8 | 8 |
| I2C | 2 | 4 | 4 |
| SPI | 2 | 4 | 4 |
| I2S/SAI | 1 | 3 | 3 |
| ESAI | 1 | 1 | 1 |
| S/PDIF | 1 | 1 | 1 |
| Timer/PWM | Timer x 2, PWM x 4 | Timer x 4, PWM x 8 | Timer x 4, PWM x 8 |
| 12-bit ADC | 1 x 10-ch. | 1 x 10-ch. | 2 x 10-ch. |
| Security | None | AES-128, HAB | AES-128, HAB |
| Temperature | -40°C to 105°C (Tj) | -40°C to 105°C (Tj) | 0°C to 90°C (Tj) |


i.MX 6ULL Device Options

Mechanical Parameters

- Dimensions: 105mm x 140mm (base board), 37mm x 39mm (CPU Module)
- PCB Layers: 4-layer design (base board), 10-layer design (CPU Module)
- Power supply: +12V/1.5A (base board), +3.3V/0.3A (CPU Module)
- Working temperature: 0~70 Celsius (commercial grade) or -40~85 Celsius (industrial grade)



The MYD-Y6ULX-V2 Controller Board ([MYC-Y6ULX-V2 CPU Module](#))

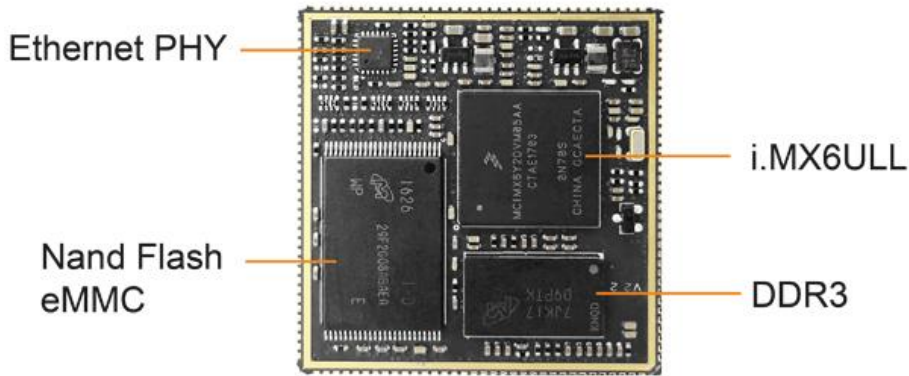

[MYC-Y6ULX-V2 CPU Module](#) (delivered with shielding cover by default)

Processor

- 528MHz NXP i.MX 6UltraLite / i.MX 6ULL ARM Cortex-A7 processor (MCIMX6G2CVM05A or MCIMX6Y2DVM05A by default)

Memory

- 256MB DDR3 SDRAM (supports up to 1GB)
- 256MB Nand Flash (4GB eMMC Flash is optional)


Peripherals and Signals Routed to Pins

- One 10/100M Ethernet PHY
- 1.0mm pitch 140-pin stamp hole expansion interface
 - 2 x 10/100Mbps Ethernet
 - 8 x Serial ports
 - 4 x I2C
 - 2 x CAN
 - 4 x SPI
 - 8 x ADC
 - 8 x PWM
 - 3 x I2S
 - 1 x Parallel Camera Sensor Interface
 - 1 x JTAG
 - 1 x 24-bit LCD interface
 - Up to 97 x GPIOs

Note: the peripheral signals brought out to the expansion interface are listed in maximum number. Some signals are reused. Please refer to the processor datasheet.



The MYD-Y6ULX-V2 Base Board

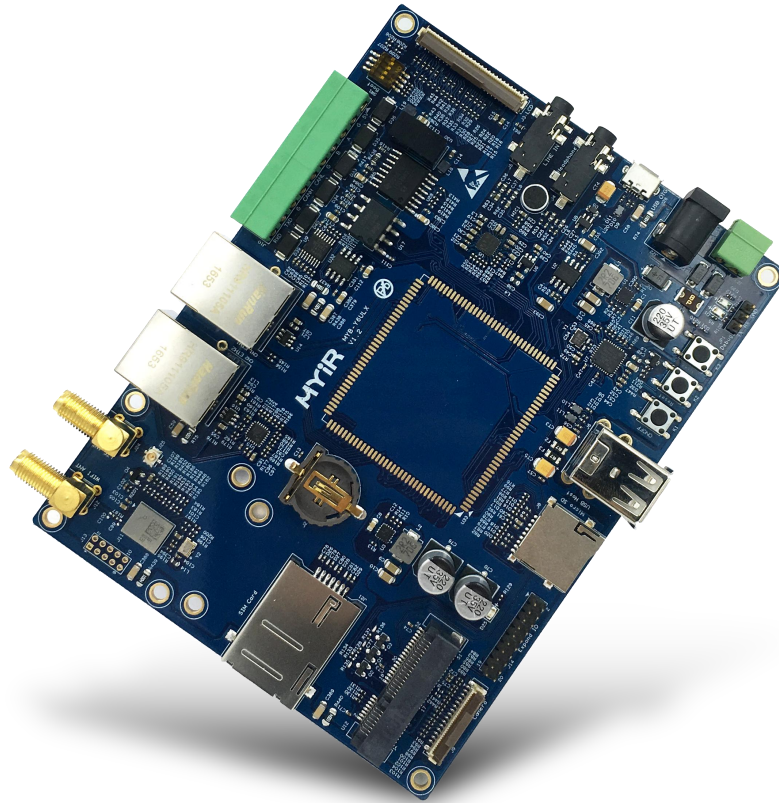


MYD-Y6ULX-V2 Base Board


- Serial ports
 - 1 x Debug serial port (TTL)
 - 1 x RS485 serial port (with isolation)
 - 1 x 3-wire RS232 serial port (with isolation)
- USB
 - 2 x USB2.0 Host ports
 - 1 x Micro USB2.0 OTG ports
- 1 x Mini PCIe interface (for optional USB based 4G LTE module)
- 1 x SIM card socket
- 1 x SDIO based WiFi module
- 2 x External antenna interfaces (one for WiFi module and one for 4G LTE module)
- 2 x 10/100 Mbps Ethernet interfaces
- 1 x Camera interface
- 1 x CAN interface (with isolation)
- 1 x Micro SD card slot
- 1 x LCD interface (16-bit true color, supports optional 4.3-inch and 7-inch TFT LCD)
- Battery backed RTC
- Audio input/output port (3.5mm jack)
- 3 x Buttons (1 x Reset button, 1 x User button, 1 x ON/OFF button)
- 2 x LEDs (1 x power indicator LED, 1 x user-defined LED)
- 1 x 2.0mm 20-pin male expansion connector
 - 1 x SPI
 - 1 x I2C
 - 2 x UART
 - 10 x GPIO



Function Block Diagram

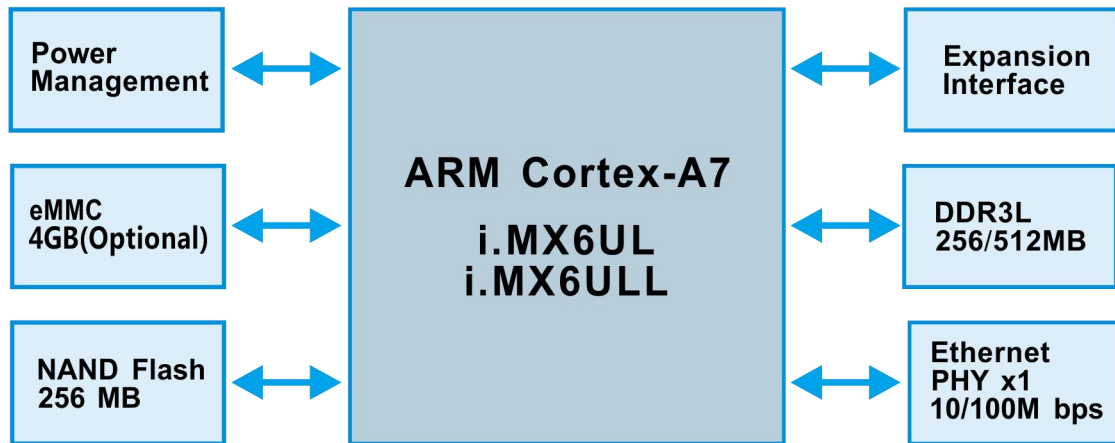


MYC-Y6ULX-V2 Function Block Diagram

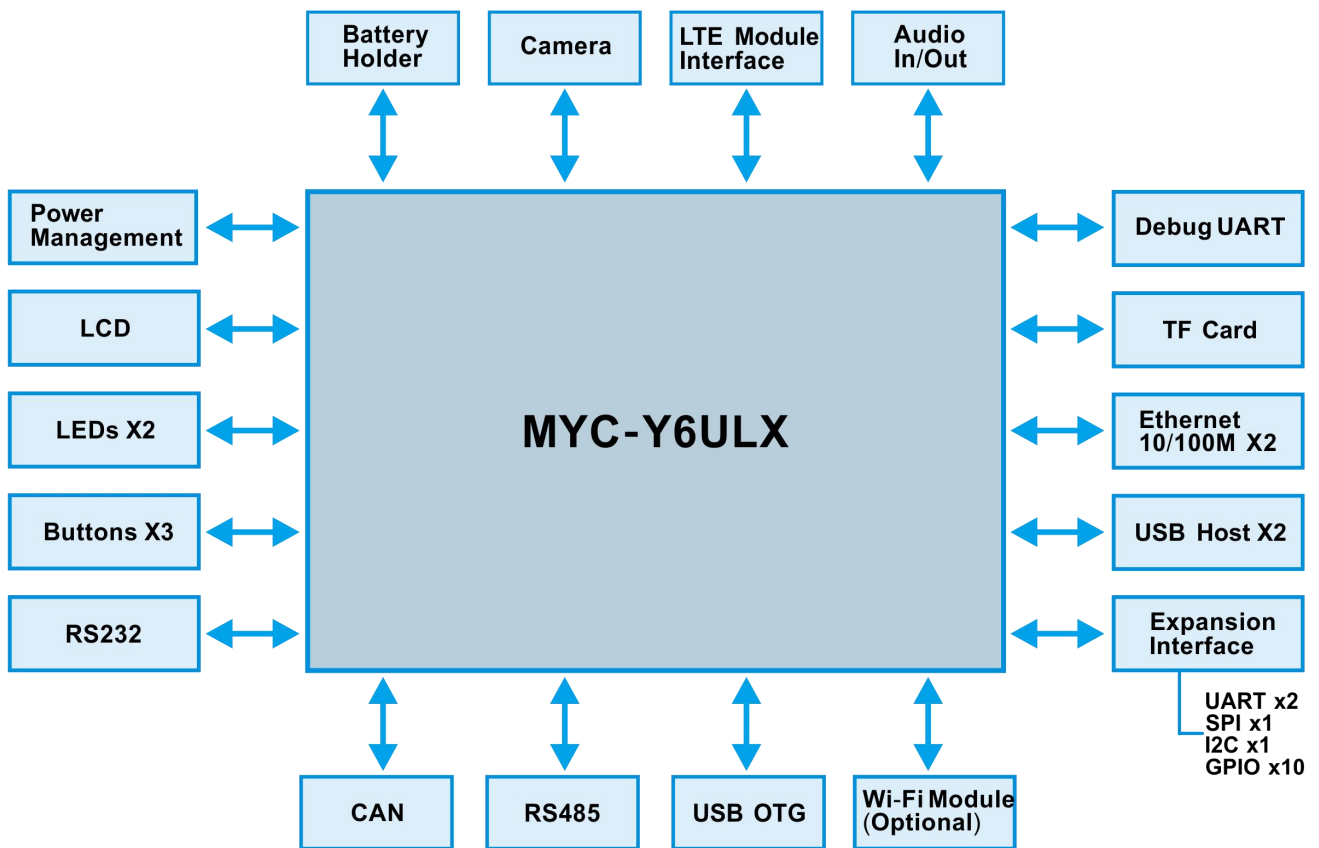

MYD-Y6ULX-V2 Function Block Diagram



Dimension Chart of MYD-Y6ULX-V2

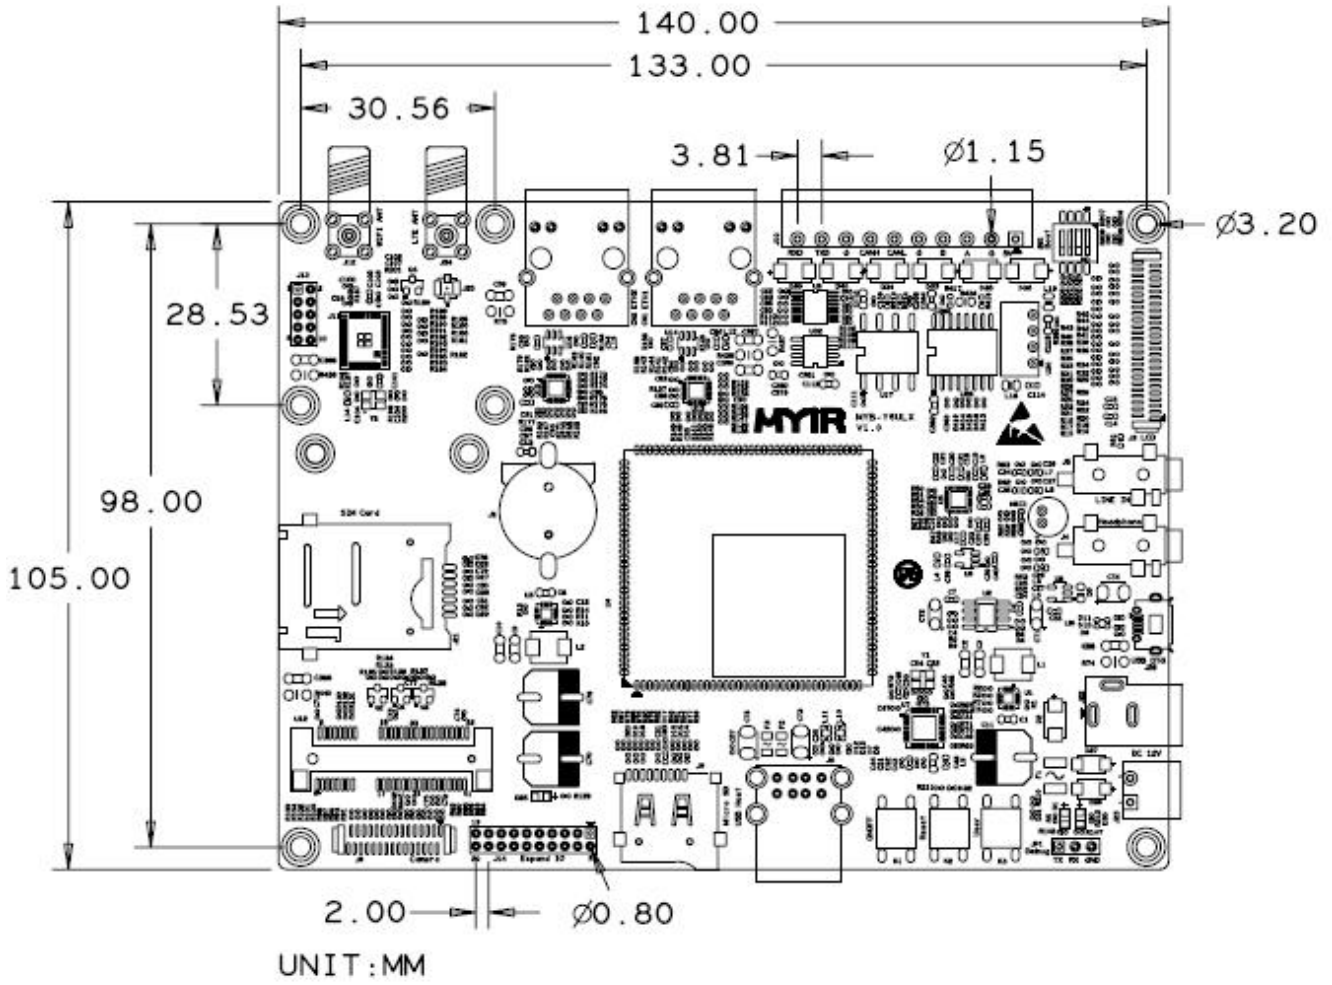

Dimension Chart of MYD-Y6ULX-V2



Software Features

The MYD-Y6ULX-V2 development board supports running Linux Operating System and is provided with software packages. Software features are summarized as below:

| Item | Features | Description |
|---------------------|--------------------------|--|
| Bootstrap program | U-boot-2020 | The primary bootstrap (source code) |
| Kernel | Version | Linux 5.4.3 (source code) |
| Linux Drivers | USB | HOST and OTG driver (source code) |
| | Ethernet | Ethernet driver (source code) |
| | MMC | MMC/eMMC/TF card driver (source code) |
| | NandFlash | Nand Flash driver (source code) |
| | eMMC | eMMC driver (source code) |
| | WiFi | WiFi Module driver (SDIO signal, source code) |
| | 4G LTE | 4G LTE Module driver (USB signal, source code) |
| | Camera | Camera driver (source code, supports MYIR's MY-CAM011B) |
| | LCD Controller | LCD driver (source code, supports MYIR's 4.3- and 7- inch LCD) |
| | Touch Panel | Resistive and Capacitive touch screen driver (source code) |
| | RTC | RTC driver (source code) |
| | GPIO Button | Button driver (source code) |
| | GPIO LED | LED driver (source code) |
| | GPIO KEY | KEY driver (source code) |
| | UART | UART driver (source code) |
| | CAN | CAN driver (source code) |
| | RS485 | RS485 driver (source code) |
| | Audio | Audio (wm8904) driver (source code) |
| | UART | UART driver (source code) |
| | SPI | SPI driver (source code) |
| I2C | I2C driver (source code) | |
| File System | Yocto | Yocto3.0, including QT5.13 (source code) |
| Compiler Tool Chain | Linaro GCC 4.9 hf | Binary file |
| | MetaToolchain | Built by Yocto, GCC 5.3 (Binary file) |
| | Applications Tool Chain | Built by Yocto, GCC 5.3 (Binary file) |

Software Features of MYD-Y6ULX-V2



Order Information

| Product Item | Part No. | Packing List |
|-----------------------------------|-----------------------------|---|
| MYD-Y6ULX-V2 Development Board | MYD-Y6ULG2-V2-256N256D-50-I | <ul style="list-style-type: none"> ✓ One MYD-Y6ULX-V2 Board ✓ One 12V/1.5A Power adapter ✓ One USB cable ✓ One Ethernet cable ✓ One 4G LTE antenna ✓ One WiFi antenna (MYD-Y6ULY2-4E512D-50-C/I has none.) |
| | MYD-Y6ULY2-V2-256N256D-50-C | |
| | MYD-Y6ULY2-V2-256N256D-50-I | |
| | MYD-Y6ULY2-V2-4E512D-50-C | |
| | MYD-Y6ULY2-V2-4E512D-50-I | |
| MYC-Y6ULX-V2 CPU Module | MYC-Y6ULG2-V2-256N256D-50-I | <ul style="list-style-type: none"> ✓ One MYC-Y6ULX-V2 CPU Module |
| | MYC-Y6ULY2-V2-256N256D-50-C | |
| | MYC-Y6ULY2-V2-256N256D-50-I | |
| | MYC-Y6ULY2-V2-4E512D-50-C | |
| | MYC-Y6ULY2-V2-4E512D-50-I | |
| MY-LCD43TP LCD Module | MY-TFT043RV2 | Add-on Options <ul style="list-style-type: none"> ✓ MYC-Y6ULX-V2 CPU Module ✓ MY-LCD43TP 4.3-inch LCD Module ✓ MY-LCD70TP 7-inch LCD Module ✓ MY-LCD70TP-C 7-inch LCD Module ✓ MY-CAM002U Camera Module ✓ MY-CAM011B Camera Module |
| MY-LCD70TP LCD Module | MY-TFT070RV2 | |
| MY-LCD70TP-C LCD Module | MY-TFT070CV2 | |
| MY-CAM002U Camera Module | MY-CAM002U | |
| MY-CAM011B Camera Module | MY-CAM011B | |
| | | |



MYiR Tech Limited

Headquarter Address: Room 04, 6th Floor, Building No.2, Fada Road, Yunli Smart Park, Bantian, Longgang District, Shenzhen, Guangdong, China 518129

Factory Address: Room 201, Block C, Shengjianli Industrial Park, Dafu Industrial Zone, Guanlan, Longhua District, Shenzhen, 518110, China

Website: www.myirtech.com

Email: sales@myirtech.com

Tel: +86-755-22984836