
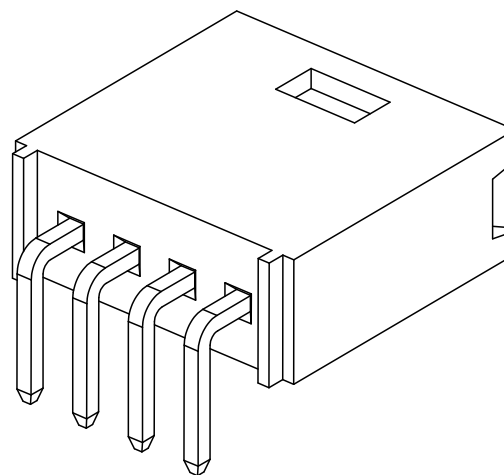


	REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.14	阿树


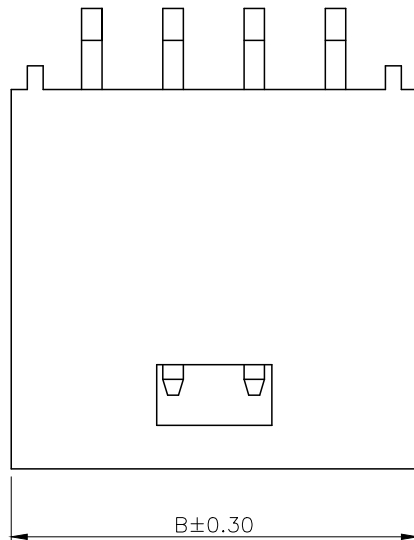


- SPECIFICATIONS
- Voltage rating: 250V AC/DC
- Current rating: 3A AC/DC
- Withstanding Voltage: 800V AC/minute
- Temperature range: -40°C ~ +125°C
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Contact resistance: $\leq 10\text{m}\Omega$
- After environmental testing: $\leq 20\text{m}\Omega$

PART NO.:


X2530 W R-XX-PT SN
① ② ③ ④ ⑤ ⑥

①Series No
②Category:W-Wafer
③Welding Board Angle:R-Stright 90°
④Row No.Pin No:XX-02~20Pin
⑤Material: PT-PBT UL94V-0
⑥Planting:SN-Bright Tin Plated

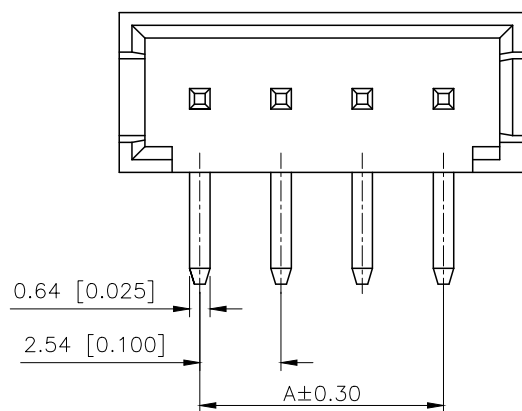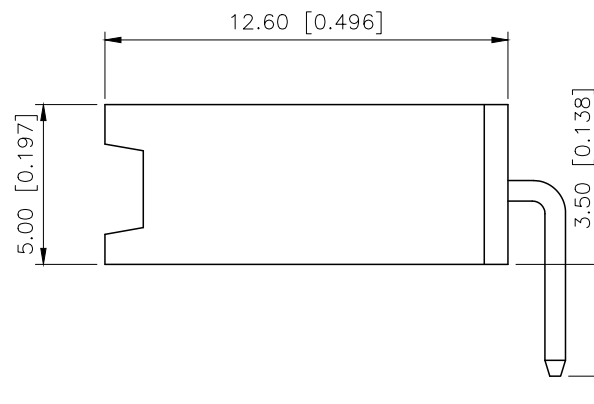

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2	2.54	7.70	12	27.94	32.70
3	5.08	10.20	13	30.48	35.20
4	7.62	12.70	14	33.02	37.70
5	10.16	15.20	15	35.56	40.20
6	12.70	17.70	16	38.10	42.70
7	15.24	20.20	17	40.64	45.20
8	17.78	22.70	18	43.18	47.70
9	20.32	25.20	19	45.72	50.20
10	22.86	27.70	20	48.26	52.70
11	25.40	30.20	22	53.34	57.70

X2530WR-XX-PTSN	PBT UL 94V-0	Brass	Tin-Plated	X2530T
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKE Terminal

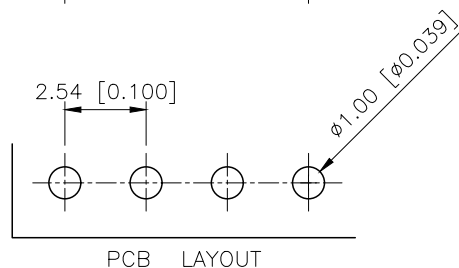

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW: 	MODEL TYPE: 2.54mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X2530WR-XX-PTSN
APPROVED		SIZE: A4	DWG NO.:

MODEL TYPE:	2.54mm Crimp Style Connector
PART NO.:	X2530WR-XX-PTSN
DWG NO.:	

SCALE	PAGE	REVISION
N/A	1/1	A1