

为您的产品保驾护航

PRODUCT DATASHEET

Electro-Static Discharge



JEN1006-5V-ULC ESD

**Features**

- Ultra small package: 1.0x0.6x0.37mm(DFN1006)
- Ultra Low Capacitance: 0.30pF(typ.)
- Reverse Working Voltage: 5V
- IEC 61000-4-2 (ESD Air): ±20KV
- IEC 61000-4-2 (ESD Contact): ±20KV
- IEC 61000-4-5 (Lightning 8/20µs): 5A

**Applications**

- Smart Phone and Tablet PC
- TV and Set Top Box
- Wearable Devices
- PDA


**Pin Description**

**Schematic Diagram**

**Limiting Values(T<sub>A</sub> = 25 °C, unless otherwise specified)**

Symbol	Parameter	Conditions	Min	Max	Unit
V <sub>ESD</sub>	Electrostatic Discharge Voltage	IEC 61000-4-2;Contact Discharge	-	±20	kV
		IEC 61000-4-2;Air Discharge	-	±20	kV
P <sub>PP</sub>	Peak Pulse Power	t <sub>p</sub> =8/20µs	-	110	W
I <sub>PPM</sub>	Rated Peak Pulse Current	t <sub>p</sub> =8/20µs	-	5.0	A
T <sub>A</sub>	Operating Temperature Range	-	-55	125	°C
T <sub>stg</sub>	Storage Temperature Range	-	-55	150	°C


**Electrical Characteristics(T<sub>A</sub> = 25 °C, unless otherwise specified)**

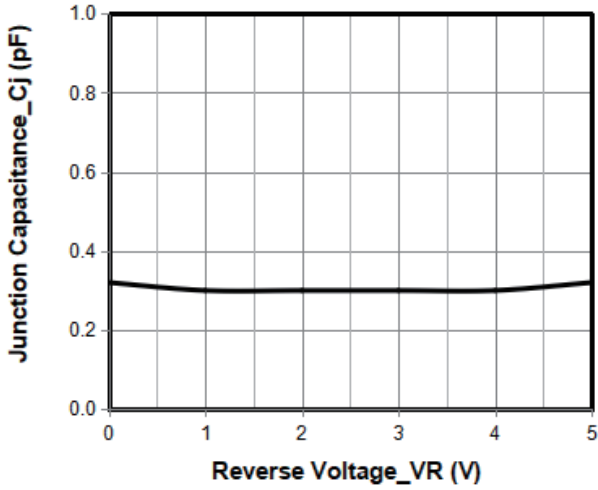Symbol	Parameter	Conditions	Min	Typ.	Max	Unit
V <sub>RWM</sub>	Reverse Working Voltage	T <sub>A</sub> =25°C	-	-	5.0	V
V <sub>BR</sub>	Breakdown Voltage	I <sub>R</sub> =1mA;T <sub>A</sub> =25°C	6.0	8.5	9.5	V
I <sub>R</sub>	Reverse Leakage Current	V <sub>RWM</sub> =5V;T <sub>A</sub> =25°C	-	-	0.1	µA
V <sub>C</sub>	Clamping Voltage	I <sub>PP</sub> =1A(8x20µs pulse)	-	-	10	V
		I <sub>PP</sub> =5.0A(8x20µs pulse)	-	-	22	V
C <sub>J</sub>	Junction Capacitance	V <sub>R</sub> =0V,f=1 MHz	-	0.30	0.40	pF


Typical Characteristics




Junction Capacitance vs. Reverse Voltage

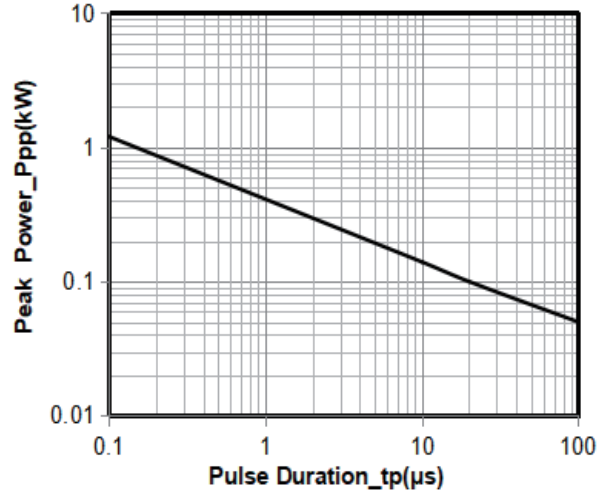


Peak Pulse Power vs. Pulse Time

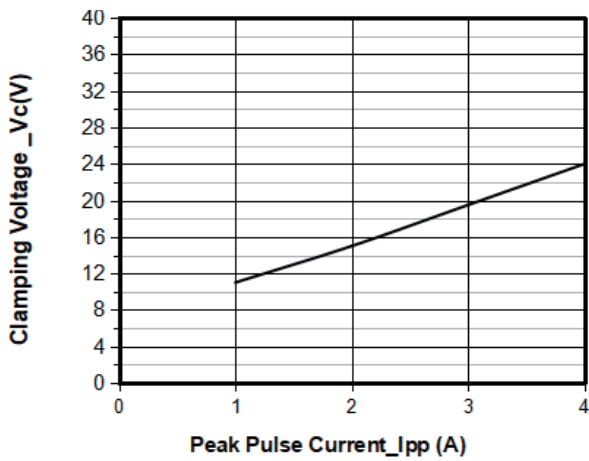


Clamping Voltage vs. Peak Pulse Current

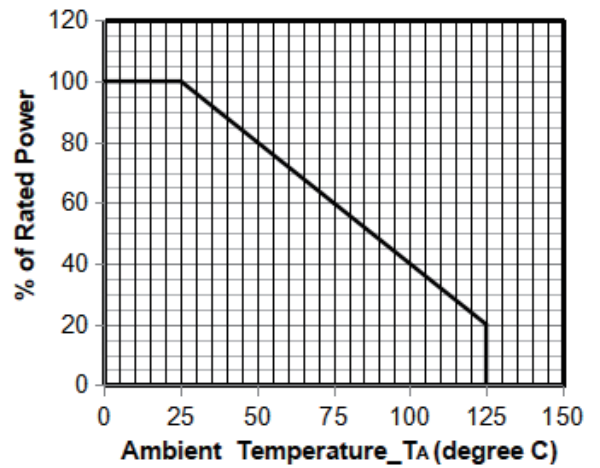


Power Derating Curve

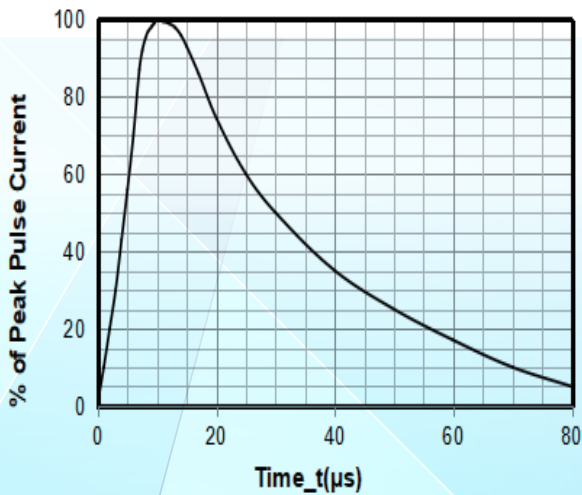


8 X 20 μs Pulse Waveform

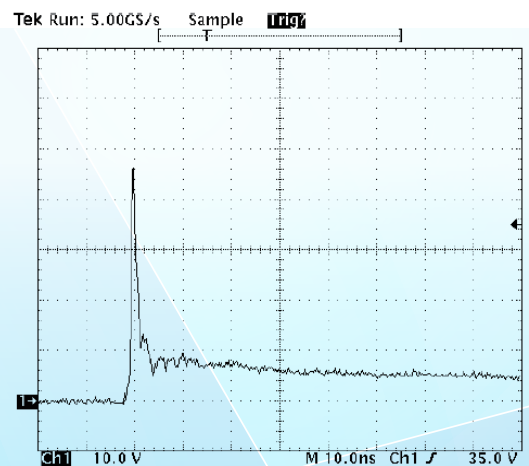

Note: Data is taken with a 10x attenuator  
ESD Clamping Voltage  
8 kV Contact per IEC61000-4-2

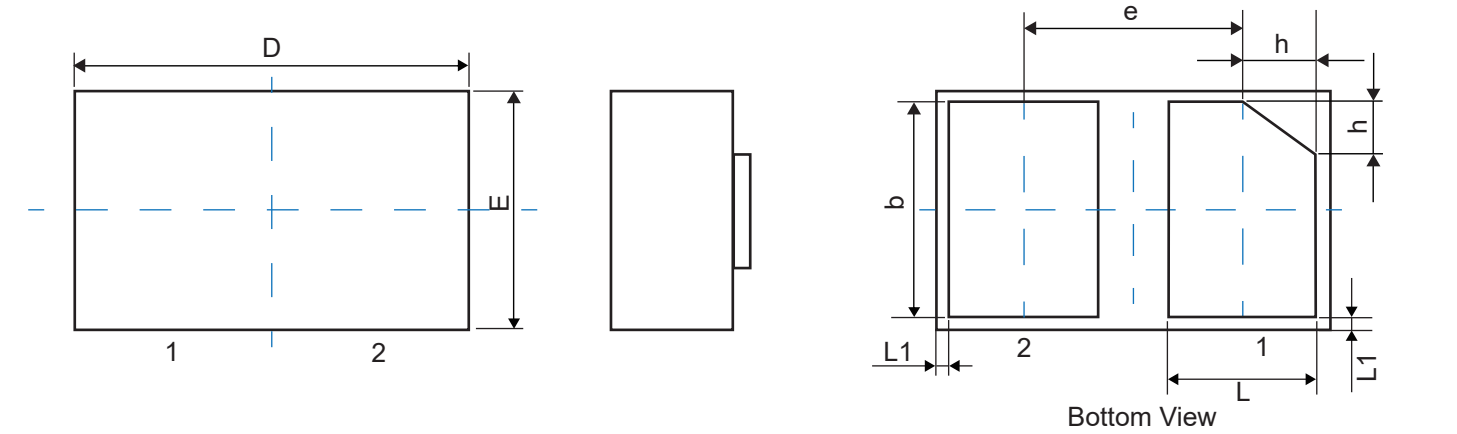**Physical Dimensions(mm.)**


Symbol	Dimensions In Millimeters			Dimensions In Inches		
	Min	Nom	Max	Min	Nom	Max
A	0.45	0.50	0.55	0.018	0.020	0.022
A1	0.00	0.02	0.05	0.000	0.001	0.002
b	0.45	0.50	0.55	0.018	0.020	0.022
c	0.12	0.15	0.18	0.005	0.006	0.007
D	0.95	1.00	1.05	0.037	0.039	0.041
e	0.65 BSC			0.026 BSC		
E	0.55	0.60	0.65	0.022	0.024	0.026
L	0.20	0.25	0.30	0.008	0.010	0.012
L1	0.05 REF			0.002 REF		
h	0.07	0.12	0.17	0.003	0.005	0.007

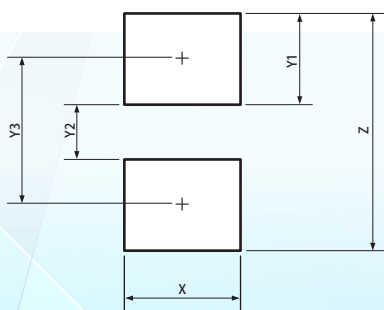
**Suggested Land Pattern**


Symbol	Dimensions	
	Millimeters	Inches
X	0.60	0.024
Y1	0.50	0.020
Y2	0.30	0.012
Y3	0.80	0.032
Z	1.30	0.052

**Packaging Quantity**

Part Number	Size(mm)	Delivery Form	Delivery Quantity
JEN1006-5V-ULC	1.00x0.60x0.37	7" T&R	10,000

### Soldering Parameters

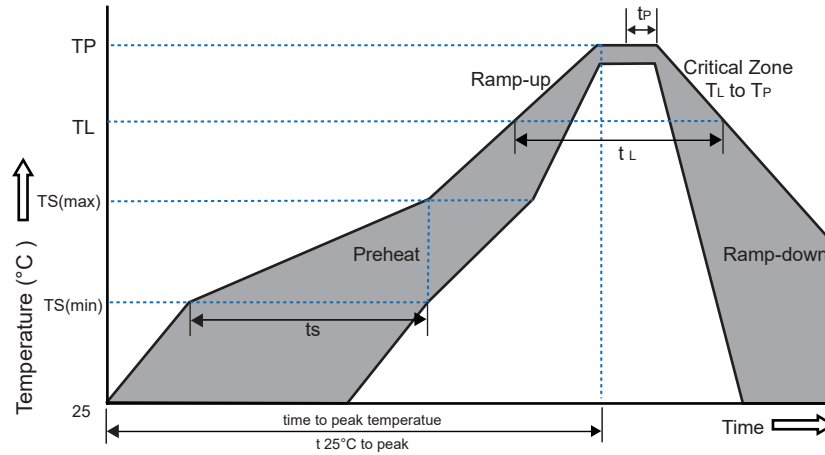

Reflow Condition		Pb-Free Assembly
Pre-heat	-Temperature Min( $T_{s(min)}$ )	+150°C
	-Temperature Max( $T_{s(max)}$ )	+200°C
	-Time(Min to Max)( $t_s$ )	60~180 secs.
Average ramp up rate (Liquid us Temp( $T_L$ ) to peak)		3°C/sec. Max
Ts(max) to $T_L$ - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature( $T_L$ )(Liquid us)	+217°C
	-Temperature ( $t_L$ )	60~150 secs.
Peak Temp ( $T_p$ )		+260(+0/-5)°C
Time within 5°C of actual Peak Temp ( $t_p$ )		30 secs. Max
Ramp-down Rate		6°C/sec. Max
xTime 25°C to Peak Temp (TP)		8 min. Max
Do not exceed		+260°C

### Part Number System

## JE N1006 - 5V - UL C

