
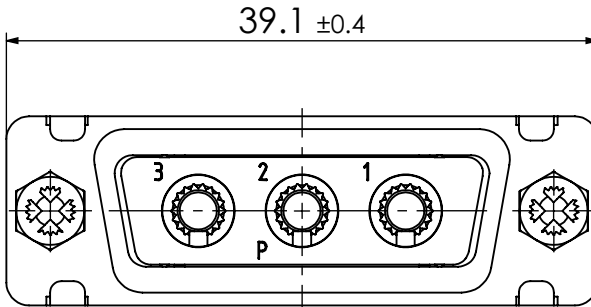
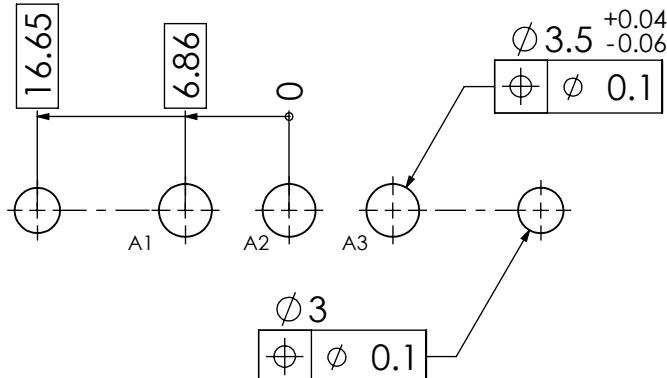
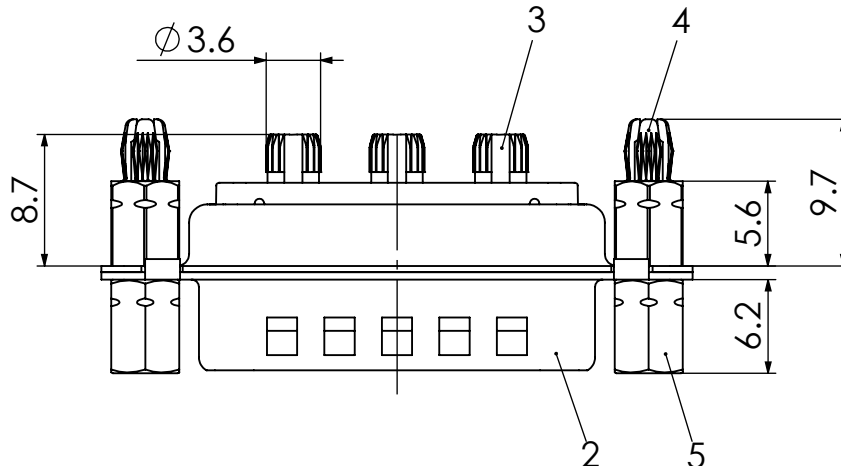
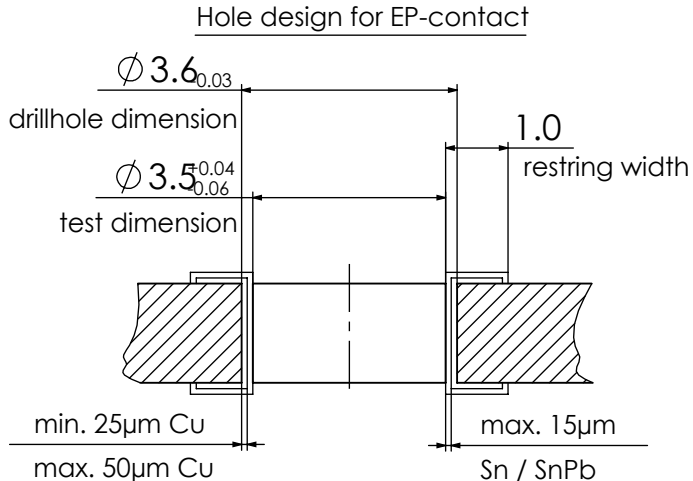
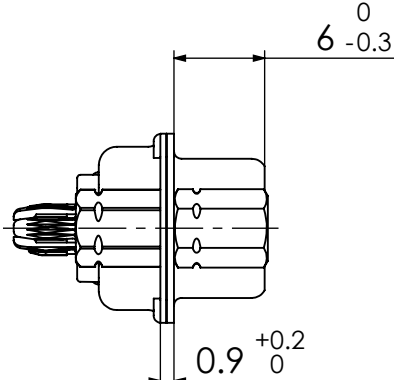


RoHS compliant by exemption

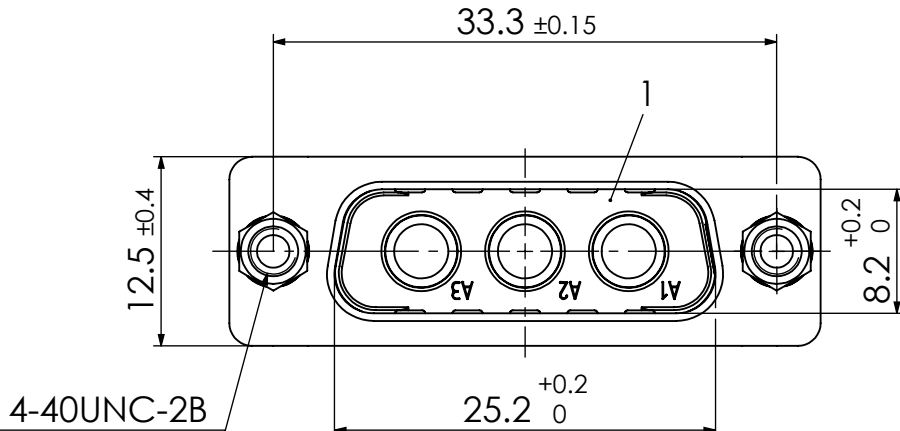

5	2	Female screw lock	F-GSCH1/5-K175 / Steel	tin plated
4	2	Snap-in bolt	PCB 2.4mm / Brass	tin plated
3	3	High power contact	FMP334P104IR	30A
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C to +130°C) acc. UL94V-0	green
<i>No.</i>	<i>St.</i>	<i>Part</i>	<i>Type Description/Material</i>	<i>Surface plating/Colour/Class</i>

FUNCTIONAL SYMBOLS ▽_A = 0 ▽_E = 0 ▽_F = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
	DIMENSION UNITS mm		SCALE 2:1		MEASUREMENTS WITHOUT TOLERANCE ACC. TO ISO 2768-m			molex			
					CURRENT REVISION			FCT D-Sub Mixed-Layout Connector			
				DRWN: DRAWN BY mteubel 19-12-2023							
				APPR: APPR BY msteinbrueck 21-12-2023							
	2		24410		INITIAL REVISION			PRODUCT CUSTOMER DRAWING			
	1							MATERIAL NUMBER		REVISION	
	REV.		CH.-NO.		DRWN: DRAWN BY tschneider01 02-02-2017			1731071031		2	
					APPR: APPR BY ssshref 03-02-2017						
	REPLACEMENT FOR: 1731071031_Rev.A1				FRIST ANGLE PROJECTION 		DRAWING A3-SIZE		DOCUMENT NUMBER FM3W3P-5852		CUSTOMER GENERAL MARKET