



Connectors > Power Connectors > Circular Power > Circular Power Connectors > Sealed Two-Piece Connector, CPC Series 6



Connector Product Type: **Housing**  
Operating Voltage: **600 VDC**  
Connector System: **Wire-to-Wire**  
Number of Positions: **16**  
Sealable: **Yes**

[All Sealed Two-Piece Connector, CPC Series 6 \(11\)](#)

Features

Product Type Features

|                                   |                             |
|-----------------------------------|-----------------------------|
| Connector Seal & Plug Type        | Peripheral, Wire Entry Seal |
| Connector Product Type            | Housing                     |
| Connector System                  | Wire-to-Wire                |
| Sealable                          | Yes                         |
| Connector & Contact Terminates To | Wire & Cable                |
| Connector & Housing Type          | Receptacle                  |
| Circular Connector Shell Type     | All Plastic                 |

Configuration Features

|                            |      |
|----------------------------|------|
| Reverse Numbering          | With |
| Number of Positions        | 16   |
| Number of Power Positions  | 4    |
| Number of Signal Positions | 12   |



Electrical Characteristics

|                   |         |
|-------------------|---------|
| Operating Voltage | 600 VAC |
|-------------------|---------|

Contact Features

|                    |        |
|--------------------|--------|
| Reverse Gender     | Yes    |
| Contact Type       | Socket |
| Contact Protection | With   |

Mechanical Attachment

|                       |                    |
|-----------------------|--------------------|
| Mating Alignment Type | Keyed              |
| Mating Alignment      | With               |
| Mating Retention Type | Threaded Coupling  |
| Thread Size           | 1-3/8 - 18 UNEF-2A |
| Polarization Code     | A                  |
| Mating Retention      | With               |
| Panel Mount Feature   | Without            |

Housing Features

|                               |          |
|-------------------------------|----------|
| Body Orientation              | Straight |
| Housing Color                 | Black    |
| Housing Material              | Nylon    |
| Circular Connector Shell Size | 23       |

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -55 – 105 °C[-67 – 221 °F] |
| Fluid Resistance            | Immersion                  |

Operation/Application

|                     |                |
|---------------------|----------------|
| Circuit Application | Power & Signal |
| Shielded            | No             |

Industry Standards

|                        |          |
|------------------------|----------|
| UL Flammability Rating | UL 94V-0 |
|------------------------|----------|

Packaging Features

|                    |      |
|--------------------|------|
| Packaging Quantity | 20   |
| Packaging Method   | Tray |

Product Compliance



For compliance documentation, visit the product page on TE.com>

|   |   |
|---|---|
| EU RoHS Directive 2011/65/EU                  | Compliant   |
| EU ELV Directive 2000/53/EC                   | Compliant   |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2024 (241)<br>Candidate List Declared Against: JUNE 2024 (241)<br>SVHC > Threshold:<br>Octamethylcyclotetrasiloxane (D4) (.5% in Component Part)<br>Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part)<br>Decamethylcyclopentasiloxane (D5) (.5% in Component Part)<br><b>Article Safe Usage Statements:</b><br>Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location. |
| Halogen Content                               | BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.  |
| Solder Process Capability                     | Not applicable for solder process capability  |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 796332-1  
SLD CPC PLUG ASSY,23-16,REV SX



TE Part # 6-2407269-3  
CAP, CPC, SIZE 23 RECP, RED



TE Part # 6-2407269-2  
CAP, CPC, SIZE 23 RECP, BLACK



TE Part # 6-2407269-4  
CAP, CPC, SIZE 23 RECP, YELLOW




TE Part # 6-2407269-1  
CAP, CPC, SIZE 23 RECP, ORANGE


Also in the Series | AMP CPC




Circular Power Connectors(458)

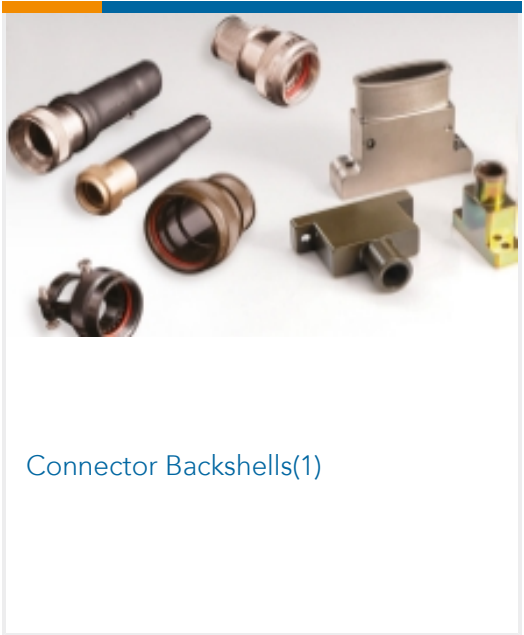

Connector Backshells(1)

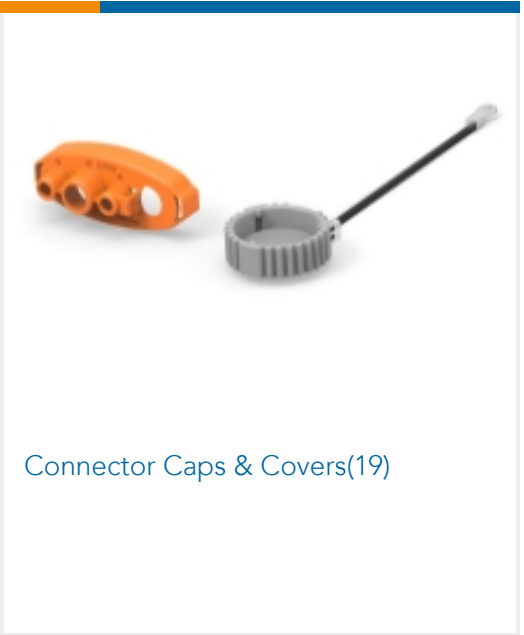

Connector Caps & Covers(19)

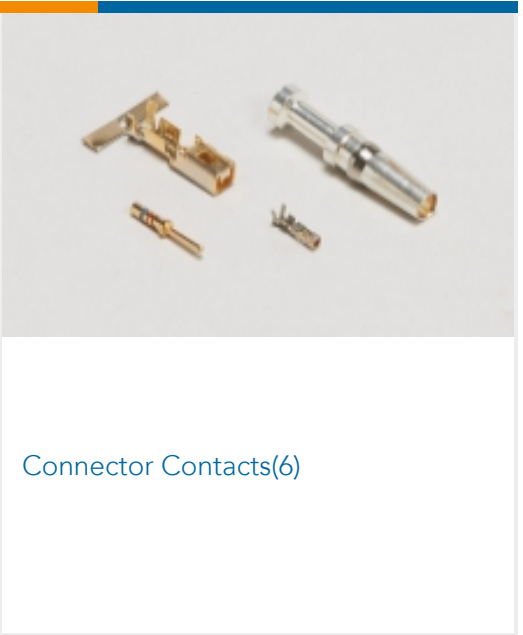


Connector Contacts(6)




Connector Hardware(12)




Connector Seals & Cavity Plugs(36)

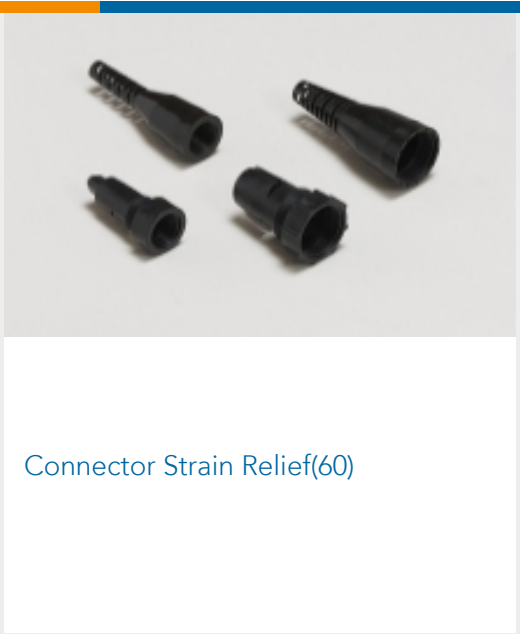

Connector Strain Relief(60)

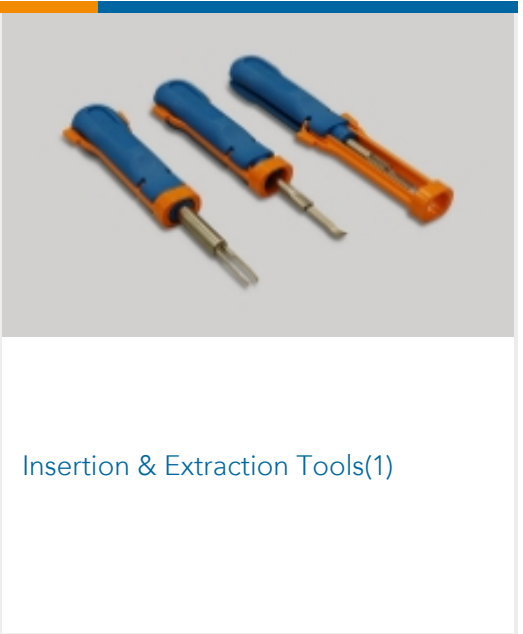

Insertion & Extraction Tools(1)

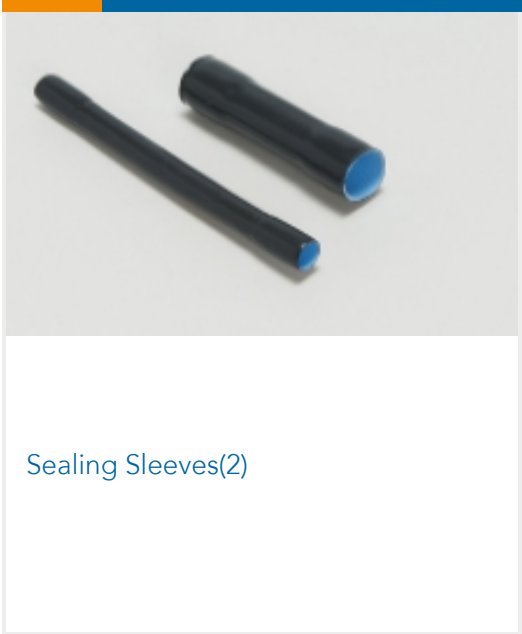

Sealing Sleeves(2)

Customers Also Bought



TE Part #02560407-000  
LVDT MHR 025 ASSY



TE Part #206151-1  
23-37 RECEPT STD SEX



TE Part #206305-1  
CPC PLUG ASSEMBLY SIZE 23-37




TE Part #2-6609104-4  
PE0S0DS6B=C1255







TE Part #521011-2  
ULTRA-POD 250 ASSY REC 18-14  
AWG TPBR

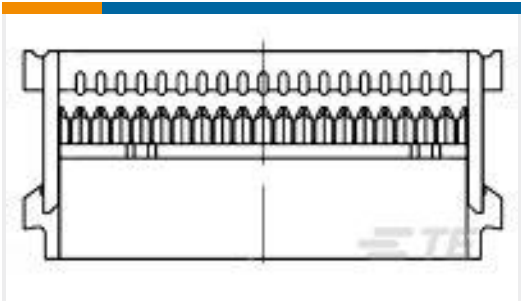


TE Part #1-1658526-9  
609-3441LF FEM SOCKET, LEAD FREE

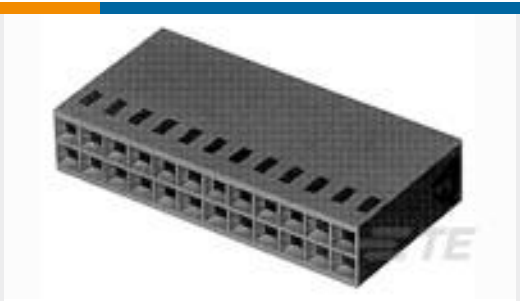

TE Part #87456-1  
06 MODIV HSG COMP DR .100CL

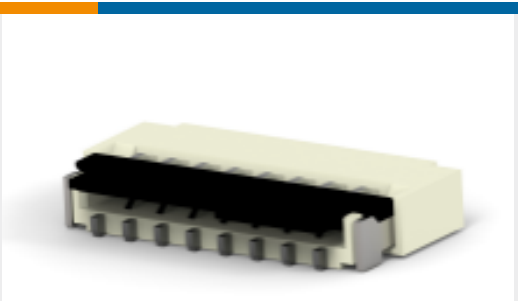

TE Part #3-2328724-9  
39PIN 0.3MM FPC CONNECTOR,  
FRONT FLIP

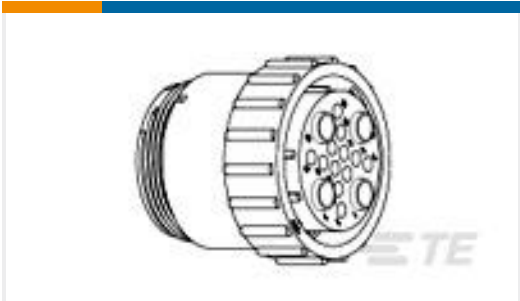

TE Part #796203-1  
SLD CPC PLUG ASSY, 23-16, STD SX



TE Part #2-1879445-5  
TE 120W 100R 5% Bracket

Documents

Product Drawings

SLD CPC RCPT ASSY, 23-16, REV SX

English

CAD Files

3D PDF

English

Customer View Model

ENG\_CVM\_796330-1\_F.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_796330-1\_F.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_796330-1\_F.3d\_stp.zip

English

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_796330-1\_H.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_796330-1\_H.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_796330-1\_H.3d\_stp.zip

English



By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages  
AMP Circular Connectors for Commercial Signal & Power Applications  
English

Product Specifications  
Product Specification  
English