
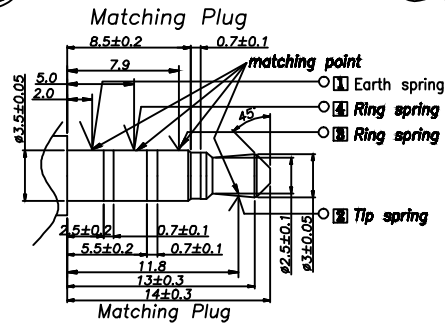

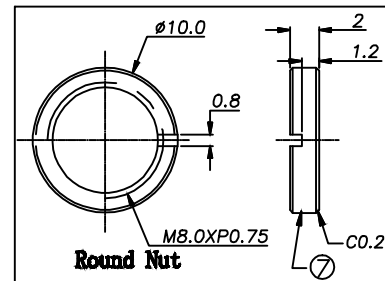

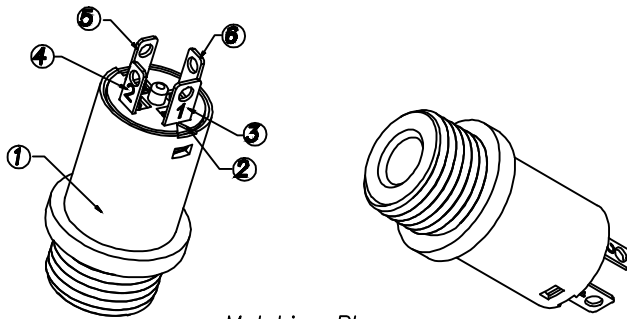


Specification:

1. Rating : DC 30V 0.5A;
 2. Contact resistance: $\leq 30m\Omega$;
After test: $\leq 50m\Omega$
 3. Insulation resistance: $\geq 100M\Omega$ (500VDC);
After test: $\geq 50M\Omega$
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 3N~30N;
 6. life test: 5000cycles min;
 7. Operation temperature range: $-20^{\circ}C \sim 70^{\circ}C$
 8. Preservative temperature range: $-40^{\circ}C \sim 85^{\circ}C$
- Sign "▲" is importance dimension.

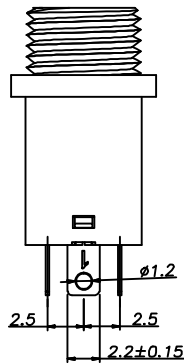

⑦	Nut	1	Brass	NTM08075H0-BSND	Nickel plating
⑥	Ring spring ④	1	Phosphor bronze t0.25	PJ31640-04	Siller/Gold plating
⑤	Ring spring ③	1	Phosphor bronze t0.25	PJ31640-03	Siller/Gold plating
④	Tip spring ②	1	Phosphor bronze t0.25	PJ31640-02	Siller/Gold plating
③	Earth spring ①	1	Phosphor bronze t0.25	PJ31640-01	Siller/Gold plating
②	Cover	1	PA66	PJ31640-S2	Black
①	Housing	1	PA66	PJ31640-S1	Black
NO.	DESCRIPTION	QTY	MATERIAL	PART NO.	REMARK

REVISIONS					UNSPECIFIED TOLERANCES		DSND	DATE	SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK		
ΔX					ANGLAR	±5°	DWN	DATE	VIEW:	PART NO.:		
ΔX					X.X	±0.2mm	CHKD	DATE	UNIT: mm	DWG NO.:		
X					X.XX	±0.1mm	APPD	DATE	SIZE: A4	PJ-31640		
MARK	DESCRIPTION	DATE	REVISED	APPROVED	X.XXX	±0.05mm		DATE		WEIGHT	SHEET	REVISION
							XKB INDUSTRIAL PRECISION CO.,LIMITED			1.0g	1/1	A0