


Wirewound Resistors

General Type

Normal & Miniature Style [KNP Series]

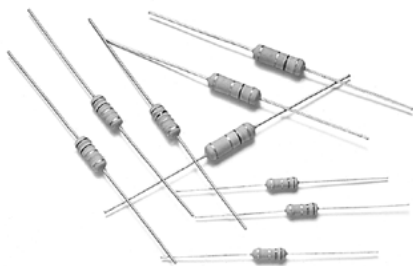

INTRODUCTION


The resistor element is a resistive wire which is wound in a single layer on a ceramic rod, with tinned connecting wires of electrolytic copper welded to the end-caps. The ends of the resistive wire are connected to the caps by welding. The resistors are coated with layers of green color flame-proof lacquer.

FEATURES

Power Rating	1/4W, 1/2W, 1W, 2W, 3W, 4W, 5W, 7W
Resistance Tolerance	±1%, ±5%
T.C.R.	±300ppm/°C
Flameproof Multi-layer Coating Meets	UL-94V-0
Flameproof Feature Meets Overload Test	UL-1412


DERATING CURVE

For resistors operated in ambient temperatures above 40°C, power rating must be derated in accordance with the curve below.

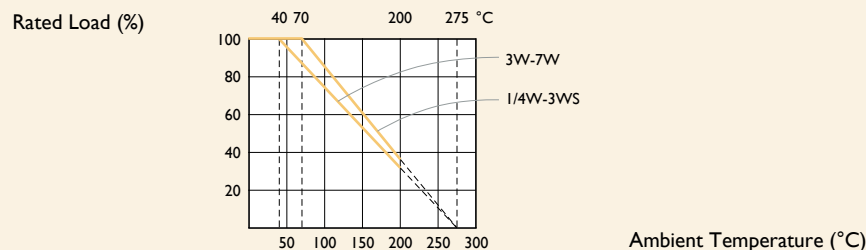

DIMENSIONS

Unit: mm



STYLE		DIMENSION			
Normal	Miniature	L	øD	H	ød
KNP-25	KNP50S	6.3±0.5	2.5±0.3	28±2.0	0.55±0.05
KNP-50	KNP1WS	9.0±0.5	3.5±0.3	26±2.0	0.55±0.05
KNP100	KNP2WS	11.5±1.0	4.6±0.5	35±2.0	0.8±0.05
	KNP3SS				
KNP200	KNP3WS	15.5±1.0	5.2±0.5	33±2.0	0.8±0.05
KNP300					
KNP400	KNP5WS	17.5±1.0	6.5±0.5	32±2.0	0.8±0.05
KNP500					
KNP600	KNP7WS	24.5±1.0	8.5±0.5	38±2.0	0.8±0.05
KNP700	-	24.5±1.0	8.5±0.5	38±2.0	0.8±0.05

Note: KNP1WS (for MB Type) ød = 0.8±0.05 mm

ELECTRICAL CHARACTERISTICS

NORMAL STYLE

STYLE	KNP-25	KNP-50	KNP100	KNP200	KNP300	KNP400	KNP500	KNP600	KNP700
Power Rating at 40°C					3W	4W	5W	6W	7W
Power Rating at 70°C	1/4W	1/2W	1W	2W					
Maximum working voltage	$\sqrt{P \times R}$								
Voltage Proof on Insulation	250V	300V	400V						
Resistance Range ($\pm 1\%$)	0.1 Ω - 150 Ω	0.1 Ω - 750 Ω	0.1 Ω - 1.5K Ω	0.1 Ω - 2.4K Ω	0.1 Ω - 3.3K Ω		0.1 Ω - 6.2K Ω		
Resistance Range ($\pm 5\%$)	0.1 Ω - 200 Ω	0.1 Ω - 800 Ω	0.1 Ω - 2.2K Ω	0.1 Ω - 2.7K Ω	0.1 Ω - 3.9K Ω		0.1 Ω - 6.8K Ω		
Operating Temp. Range	-40°C to +200°C								
Temperature Coefficient	$\pm 300\text{ppm}/^\circ\text{C}$								

Note: Special value is available on request

MINIATURE STYLE

STYLE	KNP50S	KNPIWS	KNP2WS	KNP3SS	KNP3WS	KNP5WS	KNP7WS
Power Rating at 40°C						5W	7W
Power Rating at 70°C	1/2W	1W	2W	3W			
Maximum working voltage	$\sqrt{P \times R}$						
Voltage Proof on Insulation	200V	300V	400V				
Resistance Range ($\pm 1\%$)	0.1 Ω - 150 Ω	0.1 Ω - 750 Ω	0.1 Ω - 1.5K Ω		0.1 Ω - 2.4K Ω	0.1 Ω - 3.3K Ω	
Resistance Range ($\pm 5\%$)	0.1 Ω - 200 Ω	0.1 Ω - 800 Ω	0.1 Ω - 2.2K Ω		0.1 Ω - 2.7K Ω	0.1 Ω - 3.9K Ω	
Operating Temp. Range	-40°C to +200°C						
Temperature Coefficient	$\pm 300\text{ppm}/^\circ\text{C}$						

Note: Special value is available on request

ENVIRONMENTAL CHARACTERISTICS

PERFORMANCE TEST	TEST METHOD		APPRAISE
Short Time Overload	IEC 60115-1 4.13	10 times rated power for 5 Sec.	$\pm 2.0\% + 0.05\Omega$
Voltage Proof on Insulation	IEC 60115-1 4.7	in V-block for 60 Sec., test voltage by type	By type
Temperature Coefficient	IEC 60115-1 4.8	-55°C to +155°C	By type
Insulation Resistance	IEC 60115-1 4.6	in V-block for 60 Sec.	>100M Ω
Solderability	IEC 60115-1 4.17	235 $\pm 5^\circ\text{C}$ for 3 ± 0.5 Sec	95% Min. coverage
Solvent Resistance of Marking	IEC 60115-1 4.30	IPA for 5 ± 0.5 Min. with ultrasonic	No deterioration of coatings and markings
Robustness of Terminations	IEC 60115-1 4.16	Direct load for 10 Sec. in the direction of the terminal leads	$\geq 2.5\text{kg}$ (24.5N)
Damp Heat Steady State	IEC 60115-1 4.24	40 $\pm 2^\circ\text{C}$, 90-95% RH for 56 days, loaded with 0.1 times RCWV	$\pm 5.0\% + 0.05\Omega$
Endurance at 70°C	IEC 60115-1 4.25	70 $\pm 2^\circ\text{C}$ at RCWV for 1,000 Hr. (1.5 Hr. on, 0.5 Hr. off)	$\pm 5.0\% + 0.05\Omega$
Temperature Cycling	IEC 60115-1 4.19	-55°C $\Rightarrow$ Room Temp. $\Rightarrow$ +155°C $\Rightarrow$ Room Temp. (5 cycles)	$\pm 1.0\% + 0.05\Omega$
Resistance to Soldering Heat	IEC 60115-1 4.18	260 $\pm 3^\circ\text{C}$ for 10 ± 1 Sec., immersed to a point 3 $\pm 0.5\text{mm}$ from the body	$\pm 1.0\% + 0.05\Omega$
Accidental Overload Test	IEC 60115-1 4.26	4 times RCWV for 1 Min.	No evidence of flaming or arcing

Note: Rated Continuous Working Voltage (RCWV) = $\sqrt{\text{Power Rating} \times \text{Resistance Value}}$ or Max. working voltage listed above, whichever less.

Revision: 201304



EXPLANATIONS OF ORDERING CODE

MFR	-12	F	T	F	52-	100R
Code 1 - 3 Series Name See Index	Code 4 - 6 Power Rating -05 = $\varnothing$ d0.5mm -06 = $\varnothing$ d0.6mm -07 = $\varnothing$ d0.7mm -08 = $\varnothing$ d0.8mm -10 = $\varnothing$ d1.0mm -14 = $\varnothing$ d1.4mm -12 = 1/6W -25 = 1/4W 25S = 1/4WS -50 = 1/2W 50S = 1/2WS 100 = 1W 1WS = 1WS 200 = 2W 2WS = 2WS 204 = 0.4W 207 = 0.6W 300 = 3W 3WS = 3WS 3WM = 3WM 400 = 4W 500 = 5W 5WS = 5WS 5SS = 5WSS 700 = 7W 7WS = 7WS 10A = 10W 20A = 20W 30A = 30W 40A = 40W 50A = 50W 10S = 10WS 15A = 15W 25A = 25W 10B = 100W 25B = 250W	Code 7 Tolerance P = $\pm 0.02\%$ A = $\pm 0.05\%$ B = $\pm 0.1\%$ C = $\pm 0.25\%$ D = $\pm 0.5\%$ F = $\pm 1\%$ G = $\pm 2\%$ J = $\pm 5\%$ K = $\pm 10\%$ - = Base on Spec.	Code 8 Packing Style T = Tape/Box R = Tape/Reel B = Bulk	Code 9 Temperature Coefficient of Resistance - = Base on Spec. A = ± 5 ppm/ $^{\circ}$ C B = ± 10 ppm/ $^{\circ}$ C C = ± 15 ppm/ $^{\circ}$ C S = ± 20 ppm/ $^{\circ}$ C D = ± 25 ppm/ $^{\circ}$ C E = ± 50 ppm/ $^{\circ}$ C F = ± 100 ppm/ $^{\circ}$ C G = ± 200 ppm/ $^{\circ}$ C H = ± 250 ppm/ $^{\circ}$ C I = ± 300 ppm/ $^{\circ}$ C J = ± 350 ppm/ $^{\circ}$ C	Code 10 - 12 Forming Type 26- = 26mm 52- = 52.4mm 73- = 73mm 81- = 81mm 91- = 91mm F = F Type FK = FK Type FKK = FKK Type FFK = F-form Kink M = M-Type Forming MB = M-form W/flat MT = MT Type Forming MR = MR Type AV = AVIsert PN = PANAsert	Code 13 - 17 Resistance Value 0R1 = 0.1 100R = 100 10K = 10,000 10M = 10,000,000

EXCEPTION:

• Cement series:

<Code 8>: Special packing style code

B: Bulk with wirewound or metal oxide sub-assembly for resistance value

W: Bulk with ceramic based wirewound sub-assembly for resistance value

M: Bulk with metal oxide sub-assembly for resistance value

F: Bulk with Fiberglass based wirewound sub-assembly for resistance value

<Code 10-12>: Without forming code

Example: **SQP500JB-10R**

• JPW series:

<Code 13-17>: without resistance value code

Example: **JPW-06-T-52-**

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Yageo:

[KNP1WSJT-52-10R](#) [KNP1WSJT-52-2R2](#) [KNP100JR-73-0R1](#) [KNP100JR-73-100R](#) [KNP100JR-73-10R](#) [KNP100JR-73-22R](#) [KNP100JR-73-2R2](#) [KNP100JR-73-47R](#) [KNP100JR-73-4R7](#) [KNP1WSJT-52-100R](#) [KNP1WSJT-52-47R](#) [KNP1WSJT-52-4R7](#) [KNP2WSJR-73-0R1](#) [KNP2WSJR-73-100R](#) [KNP2WSJR-73-10R](#) [KNP2WSJR-73-2R2](#) [KNP2WSJR-73-47R](#) [KNP2WSJR-73-4R7](#) [KNP1WSJT-52-22R](#) [KNP2WSJR-73-22R](#) [KNP100JR-73-120R](#) [KNP100JR-73-0R33](#) [KNP100JR-73-12R](#) [KNP100JR-73-27R](#) [KNP100JR-73-3R3](#) [KNP100JR-73-1R](#) [KNP100JR-73-220R](#) [KNP100JR-73-3R6](#) [KNP100JR-73-75R](#) [KNP100JR-73-6R8](#) [KNP100JR-73-5R1](#) [KNP100JR-73-3R](#) [KNP100JR-73-470R](#) [KNP100JR-73-150R](#) [KNP100JR-73-68R](#) [KNP100JR-73-0R22](#) [KNP100JR-73-20R](#) [KNP100JR-73-33R](#) [KNP100JR-73-5R6](#) [KNP100JR-73-2R](#) [KNP100JR-73-15R](#) [KNP100JR-73-51R](#) [KNP3WSJR-73-0R47](#) [KNP5WSJR-73-10R](#) [KNP200JR-73-2R2](#) [KNP200JR-73-10R](#) [KNP5WSJR-73-100R](#) [KNP200JR-73-0R47](#) [KNP3WSJR-73-47R](#) [KNP5WSJR-73-47R](#) [KNP200JR-73-100R](#) [KNP3WSJR-73-0R1](#) [KNP2WSJR-73-1R](#) [KNP200JR-73-0R1](#) [KNP5WSJR-73-0R22](#) [KNP2WSJR-73-0R47](#) [KNP3WSJR-73-0R22](#) [KNP5WSJR-73-22R](#) [KNP5WSJR-73-0R1](#) [KNP1WSJR-52-4R7](#) [KNP1WSJR-52-47R](#) [KNP2WSJR-73-0R22](#) [KNP200JR-73-1R](#) [KNP200JR-73-22R](#) [KNP3WSJR-73-1R](#) [KNP3WSJR-73-10R](#) [KNP5WSJR-73-0R47](#) [KNP5WSJR-73-4R7](#) [KNP1WSJR-52-0R22](#) [KNP1WSJR-52-2R2](#) [KNP100JR-73-0R47](#) [KNP1WSJR-52-22R](#) [KNP1WSJR-52-1R](#) [KNP1WSJR-52-10R](#) [KNP3WSJR-73-4R7](#) [KNP3WSJR-73-100R](#) [KNP3WSJR-73-22R](#) [KNP5WSJR-73-1R](#) [KNP3WSJR-73-2R2](#) [KNP200JR-73-0R22](#) [KNP1WSJR-52-100R](#) [KNP200JR-73-4R7](#) [KNP200JR-73-47R](#) [KNP5WSJR-73-2R2](#) [KNP100JR-73-0R27](#) [KNP1WSJR-52-39R](#) [KNP1WSJR-52-33R](#) [KNP100JR-73-0R18](#) [KNP100JR-73-0R15](#) [KNP100JR-73-1R5](#) [KNP1WSJR-52-5R1](#) [KNP100JR-73-0R43](#) [KNP100JR-73-43R](#) [KNP100JR-52-100R](#) [KNP100JR-52-0R12](#) [KNP100JR-52-0R47](#) [KNP100JR-52-33R](#) [KNP1WSJR-52-0R47](#) [KNP1WSJR-52-0R1](#) [KNP100FR-73-47R](#)