

**HSF** RoHS

**SPECIFICATIONS**

Rated(额定参数): 300V,8A

Dielectric strength(抗电强度): AC1600V/1 Minute

Insulation Resistance(绝缘电阻):1000MΩ Min

Contact Resistance(接触电阻):20mΩ Max






Temp. range(操作温度): -40℃~+105℃

MAX Soldering(瞬时温度):+250℃,5s

Housing Material(塑件): PA66 (UL94 V-0)

Contact(端子): Brass, Tin plating(黄铜镀锡)


PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM				
TO	OVER	OVER	TO	OVER	OVER	OVER	OVER
6	6 TO 10	10 TO 24	30	30 TO 60	60 TO 100	100 TO 150	150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00

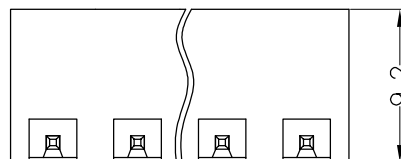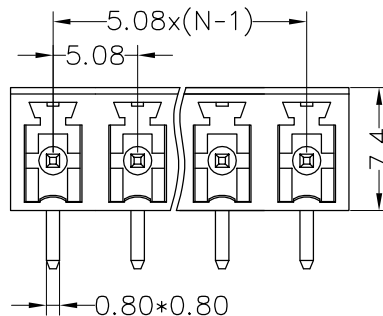

**Ordering Information**

**JL15EDGRC - 508 XX G X 1**

- Pitch 508=5.08PH
- No.of pins 2P~14P
- Housing Color  
B=Black  
G=Green  
U=Blue  
R=Red  
W=White  
Y=Yellow  
O=Orange  
E=Grey
- Packing  
Q=Pe bag  
T=Tube  
A=Tray

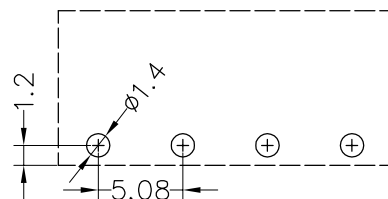

Recommended P.C.B Layout(Top Side)

OPERATION		DRAW	yiyusheng	19.05.21	SCALE	FIT
X.X	±0.30					
X.XX	±0.20	CHECK			UNIT	mm
X.XXX	±0.10				SIZE	A4
Angle	±3°	APPROVE			SHEET	1/1
DIM	TOL				PROJ.	

**JILN** 深圳市锦凌电子有限公司  
**SHENZHEN JINLING ELECTRONIC CO.,LTD**  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

A0	2019.05.21	NEW DRAWING	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE

PART NO. JL15EDGRC-508XXGX1  
 TITLE: 5.08mm Pitch Male L=12.5mm Pluggable Terminal Blocks