


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
	C	ECR-18-004799	02MAY2018	PHM	DW		


1. MAXIMUM CONNECTOR INSERTION LOSS 1.5 dB PRO BEAM JR. (1550nm)
 WHEN TESTED TO TIA-EIA-171, METHOD-D3: 0.5 dB LC (1550nm)

2. MINIMUM CONNECTOR RETURN LOSS: 34 dB PRO BEAM JR. (1550nm)
 55 dB LC (1550nm)

3 SEE TRACE LABEL DETAIL.

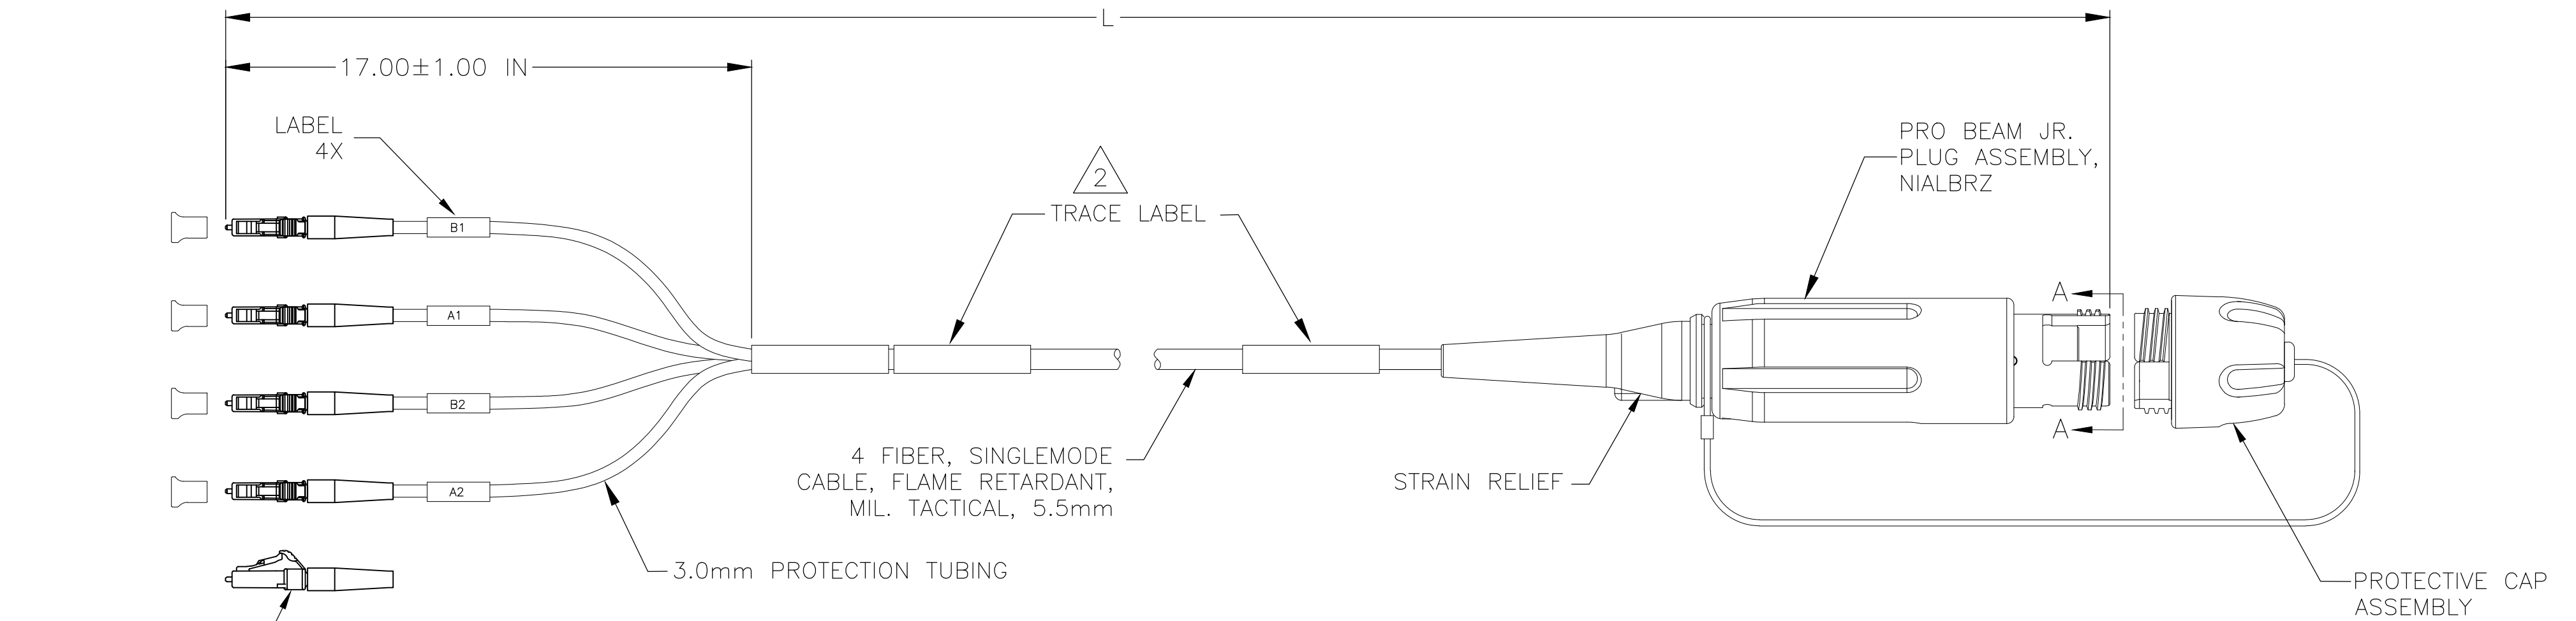


LC CONNECTOR 4X

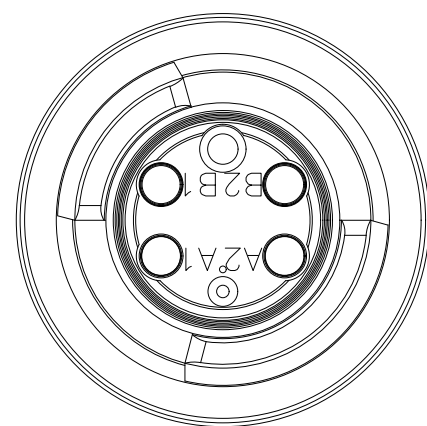

VIEW A-A
(NOT TO SCALE)

TE CONNECTIVITY
BAR CODE



XXXXXXXXXXXXXXXXXX

STE MADE IN XXXX 1938500-X

TE CONNECTIVITY
TRACE NO.

TE CONNECTIVITY
PART NO.

TRACE LABEL DETAIL 3

LC LABEL	PRO BEAM JR. POSITION
B1	A1
A1	B1
B2	A2
A2	B2

FIBER PATH CHART

30.5+1.0/-0	1938500-2
15.000±0.150	1938500-1
L	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	K.GLATFELTER	22MAR2010	STE TE Connectivity																	
DIMENSIONS: METERS		CHK	J.BARRY	22MAR2010																		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	J.BARRY	22MAR2010																		
<table border="0"> <tr><td>0 PLC</td><td>±</td><td>-</td></tr> <tr><td>1 PLC</td><td>±</td><td>-</td></tr> <tr><td>2 PLC</td><td>±</td><td>-</td></tr> <tr><td>3 PLC</td><td>±</td><td>-</td></tr> <tr><td>4 PLC</td><td>±</td><td>-</td></tr> <tr><td>ANGLES</td><td>±</td><td>-</td></tr> </table>		0 PLC	±	-		1 PLC	±	-	2 PLC	±	-	3 PLC	±	-	4 PLC	±	-	ANGLES	±	-	PRODUCT SPEC	
0 PLC	±	-																				
1 PLC	±	-																				
2 PLC	±	-																				
3 PLC	±	-																				
4 PLC	±	-																				
ANGLES	±	-																				
MATERIAL	FINISH	WEIGHT			NAME	CABLE ASSEMBLY, FIBER OPTIC, 4 FIBER, SINGLEMODE, PRO BEAM JR., PLUG (NIALBRZ) TO (4) LC, 4 x 1550nm																
		CUSTOMER DRAWING	SCALE	NTS	SIZE	A2	RESTRICTED TO															
					CAGE CODE	00779																
					DRAWING NO	C=1938500																
					SHEET	1 of 1	REV															
					REV	C																