

### General Description

The SN74AHCT1G08 device is a single 2-input positive-AND gate. The device performs the Boolean function  $Y = A \cdot B$  or  $Y = \overline{A + B}$  in positive logic. Low  $I_{CC}$  current allows this device to be used in power-sensitive or battery-powered applications.

### Features

- Operating Range: 4.5 V to 5.5 V
- Maximum tpd of 7.1 ns at 5 V
- Low Power Consumption: Maximum  $I_{CC}$  of 10  $\mu$ A
- $\pm 8$  mA Output Drive at 5 V
- Inputs are TTL-Voltage Compatible
- Packages are SC70-5, SOT23-5 or small DFN6
- MSL3(SC70-5, SOT23-5, DFN6(1\*1.5))

### Pin Configuration

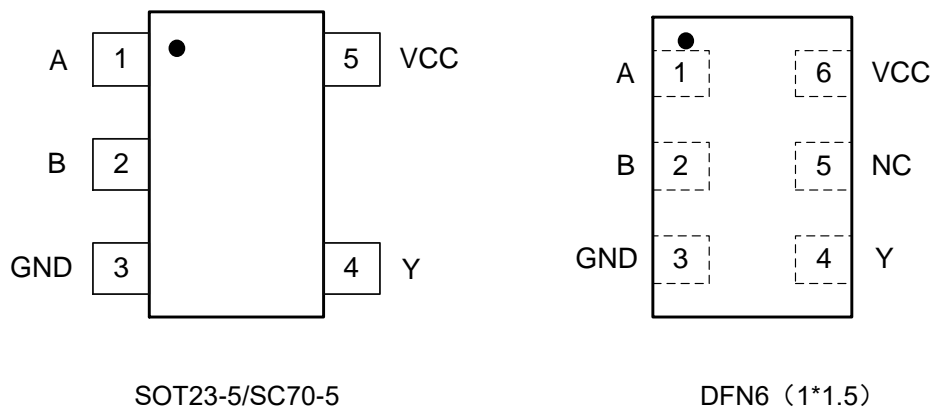


Figure1. Top View

**Pin Function**

SC70-5/ SOT23-5

Pin No.	Pin Name	Function
1	A	Input A
2	B	Input B
3	GND	Ground
4	Y	Output
5	VCC	Supply Voltage

**DFN6**

Pin No.	Pin Name	Function
1	A	Input A
2	B	Input B
3	GND	Ground
4	Y	Output
5	NC	No connect
6	VCC	Supply Voltage

**Block Diagram**

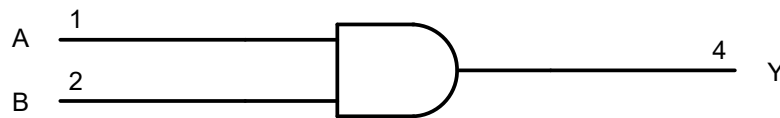


Figure2. Logic Symbol

**Functional Description**

**Function Table**

Input		Output
A	B	Y
L	L	L
L	H	L
H	L	L
H	H	H

### Absolute Maximum Ratings

Symbol	Parameter		Value	Unit
V <sub>CC</sub>	DC Supply Voltage		-0.5 to 7.0	V
V <sub>I</sub>	DC Input Voltage <sup>(1)</sup>		-0.5 ≤ V <sub>I</sub> ≤ +7.0	V
V <sub>O</sub>	DC Output Voltage Output in Higher or Low State		-0.5 to V <sub>CC</sub> + 0.5	V
I <sub>IK</sub>	DC Input Diode Current	V <sub>I</sub> < GND	-20	mA
I <sub>OK</sub>	DC Output Diode Current	V <sub>O</sub> < GND, V <sub>O</sub> > V <sub>CC</sub>	±20	mA
I <sub>O</sub>	DC Output Sink Current		±25	mA
I <sub>CC</sub>	DC Supply Current per Supply Pin		±50	mA
I <sub>GND</sub>	DC Ground Current per Supply Pin		±50	mA
T <sub>STG</sub>	Storage Temperature Range		-65 to 150	°C
T <sub>L</sub>	Lead Temperature, 1 mm from Case for 10 Seconds		260	°C
T <sub>J</sub>	Junction Temperature Under Bias		150	°C
V <sub>ESD</sub>	ESD Classification	Human Body Model <sup>(2)</sup>	±4000	V
		Charged Device Model <sup>(3)</sup>	±1000	
I <sub>LU</sub>	Latch-up Current Above V <sub>CC</sub> and GND at 125°C <sup>(4)</sup>		±100	mA

### Thermal Characteristics

Symbol	Package	Ratings	Value	Unit
R <sub>θJA</sub>	SC70-5	Thermal Characteristics,	300	°C/W
	SOT23-5	Thermal Resistance,	250	
	DFN6(1.0×1.5)	Junction-to-Air	440	
R <sub>θJB</sub>	SC70-5	Thermal Characteristics,	75	°C/W
	SOT23-5	Thermal Resistance,	65	
	DFN6(1.0×1.5)	Junction-to-board	270	
P <sub>D</sub>	SC70-5	Power Dissipation in Still Air at 85°C	215	mW
	SOT23-5		260	
	DFN6(1.0×1.5)		150	

### Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V <sub>CC</sub>	Supply Voltage	4.5	5.5	V
V <sub>IH</sub>	High-level Input Voltage	2		V
V <sub>IL</sub>	Low-level Input Voltage		0.8	V
V <sub>I</sub>	Input Voltage	0	5.5	V
V <sub>O</sub>	Output Voltage	0	V <sub>CC</sub>	V
I <sub>OH</sub>	High-level Output Current		-8	mA
I <sub>OL</sub>	Low-level Output Current		8	mA
Δt/Δv	Input Transition Rise and Fall Rate		20	ns/V
T <sub>A</sub>	Operating Temperature Range	-40	125	°C

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied.

### Electrical Characteristics

#### DC Electrical Characteristics

Symbol	Parameter	Condition	V <sub>CC</sub> (V)	T <sub>A</sub> =25°C			-40°C ≤ T <sub>A</sub> ≤ 125°C		Unit
				Min	Typ	Max	Min	Max	
V <sub>OH</sub>	High-Level Output Voltage	I <sub>OH</sub> =-50μA	4.5	4.4	4.5		4.4		V
		I <sub>OH</sub> =-8mA	4.5	3.94			3.8		
V <sub>OL</sub>	Low-Level Output Voltage	I <sub>OL</sub> =50μA	4.5			0.1		0.1	V
		I <sub>OL</sub> =8mA	4.5			0.36		0.44	
I <sub>I</sub>	Input Current	V <sub>IN</sub> = 5.5V or GND	0 to 5.5			±0.1		±1	μA
I <sub>CC</sub>	Supply Current	V <sub>IN</sub> = V <sub>CC</sub> or GND, I <sub>O</sub> = 0	5.5			1.0		10	μA
ΔI <sub>CC</sub> <sup>(5)</sup>	Change in Supply Current	One input at 3.4 V, Other Inputs at V <sub>CC</sub> or GND	5.5			1.35		1.5	mA
C <sub>I</sub>	Input Capacitance	V <sub>IN</sub> = V <sub>CC</sub> or GND	5		3	10			pF

**Note5:** This is the increase in supply current for each input at one of the specified TTL voltage levels, rather than 0 V or V<sub>CC</sub>.

### Switching Characteristics

Over recommended operating free-air temperature range,  $V_{CC} = 5V \pm 0.5V$  (unless otherwise noted)  
(see Figure 3)

Symbol	Parameter	Condition	$T_A = 25^\circ\text{C}$			$-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$		$-40^\circ\text{C} \leq T_A \leq 125^\circ\text{C}$		Unit
			Min	Typ	Max	Min	Max	Min	Max	
$t_{PLH}$	Propagation Delay	$C_L = 15\text{pF}$		2.5	6.2	1	7.1	1	7.5	ns
$t_{PHL}$		$C_L = 15\text{pF}$		4.5	6.8	1	7.1	1	7.5	ns
$t_{PLH}$		$C_L = 50\text{pF}$		3.0	7.9	1	9	1	10	ns
$t_{PHL}$		$C_L = 50\text{pF}$		5.5	8.3	1	9	1	10	ns


### Operating Characteristics

$V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$

Symbol	Parameter	Condition	Typ	Unit
$C_{PD}$	Power Dissipation Capacitance <sup>(6)</sup>	No load, $f = 1\text{ MHz}$	12	pF

**Note6:**  $C_{PD}$  is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation:  $I_{CC(OPR)} = C_{PD} \times V_{CC} \times f_{in} + I_{CC} \times C_{PD}$  is used to determine the no-load dynamic power consumption;  $P_D = C_{PD} \times V_{CC}^2 \times f_{in} + I_{CC} \times V_{CC} \times Fig.$

Waveform and Test Circuit

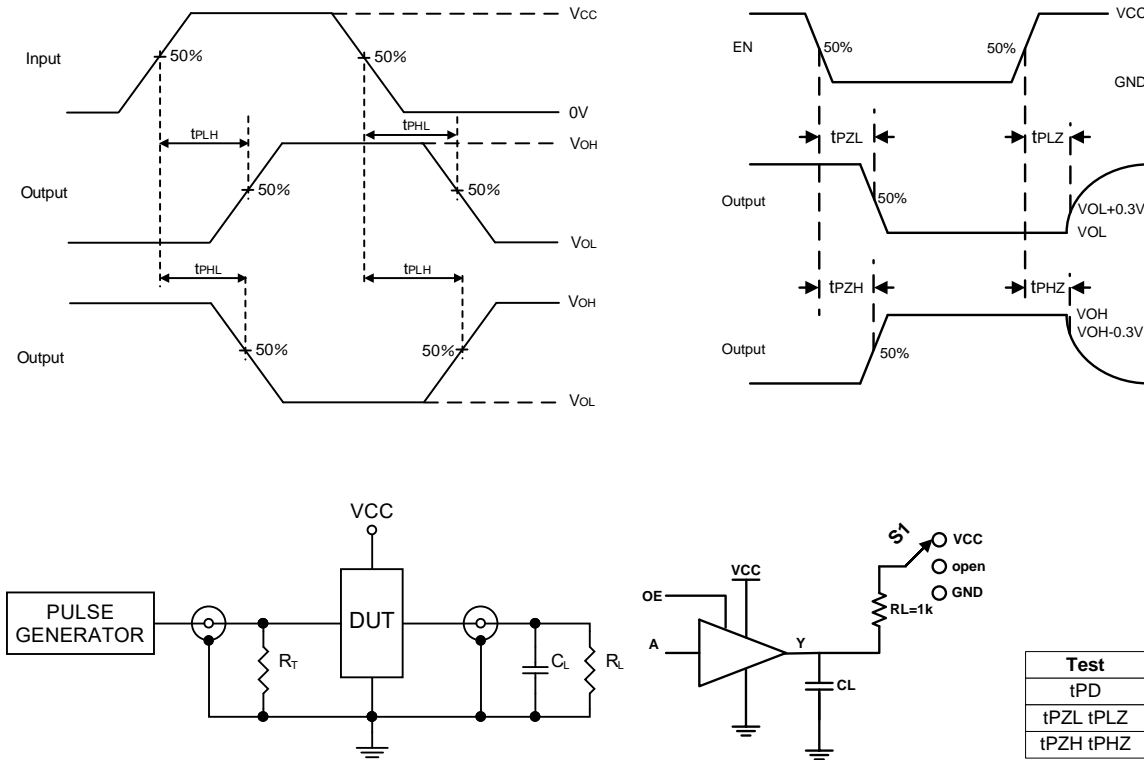

CL includes probe and jig capacitance

All input pulses are supplied by generators having the following characteristics: PRR ≤ 1MHz, ZO=50Ω, tr ≤ 3ns, tf ≤ 3 ns.


The outputs are measured one at a time with one input transition per measurement.

All parameters and waveforms are not applicable to all devices.

Figure3. Load Circuit and Voltage Waveforms

Package Dimension


SC70-5

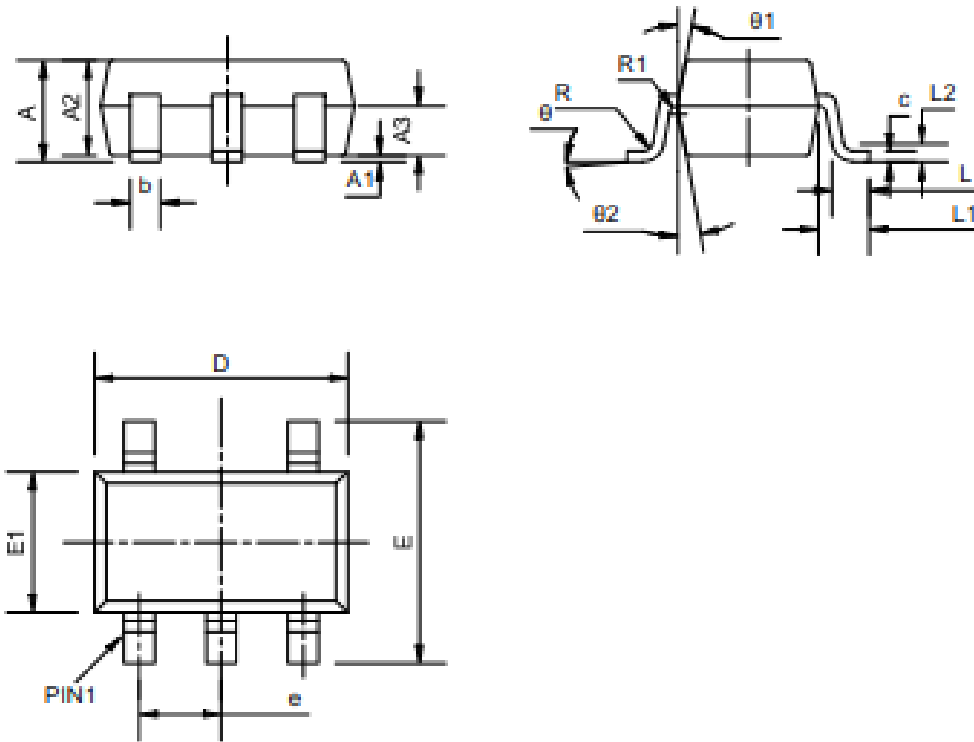





COMMON DIMENSIONS  
(UNITS OF MEASURE=MILLIMETER)

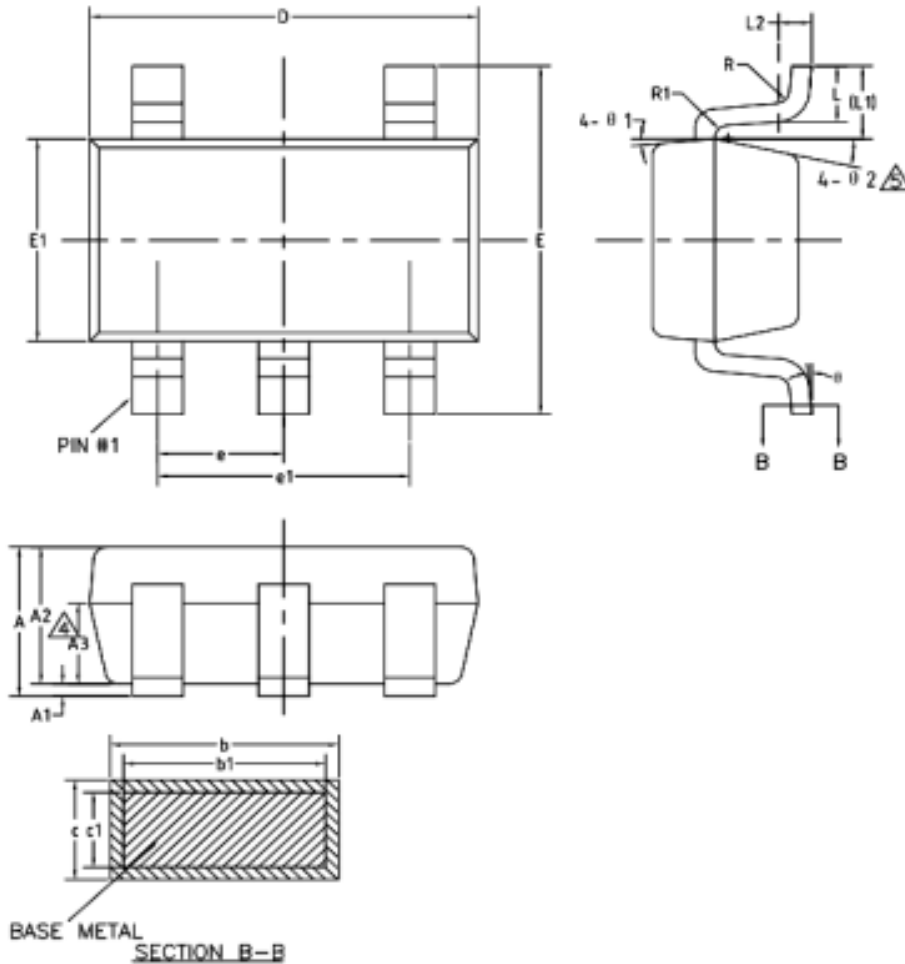SYMBOL	MIN	NOM	MAX
A	0.85	--	1.05
A1	0	--	0.10
A2	0.80	0.90	1.00
A3	0.47	0.52	0.57
b	0.23	--	0.33
c	0.12	--	0.18
D	2.02	2.07	2.12
E	2.20	2.30	2.40
E1	1.25	1.30	1.35
e	0.60	0.65	0.70
L	0.28	0.33	0.38
L1	0.50REF		
L2	0.15BSC		
R	0.10	--	--
R1	0.10	--	0.25
$\theta$	0°	--	8°
$\theta1$	6°	9°	12°
$\theta2$	6°	9°	12°

SOT23-5




COMMON DIMENSIONS  
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	—	—	1.25
 A1	0	—	0.15
A2	1.00	1.10	1.20
A3	0.60	0.65	0.70
b	0.36	—	0.50
b1	0.36	0.38	0.45
c	0.14	—	0.20
c1	0.14	0.15	0.16
D	2.826	2.926	3.026
E	2.60	2.80	3.00
E1	1.526	1.626	1.726
e	0.90	0.95	1.00
 e1	1.80	1.90	2.00
L	0.35	0.45	0.60
L1	0.59REF		
L2	0.25BSC		
R	0.10	—	—
R1	0.10	—	0.25
theta	0° — 8°		
 theta 1	3°	5°	7°
 theta 2	6°	—	14°



DFN6(1x1.5)

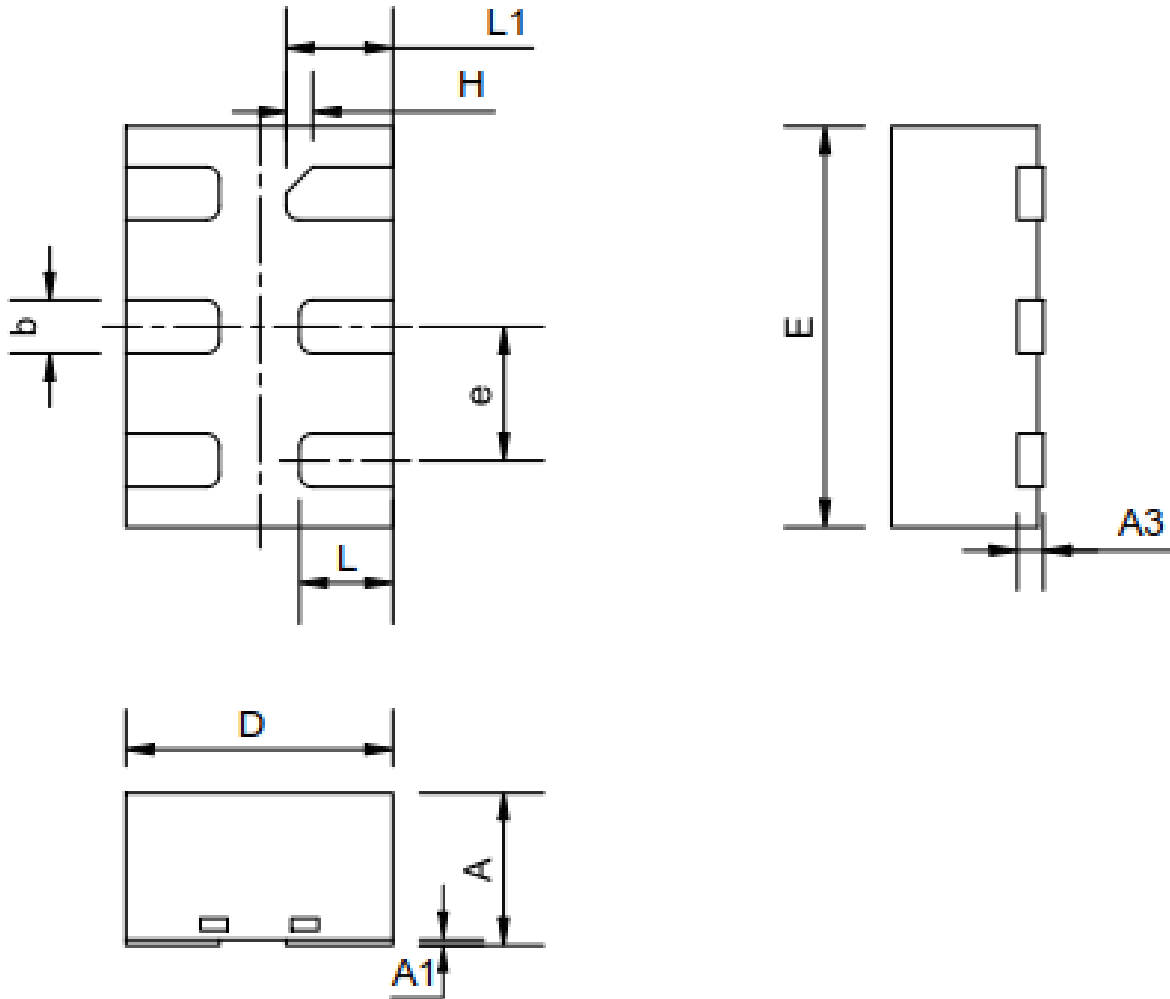

COMMON DIMENSIONS  
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	0.50	--	0.60
A1	0	0.02	0.05
A3	0.10REF		
b	0.15	0.20	0.25
D	0.90	1.00	1.10
E	1.40	1.50	1.60
e	0.40	0.50	0.60
H	0.10REF		
L	0.30	0.35	0.40
L1	0.35	0.40	0.45

**Ordering information**

Order code	Marking code	Package	Baseqty	Delivery mode
UMW SN74AHCT1G08DBVR	B08S U	SOT23-5	3000	Tape and reel
UMW SN74AHCT1G08DCKR	BEG U	SC70-5	3000	Tape and reel
UMW SN74AHCT1G08DRYR	—	DFN6 (1*1.5)	5000	Tape and reel