





SCALE 2/1



RECOMMENDED
PANEL CUT-OUT

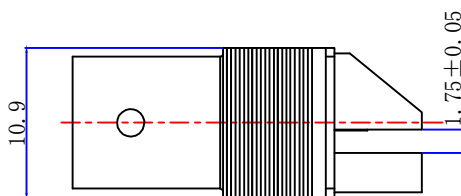

RECOMMENDED
PCB LAYOUT

SPECIFICATIONS:

Impedance: 75 Ohms

Frequency Range: Please refer to the table above


VSWR: 1.3max

Working Voltage: 500V RMS @ SEA level

Insulation Resistance: 5000 Ohms min

Temperature Range: -55°C TO +155°C


Drawings products are in line with ROHS standards

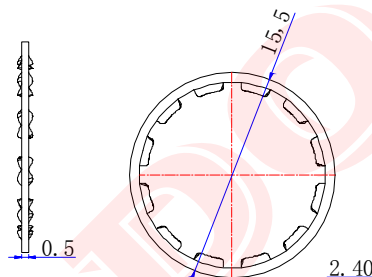

WASHER



2.40



NUT

NOTE:

DRAWN
Zelin. Zhang


CHECKED

APPROVALS

Tolerance

0-6 ±0.10
6-30 ±0.15
30-120 ±0.20
Angular ±5°

View



UNIT

MM

SCALE

1:1



Dosing Industrial (HK) Co., Ltd

东莞市德索五金电子制品有限公司

Dosing Hardware Electronics Co., Ltd

E-mail: dosin2005@163.com

dosin2005@dosin-china.com

Web: http://www.dosinconn.com

TEL: (0086) 769-81153906

FAX: (0086) 769-81875836

Name:

BNC JACK FOR PCB CONNECTOR

SIZE

A

Product NO. DOSIN-801-0075

REV

A

Date/Time

2018/08/05

CAD FILE

H/company drawings/BD

SHEET: 1 OF 1

1	Body	Zinc	Gold
2	Contact pin	Phosphor copper	Gold
3	Insulation	PTFE	White
4	NUT	BRASS	Gold
5	WASHER	Iron	Gold

NO	Component Number	Material	Finish
----	------------------	----------	--------