

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	12.90~13.10	18.9~19.1
1.25~2.00	12.90~13.10	19.1~19.2
2.00~3.00	12.90~13.10	19.3~19.4

NOTES:

1. Rating:

- CQC 6A 250VAC 6(8)A 250VAC
- 8A/128A 250VAC T105/55
- UL cUL 6GPA 250VAC
- 10GPA 125VAC
- TV-5 T105/55

VDE ENEC 6(4)A 250VAC T85/55

KC 6(4)A 250VAC T85/55

TUV 8/128A 250VAC T85/55

2. Circuit Diagram: 4P ON-OFF

3. Terminal Strength: ≥80N

4. Electrical life: ≥10000 cycles

5. Withstand Voltage: Withstand Voltage: 1500VAC 1min



Terminals to Button: 3000VAC 1min

Leakage Current: 1mA

6. Current resistance: ≤50mΩ (initial)

7. Insulation resistance: ≥100MΩ

8. Body Material: NYLON 66 94V-0~2

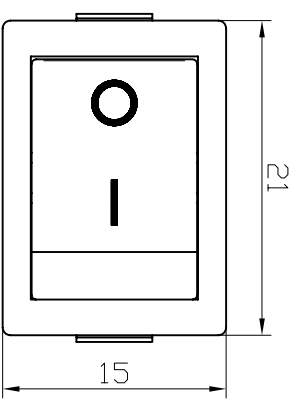

深圳市华灿天禄电子有限公司

普通公差:

COMMON TOLERANCE:

A4			
A3			
A2		UP TO 5	±0.20
A1		ABOVE 5 TO 30	±0.30
		ABOVE 30	±0.50
REV.	DATE	REVISION DESCRIPTION	ISSUE
			ANGULAR ±5°

单位	mm	投影	1:1	产品名称	跷板开关	比例	Free
绘图	吴	校对	梁金勇	型号	RS601D		
日期	2015.09.08	核准	周培雷	图号	RS601D-201N006RB		