





Datasheet

ENGLISH

Stock No: 877-2419

RS Pro 8 Way Surface Mount DIP Switch SPST, Flush Slide Actuator



- Low profile 2.2mm high
- Top tape seal for washing process
- Surface mount
- Gold contacts for high reliability
-



General Specifications


- Contact Rating 25mA 24VDC
- Contact Resistance 100m max.
- Insulation Resistance 100M min, 500VDC
- Dielectric Strength 300VAC/1 Minute
- Operating Force 500gf max
- Travel 0.8mm
- Operating Life 1000 Cycles
- Operating Temperature -40C to +85C
- Storage Temperature -40C to +85C

Materials

- Cover/Base: Black thermoplastic Nylon
- Actuator: White thermoplastic LCP
- Contact: Gold plated copper alloy
- Terminals: Nickel plated brass
- Tape seal: Kapton film
- UL94-V0

Packaging

• IC Tube & T/R (see chart on next page)

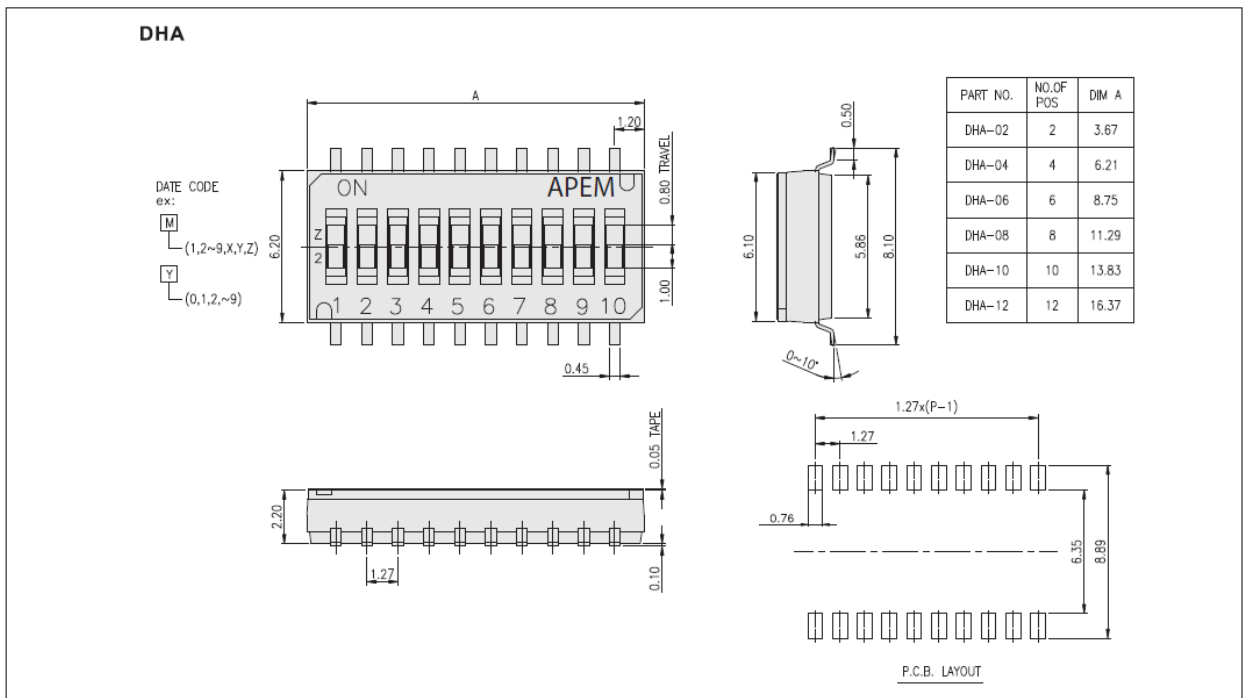


Note: The company reserves the right to change specifications without notice.

DHA series

2.2mm Half Pitch Type

Overview Cont

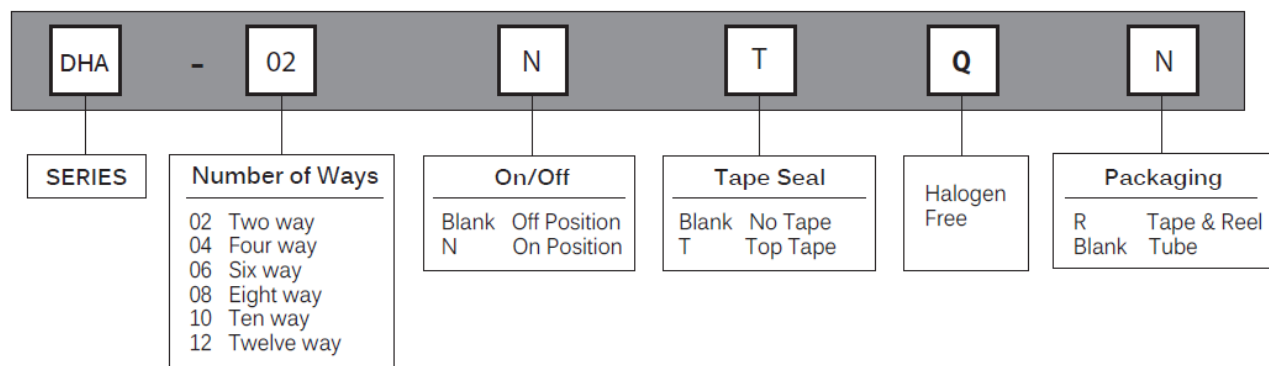

Packaging



Tape & Reel
1800pcs

Tube
DHA-02: 125pcs
DHA-04: 75pcs
DHA-06: 54pcs
DHA-08: 40pcs
DHA-10: 33pcs
DHA-12: 27pcs