

TE Internal #: 5406443-1 RJ45 Connector, Multiple Ports, 1 x 2, Standard Connector Contact Density, Jack, Shielded, Cat 5, Standard - Latch Down, 8 Position, Standard Profile

View on TE.com >

Connectors > Modular Jacks & Plugs > RJ45 Connectors



Modular Jack & Plug Interface Type: RJ45 Port Configuration: Multiple Ports Port Matrix Configuration: 1 x 2 Modular Jacks & Plugs Products: RJ Type Jacks & Plugs Connector Contact Density: Standard

Features

Product Type Features



Connector Product Type	Connector Assembly	
Modular Jack & Plug Interface Type	RJ45	
Modular Jacks & Plugs Products	RJ Type Jacks & Plugs	
Modular Connector Style	Jack	
Grounding Options	PCB Ground	
Connector & Contact Terminates To	Printed Circuit Board	
Configuration Features		
Number of PCB Ground Tabs	2	
Multiple Port Configuration	Ganged Multiple Ports	
Port Configuration		
Port Matrix Configuration	1 x 2	
Connector Contact Density	Standard	
Number of Positions	8	
Number of Loaded Positions	8	
PCB Mount Orientation	Right Angle	

C For support call+1 800 522 6752

RJ45 Connector, Multiple Ports, 1 x 2, Standard Connector Contact Density, Jack, Shielded, Cat 5, Standard - Latch Down, 8 Position, Standard Profile



Body Features

PCB Ground Tab Location	4.57 mm[.18 in]	
Shield Plating Material	Tin over Copper	
Shield Material	Copper Zinc Alloy	
Modular Jack Latch Orientation	Standard - Latch Down	
Connector Profile	Standard	
Contact Features		
Contact Underplating Material	Nickel	
PCB Contact Termination Area Plating Material	Tin	
Contact Current Rating (Max)	.2 A, 1.5 A	
Contact Mating Area Plating Material	Gold Phosphor Bronze	
Contact Base Material		
Contact Mating Area Plating Material Thickness	1.27 μm[50 μin]	
Termination Features		
Termination Method to PCB	Through Hole - Solder	
Termination Post & Tail Length	3.56 mm[.14 in]	
Mechanical Attachment		

Panel Mount Feature	Without
Connector Mounting Type	Board Mount
Housing Features	
Mating Entry Location	Side
Centerline (Pitch)	1.02 mm[.04 in]
Housing Color	Black
Housing Material	High Temperature Nylon
Dimensions	
Connector Height	13.64 mm[.537 in]
Usage Conditions	
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	
Indicator Type	Not Illuminated
Shielded	Yes

RJ45 Connector, Multiple Ports, 1 x 2, Standard Connector Contact Density, Jack, Shielded, Cat 5, Standard - Latch Down, 8 Position, Standard Profile



Circuit Application	Signal	
ndustry Standards		
UL Flammability Rating	UL 94V-0	
Performance Category	Cat 5	
Packaging Features		
Packaging Quantity	45	
Packaging Method	Box & Tray, Tray	
·		
•	Compliant	
or compliance documentation, visit the product page on TE.com>	Compliant Compliant	
or compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU		
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC	Compliant No Restricted Materials Above Threshold Current ECHA Candidate List: JUNE 2024	
or compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC China RoHS 2 Directive MIIT Order No 32, 2016	Compliant No Restricted Materials Above Threshold Current ECHA Candidate List: JUNE 2024 (241)	
For compliance documentation, visit the product page on TE.com EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC China RoHS 2 Directive MIIT Order No 32, 2016	Compliant No Restricted Materials Above Threshold Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE	
EU ELV Directive 2000/53/EC China RoHS 2 Directive MIIT Order No 32, 2016	Compliant No Restricted Materials Above Threshold Current ECHA Candidate List: JUNE 2024 (241)	

ppm.

Solder Process Capability

Wave solder capable to 265°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

RJ45 Connector, Multiple Ports, 1 x 2, Standard Connector Contact Density, Jack, Shielded, Cat 5, Standard - Latch Down, 8 Position, Standard Profile



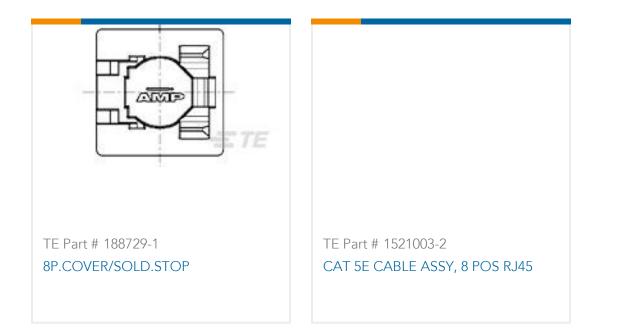

Customers Also Bought



CFR16 5% 4/0R	RINF-100-1/4-4-STK	104-0001-26	JAM NUT	

Documents

Product Drawings MJ ASSY,2P,8POS,R/A,PCB,CAT5

English

CAD Files

Customer View Model ENG_CVM_5406443-1_D.3d_stp.zip

English

Customer View Model

ENG_CVM_5406443-1_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_5406443-1_D.3d_igs.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

RJ45 Connector, Multiple Ports, 1 x 2, Standard Connector Contact Density, Jack, Shielded, Cat 5, Standard - Latch Down, 8 Position, Standard Profile



Datasheets & Catalog Pages

82066 - Modular Jacks and MRJ21 Product catalog - Multi-Port Modular Jacks section

English

Product Specifications Application Specification

English