






REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.08.08	阿树

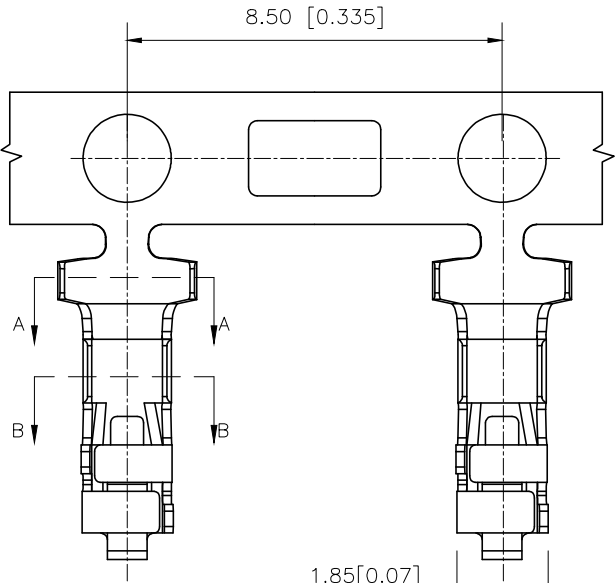

SECTION: A-A
SCALE:1:1

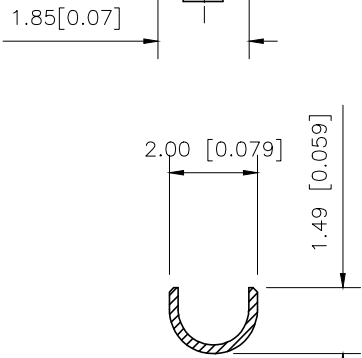

SECTION: B-B
SCALE:1:1

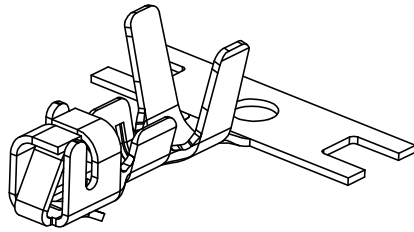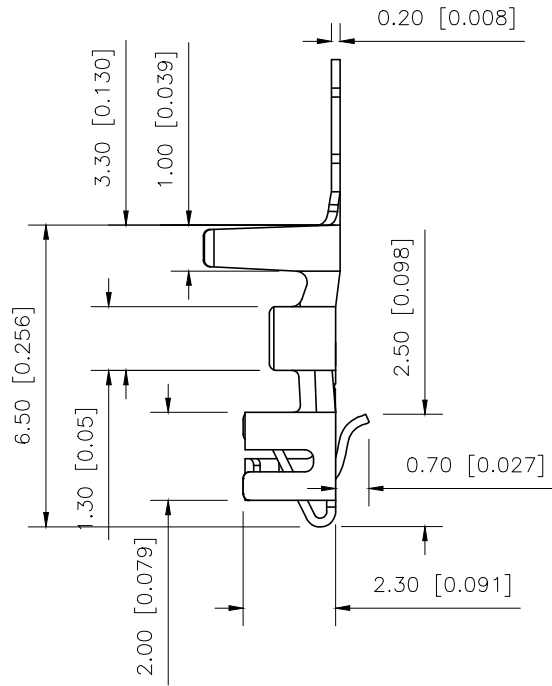

Specifications:
规格:
Voltage rating:500V AC/DC
额定电压: 500V AC/DC
Current rating:3A AC/DC
额定电流: 3A AC/DC
Withstanding voltage:1000V AC/minute
耐受电压: 1000V AC/分钟
Temperature range:-45℃~+125℃
温度范围: -45℃~+125℃
Insulation resistance:≥1000MΩ
绝缘电阻: ≥1000MΩ
Contact resistance:≤10mΩ
接触电阻: ≤10mΩ
After environmental testing:≤20mΩ
环境测试后: ≤20兆欧

PART NO.:
X8821 I F P SN-L
① ② ③ ④ ⑤ ⑥
① Series No.
② Category:T-Terminal
③ Shape:F-Female Terminal
④ Material:P-Phosphor bronze
⑤ Plating Style: SN-Bright Tin Plating
⑥ Mold No./Mark/Special No.: L-With Lock

X8821T-PSN-L	Phosphor Bronze	AWG#22-26	1.90mm(Max)	Stamping Before Plating:30u" N;70c' Sn	X8821H-L
PART NO	Material	Wire Range	Insulation O.D	Finish	Used In XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 2.50 mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.: X8821TF-PSN-L
APPROVED		SIZE:	A4	DWG NO.: