

INTRODUCTION:

Adam Tech RS Series .100" pitch Receptacle Strips are a series of sockets offered in a multitude of sizes and profiles designed to satisfy most .100" pitch socket requirements. Available in Single, Dual and Triple row, they are offered in Straight, Right Angle, SMT, Bottom Entry and Pass Through PCB mounting styles. Each type has a specially designed contact system which uses a wiping mating action and produces a high normal force connection with gold, tin or selective gold plating. All are available with Standard or Hi-Temp Thermoplastic insulators. Our SMT offering is available with optional pick and place pads and tape & reel packaging.

FEATURES:

- Broad range of sizes and profiles
- Contact systems with high normal force
- Choice of contact plating
- SMT pick & place option
- Optional Tape & reel packaging

MATING CONNECTORS:

Adam Tech PH series .100" pitch pin headers and all industry standard pin headers with a .025" (0.64mm) square pin.

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL94V-0
Optional Hi-Temp insulator: Nylon 6T, rated UL94V-0
Insulator Color: Black
Contacts: Phosphor Bronze

Contact Plating:

G = Gold flash (30u" optional) over nickel underplate overall
SG = Gold flash (30u" optional) over nickel underplate on contact area, tin over copper underplate on tails.
T = Tin over copper underplate overall

Electrical:

Operating voltage: 250V AC max.
Current rating: 3 Amps max.
Contact resistance: 20 mΩ max. initial
Insulation resistance: 5000 MΩ min.
Dielectric withstanding voltage: 1000V AC for 1 minute

Mechanical:

Insertion force: 0.375 lbs per contact max.
Withdrawal force: 0.125 lbs per contact min.

Temperature Rating:

Operating temperature: -40°C to +105°C

PACKAGING:

Anti-ESD plastic trays
(Tape and Reel optional for SMT option)

SAFETY AGENCY APPROVALS:

UL Recognized & CSA Certified,
File no. E224053

**HI-TEMP
INSULATOR
AVAILABLE**



ORDERING INFORMATION

RS1

12

G

SERIES INDICATOR

- RS1** = Single row vertical mount receptacle
- RS1R** = Single row right angle mount receptacle
- RS2** = Dual row vertical mount receptacle
- RS2R** = Dual row right angle mount receptacle
- RSB** = Dual row straight PCB mount with polarization bump and keyed corner contacts
- RSBR** = Dual row right angle PCB mount with polarization bump and keyed corner contacts
- RSE1** = Single row elevated receptacle
- RSE2** = Dual row elevated receptacle
- RSM1** = Single row surface mount
- RSM2** = Dual row surface mount

PLATING

- G** = Gold plated
- T** = Tin plated
- SG** = Gold plating in contact area, Tin Plated solder tails

POSITIONS

- Single row:** 1 thru 40
- Dual row:** 2 thru 80

OPTIONS:

- Add designator(s) to end of part number
- SMT** = SMT Dual row with Hi-Temp insulator
- SMT-A** = SMT Single Row Type A with Hi-Temp insulator
- SMT-B** = SMT Single Row Type B with Hi-Temp insulator
- 30** = 30 μin gold plating in contact area
- P** = Optional guide peg on SMT version
- HT** = Hi-Temp insulator for Hi-Temp soldering processes up to 260°C (Add this option for thru-hole products only. All SMT products are manufactured with Hi-Temp insulators)

RECEPTACLE STRIPS FOUR SIDED CONTACT PAGE 309, 310 & 314

RS1B **26** **G**

SERIES INDICATOR

RS1B = Single row, vertical mount 4-sided contact receptacle strip
RS2B = Dual row, vertical mount 4-sided contact receptacle strip
RS1BR = Single row, right angle mount, 3-sided contact receptacle strip
RS2BR = Dual row, right angle mount, 3-sided contact receptacle strip

PLATING

G = Gold plated
T = Tin plated
SG = Gold plated contact area, tin plated solder tails

POSITIONS

Single row: 2 thru 40
Dual row: 4 thru 80

RECEPTACLE STRIPS LOW PROFILE PAGE 313

RS1L **34** **G**

SERIES INDICATOR

RS1L = Single row, .224" body height
RS2L = Dual row, .224" body height

PLATING

G = Gold plated
T = Tin plated

POSITIONS

Single row: 2 thru 40
Dual row: 4 thru 80

RECEPTACLE STRIPS BOTTOM, PASS THROUGH OR DUAL ENTRY PAGE 307, 315 & 316

RS2BE **A** **40** **G**

SERIES INDICATOR

RS1BE = Single row, vertical mount, bottom, pass through or dual entry receptacle strip
RS2BE = Dual row, vertical mount, bottom, pass through or dual entry receptacle strip
RS2BE-A = Dual row, with single sided footprint, vertical mount, bottom, pass through or dual entry receptacle strip

PLATING

G = Gold plated

POSITIONS

Single Row: 2 thru 40
Dual Row: 4 Thru 80

SOLDER TAIL FOOTPRINT

A = .100" x .150"
B = .100" x .200"
C = .100" x .300"
Blank = Single row

RECEPTACLE STRIPS VERY LOW PROFILE PAGE 308

RSVL **2A** **10** **G**

SERIES INDICATOR

RSVL = Vertical Mount, very low profile receptacle strip

PLATING

G = Gold plated
T = Tin plated

PROFILE / NO. OF ROWS

1A = Single row, .138" body height
1B = Single row, .205" body height
2A = Dual row, .138" body height
2B = Dual row, .205" body height

POSITIONS

Single Row: 2 Thru 36
Dual Row: 4 Thru 72



OPTIONS:

Add designator(s) to end of part number

A = Type A PCB Layout

B = Type B PCB Layout

Ordering Information pg. 307




A = .100 [2.54] X No. of Positions
B = .100 [2.54] X No. of Spaces





RSVL-1A

RSVL-1A-18-G

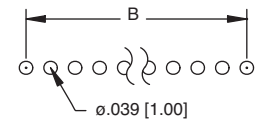

Recommended PCB Layout

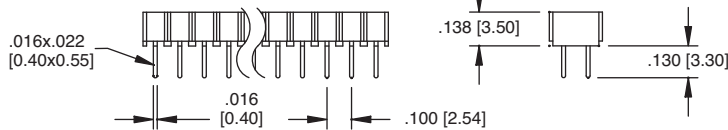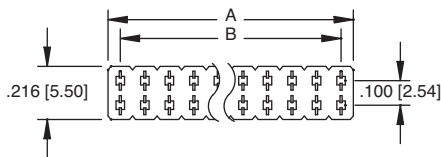


A = .100 [2.54] X No. of Positions Per Row
B = .100 [2.54] X No. of Spaces





RSVL-2A

RSVL-2A-38-G

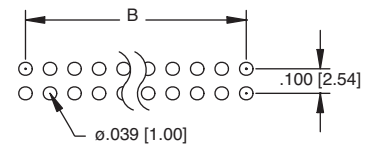

Recommended PCB Layout

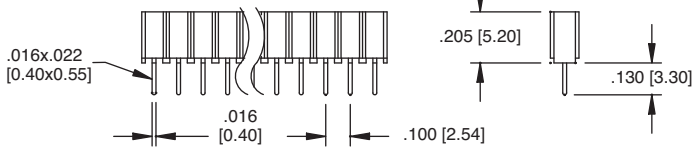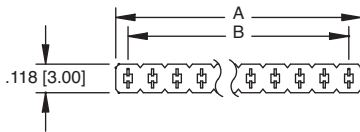


A = .100 [2.54] X No. of Positions
B = .100 [2.54] X No. of Spaces





RSVL-1B

RSVL-1B-18-G



Recommended PCB Layout

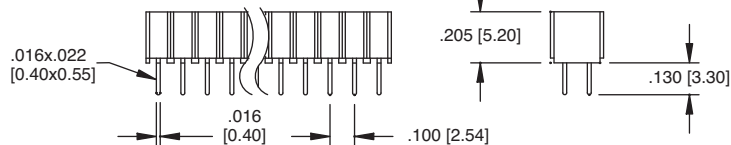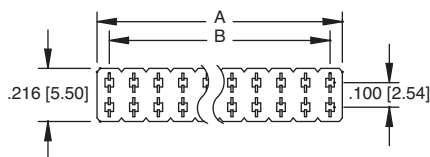


A = .100 [2.54] X No. of Positions Per Row
B = .100 [2.54] X No. of Spaces



RSVL-2B


RSVL-2B-36-G





Recommended PCB Layout

Ordering Information pg. 306


RS1

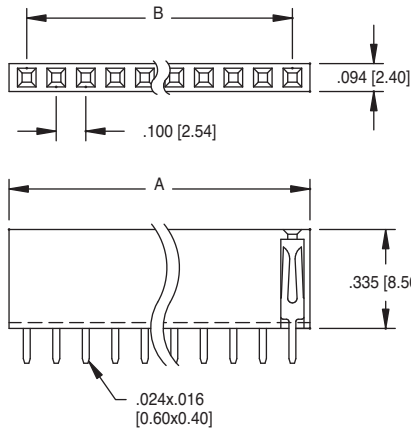


A = .100 [2.54] X No. of Positions +.020 [0.50]
 B = .100 [2.54] X No. of Spaces

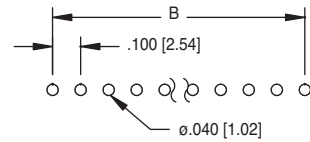



Recommended PCB Layout




RS1-12-G

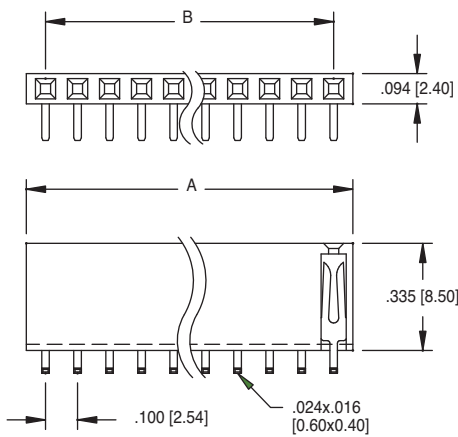


A = .100 [2.54] X No. of Positions +.020 [0.50]
 B = .100 [2.54] X No. of Spaces





Recommended PCB Layout



RS1R-09-G

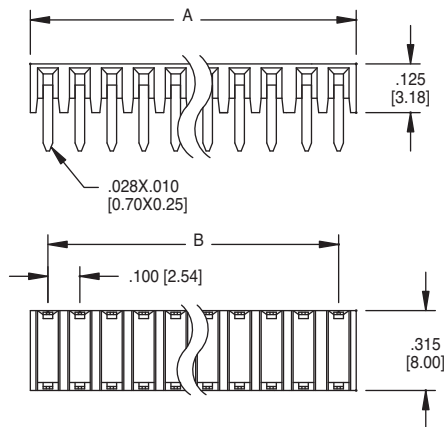

A = .100 [2.54] X No. of Positions
 B = .100 [2.54] X No. of Spaces

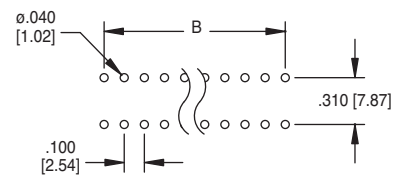





Recommended PCB Layout




RS1BR-13-G

Ordering Information pg. 306

RS2

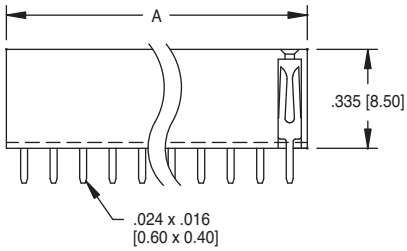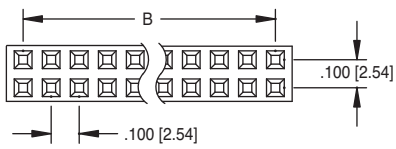





RS2-24-G

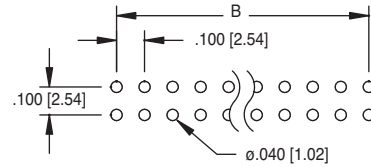


Recommended PCB Layout

A = .100 [2.54] x No. of Positions per row +.020 [0.50]
B = .100 [2.54] x No. of Spaces

RS2R

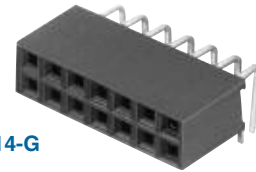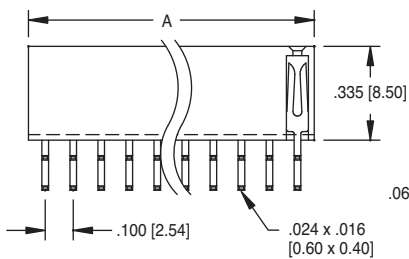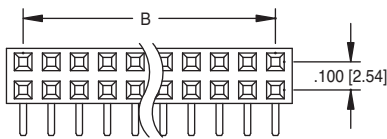





RS2R-14-G

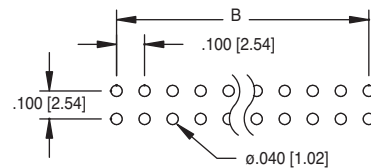


Recommended PCB Layout

A = .100 [2.54] x No. of Positions per row +.020 [0.50]
B = .100 [2.54] x No. of Spaces

RS2BR

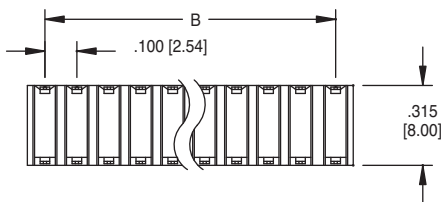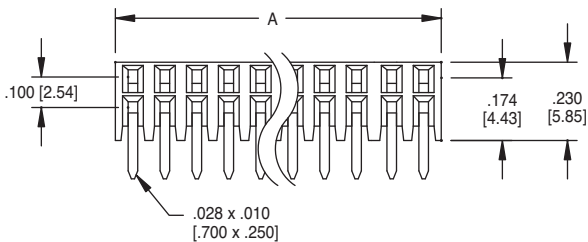

RS2BR-28-G


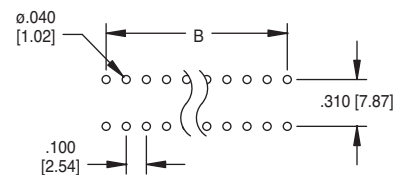


Recommended PCB Layout



A = .100 [2.54] x No. of Positions per row
B = .100 [2.54] x No. of Spaces

Ordering Information pg. 306


RSM1




RSM1-10-SG-SMT-A

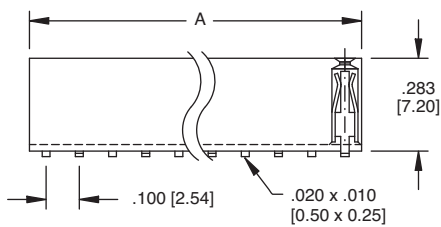

A = .100 [2.54] x No. of Positions
B = .100 [2.54] x No. of Spaces

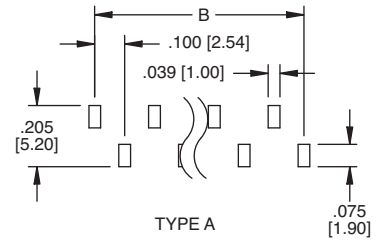


Recommended PCB Layout


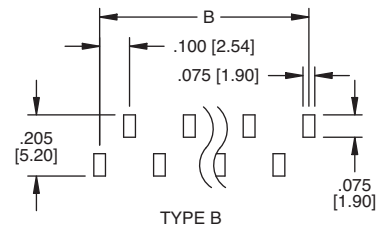


Recommended PCB Layout


RSM2

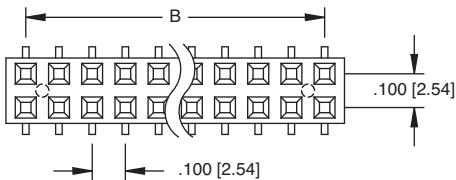

RSM2-20-SG-SMT

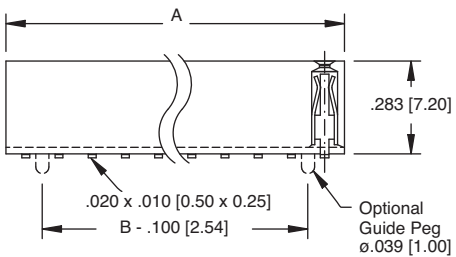



A = .100 [2.54] x No. of Positions per row
B = .100 [2.54] x No. of Spaces

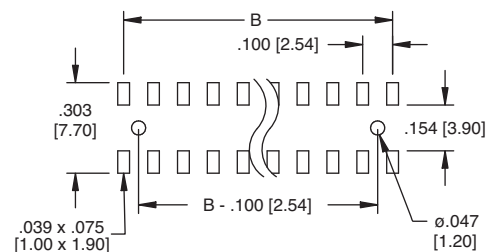




Recommended PCB Layout

Ordering Information pg. 306

RSB

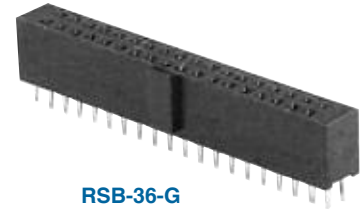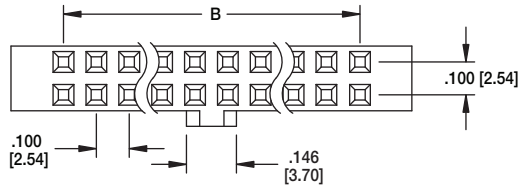


RSB-36-G

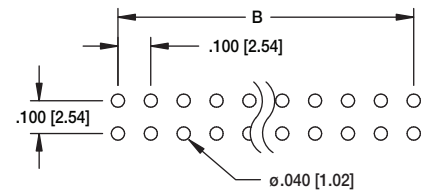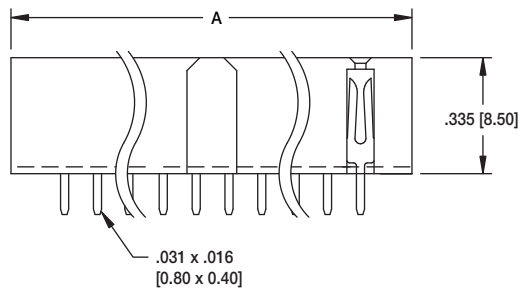




Recommended PCB Layout

A = .100 [2.54] X No. of Positions + .300 [7.62]
 B = .100 [2.54] X No. of Spaces

RSBR

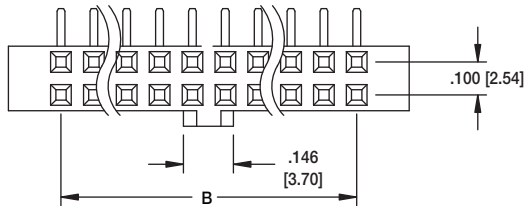

RSBR-36-G

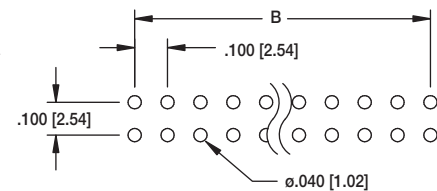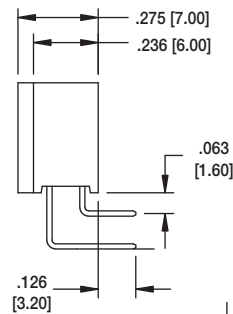
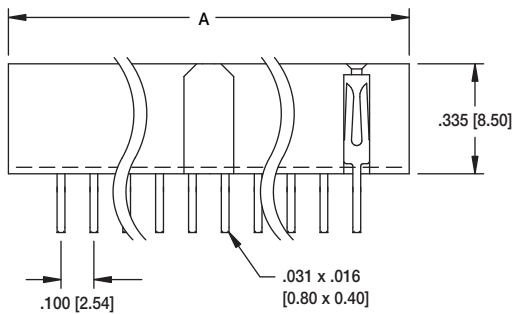


Recommended PCB Layout

A = .100 [2.54] x No. of Positions + .300 [7.62]
 B = .100 [2.54] x No. of Spaces


RS1L

Ordering Information pg. 307

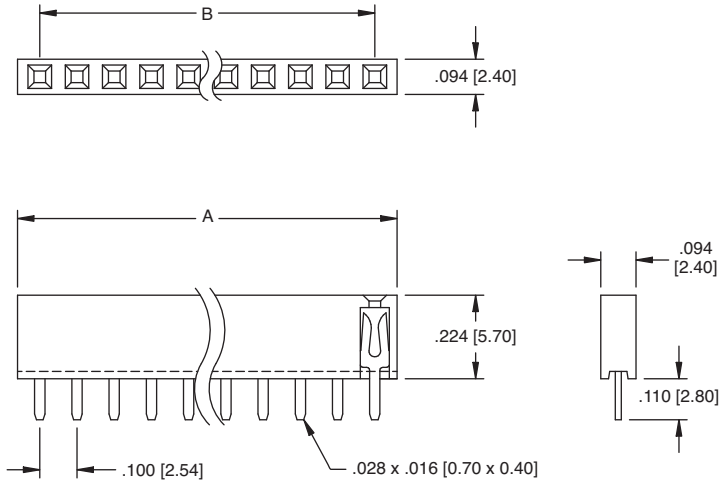



RS1L-10-G

A = .100 [2.54] x No. of Positions
 B = .100 [2.54] x No. of Spaces




Recommended PCB Layout

RS2L

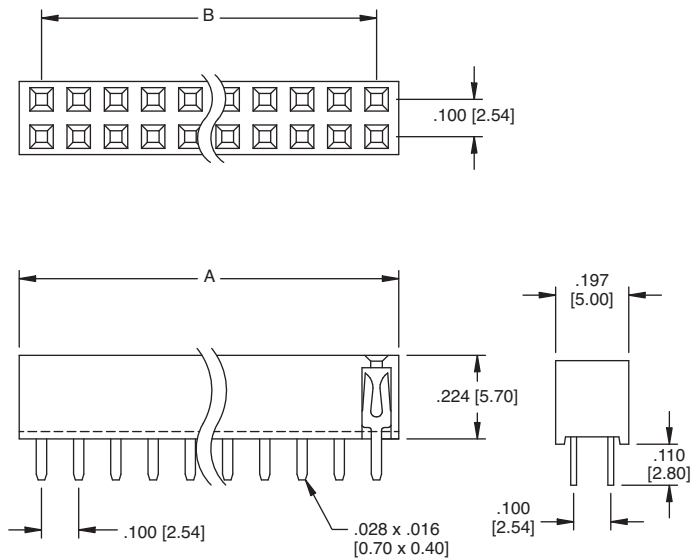

RS2L-20-G


A = .100 [2.54] x No. of Positions per row
 B = .100 [2.54] x No. of Spaces

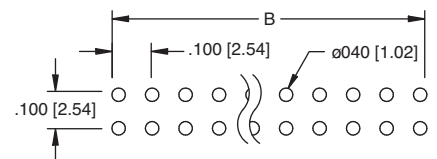


Recommended PCB Layout

Ordering Information pg. 307


RS1B

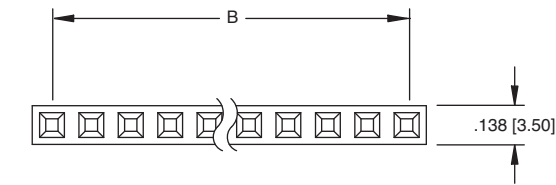

RS1B-10-SG


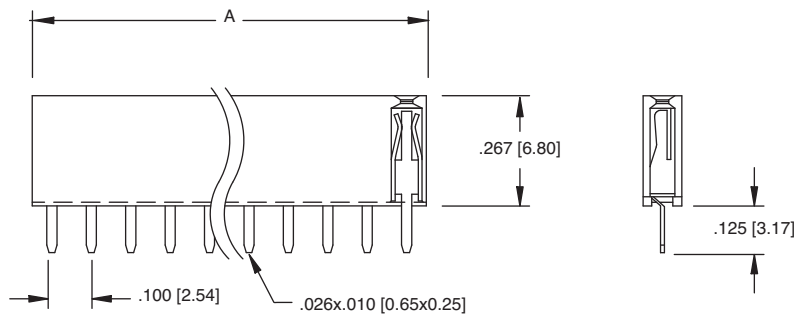


A = .100 [2.54] X No. of Positions
B = .100 [2.54] X No. of Spaces




Recommended PCB Layout


RS2B

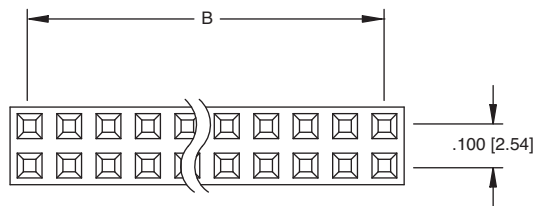

RS2B-20-SG

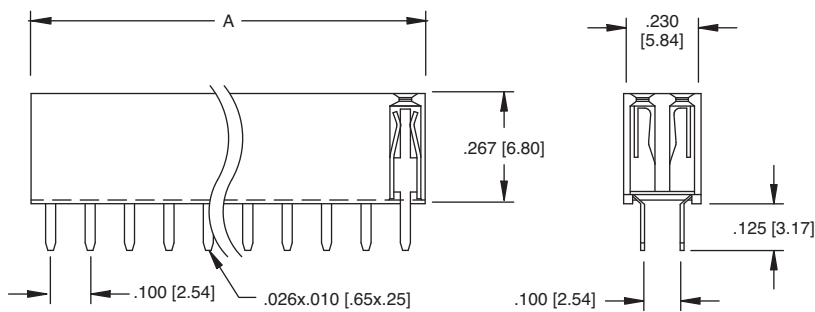



A = .100 [2.54] X No. of Positions per row
B = .100 [2.54] X No. of Spaces

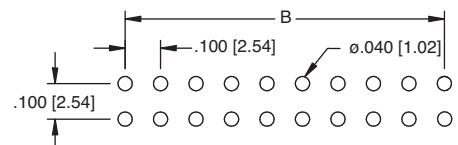



Recommended PCB Layout

Ordering Information pg. 307



RS1BE-A/B

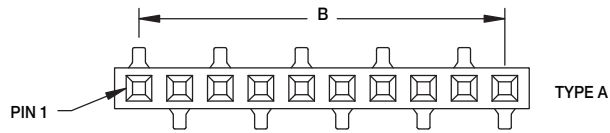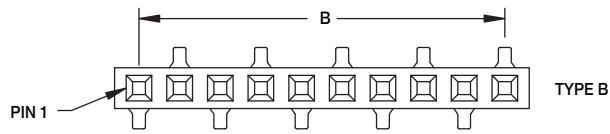

RS1BE-B-10-SG-A

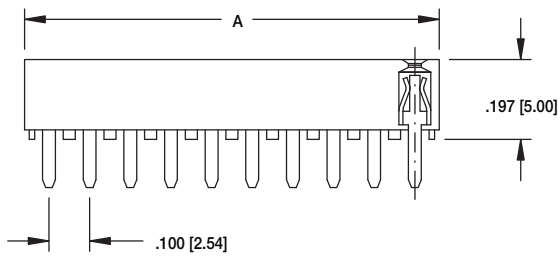


A = .100 [2.54] X No. of Positions
B = .100 [2.54] X No. of Spaces

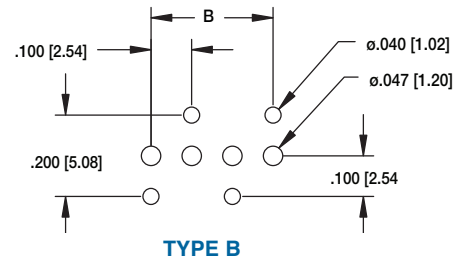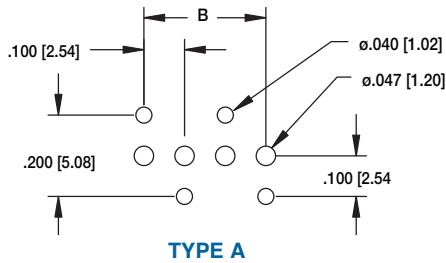

Recommended PCB Layouts




RS1BE

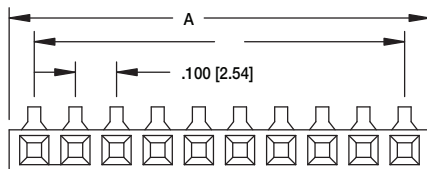

A = .100 [2.54] X No. of Positions
B = .100 [2.54] X No. of Spaces




RS1BE-10-SG

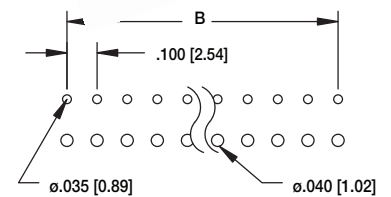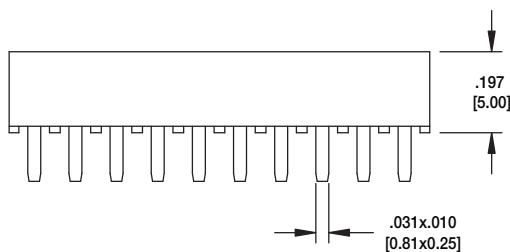


Recommended PCB Layout

Ordering Information pg. 307

**RS2BE-A
TOP ENTRY**




RS2BE-A-28-G

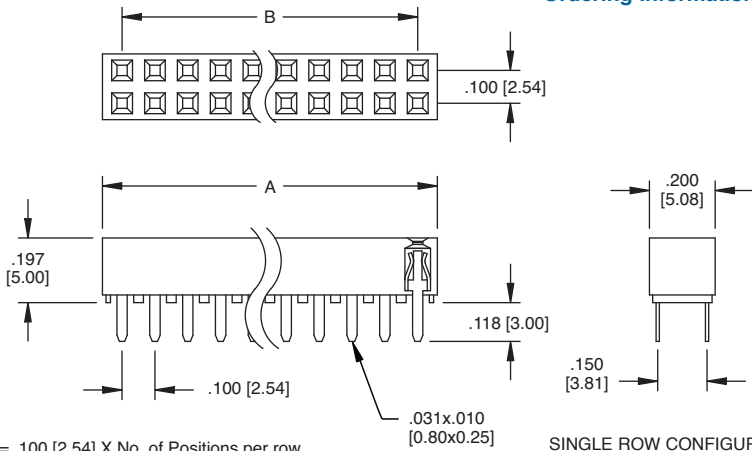


A = .100 [2.54] X No. of Positions per row
B = .100 [2.54] X No. of Spaces

SINGLE ROW CONFIGURATION
ALSO AVAILABLE

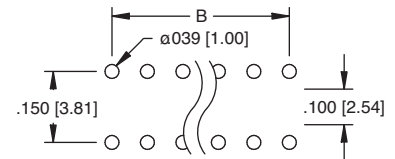


Recommended PCB Layout

**RS2BE-B
TOP OR BOTTOM
ENTRY**




RS2BE-B-26-G

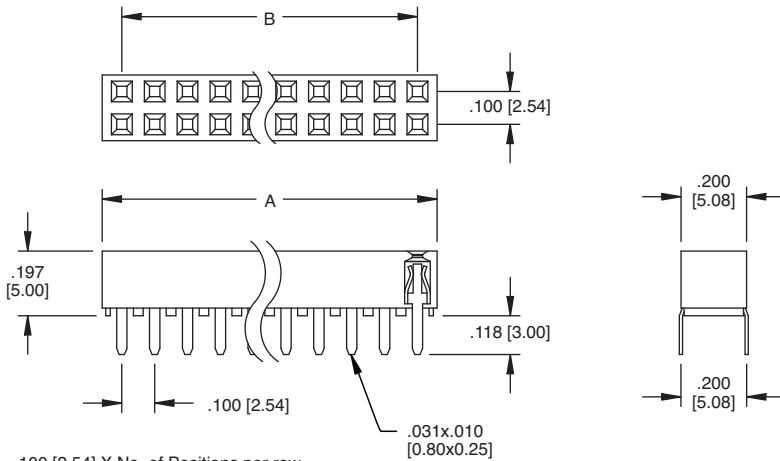

A = .100 [2.54] X No. of Positions per row
B = .100 [2.54] X No. of Spaces

SINGLE ROW CONFIGURATION
ALSO AVAILABLE

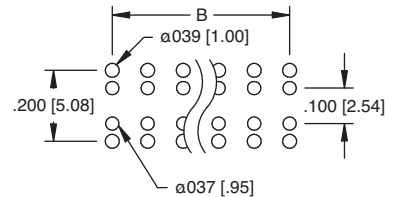


Recommended PCB Layout

**RS2BE-C
TOP OR BOTTOM
ENTRY**




RS2BE-C-30-G

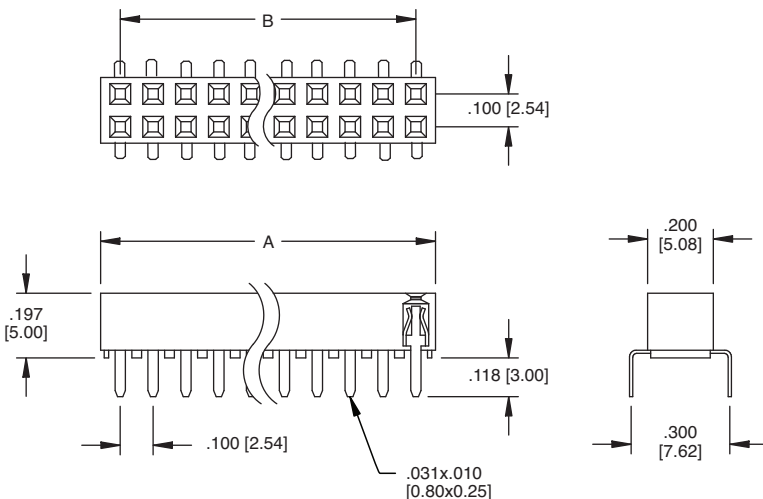

A = .100 [2.54] X No. of Positions per row
B = .100 [2.54] X No. of Spaces

SINGLE ROW CONFIGURATION
ALSO AVAILABLE

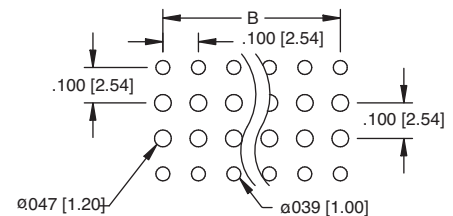

Recommended PCB Layout

A = .100" [2.54] x No. of positions
B = .100" [2.54] x No. of spaces

RSE1

RSE1-3-20-SG-3

Recommended PCB Layout

A = .100" [2.54] x No. of positions per row
B = .100" [2.54] x No. of spaces

RSE2

RSE2-3-40-SG-3

Recommended PCB Layout

ORDERING INFORMATION

RSE1

2

20

SG

1

SERIES INDICATOR
RSE1 = Single row, vertical elevated socket strip
RSE2 = Dual row, vertical elevated socket strip

POSITIONS
Single Row 01 thru 40
Dual Row 02 thru 80

HEIGHT
1 = .433 [11.00]
2 = .531 [13.50]
3 = .630 [16.00]

PLATING
SG = Selective Gold Plating in contact area, Tin Plated tails
T = Tin Plated

PIN LENGTH Dim. D
See chart Dim.D

PART NUMBER	INSULATORS	DIM. C	DIM. D
RSEX-1-XX-SG-1	1	.433 [11.00]	.118 [3.00]
RSEX-1-XX-SG-2	1	.433 [11.00]	.315 [8.00]
RSEX-1-XX-SG-3	1	.433 [11.00]	.448 [11.40]
RSEX-2-XX-SG-1	2	.531 [13.50]	.216 [5.50]
RSEX-3-XX-SG-1	3	.635 [16.12]	.118 [3.00]
RSEX-3-XX-SG-2	3	.635 [16.12]	.252 [6.40]

*Replace "X" with "1" for single row or "2" for double row.
*Replace "XX" with total number of positions.