

# 3 MHz, 2 A Fixed-Frequency Synchronous Buck Converter

High Efficiency, Low Ripple, Adjustable Output Voltage

## NCP6354

The NCP6354, a synchronous buck converter, which is optimized to supply the different sub systems of portable applications powered by one cell Li-ion or three cell Alkaline/NiCd/NiMH batteries. The device is able to deliver up to 2 A on an external adjustable voltage. Operation with 3 MHz switching frequency allows employing small size inductor and capacitors. Input supply voltage feedforward control is employed to deal with wide input voltage range. Synchronous rectification offers improved system efficiency. The NCP6354 is in a space saving, low profile 2.0x2.0x0.75 mm WDFN-8 package.

### Features

- 2.3 V to 5.5 V Input Voltage Range
- External Adjustable Voltage
- Up to 2 A Output Current
- 3 MHz Switching Frequency
- Synchronous Rectification
- Enable Input
- Power Good Output
- Soft Start
- Over Current Protection
- Active Discharge when Disabled
- Thermal Shutdown Protection
- WDFN-8, 2x2 mm, 0.5 mm Pitch Package
- Maximum 0.8 mm Height for Super Thin Applications
- These are Pb-Free Devices

### Typical Applications

- Cellular Phones, Smart Phones, and PDAs
- Portable Media Players
- Digital Still Cameras
- Wireless and DSL Modems
- USB Powered Devices
- Point of Load
- Game and Entertainment System




ON Semiconductor®

[www.onsemi.com](http://www.onsemi.com)



WDFN8  
CASE 511BE


### MARKING DIAGRAM



A2 = Specific Device Code  
M = Date Code  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

### BLOCK DIAGRAM

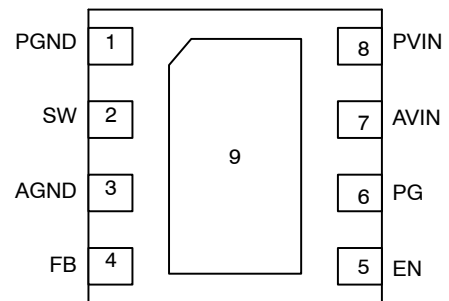


(Top View)

### ORDERING INFORMATION

See detailed ordering, marking and shipping information in the package dimensions section on page 14 of this data sheet.

## NCP6354

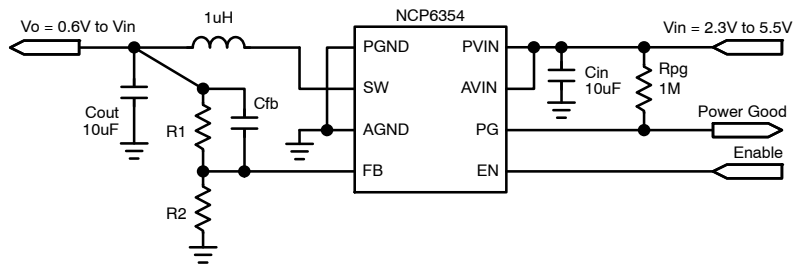

**Figure 1. Typical Application Circuit**

### PIN DESCRIPTION

| Pin | Name | Type           | Description  |
|-----|------|----------------|--|
| 1   | PGND | Power Ground   | Power Ground for power, analog blocks. Must be connected to the system ground.   |
| 2   | SW   | Power Output   | Switch Power pin connects power transistors to one end of the inductor.  |
| 3   | AGND | Analog Ground  | Analog Ground analog and digital blocks. Must be connected to the system ground.   |
| 4   | FB   | Analog Input   | Feedback Voltage from the buck converter output. This is the input to the error amplifier. This pin is connected to the resistor divider network between the output and AGND.  |
| 5   | EN   | Digital Input  | Enable of the IC. High level at this pin enables the device. Low level at this pin disables the device.  |
| 6   | PG   | Digital Output | PG pin is for NCP6354 with Power Good option. It is open drain output. Low level at this pin indicates the device is not in power good, while high impedance at this pin indicates the device is in power good.                      |
| 7   | AVIN | Analog Input   | Analog Supply. This pin is the analog and the digital supply of the device. An optional 1 $\mu$ F or larger ceramic capacitor bypasses this input to the ground. This capacitor should be placed as close as possible to this input. |
| 8   | PVIN | Power Input    | Power Supply Input. This pin is the power supply of the device. A 10 $\mu$ F or larger ceramic capacitor must bypass this input to the ground. This capacitor should be placed as close a possible to this input.                    |
| 9   | PAD  | Exposed Pad    | Exposed Pad. Must be soldered to system ground to achieve power dissipation performances. This pin is internally unconnected   |

# NCP6354

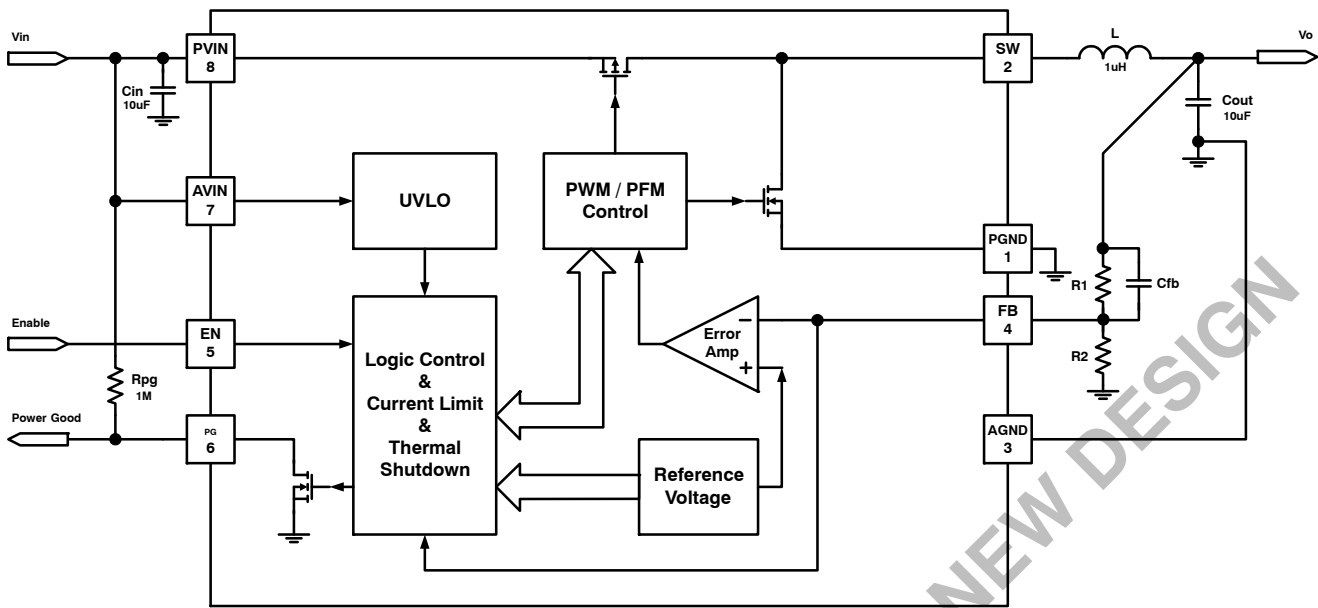


Figure 2. Functional Block Diagram.

## MAXIMUM RATINGS

| Rating   | Symbol               | Value |      | Unit |
|--|----------------------|-------|------|------|
|  |                      | Min   | Max  |      |
| Input Supply Voltage to GND                      | $V_{PVIN}, V_{AVIN}$ | -0.3  | 7.0  | V    |
| Switch Node to GND                               | $V_{SW}$             | -0.3  | 7.0  | V    |
| EN, PG to GND                                    | $V_{EN}, V_{PG}$     | -0.3  | 7.0  | V    |
| FB to GND  | $V_{FB}$             | -0.3  | 2.5  | V    |
| Human Body Model (HBM) ESD Rating are (Note 1)   | ESD HBM              |       | 2000 | V    |
| Machine Model (MM) ESD Rating (Note 1)           | ESD MM               |       | 200  | V    |
| Latchup Current (Note 2)                         | $I_{LU}$             | -100  | 100  | mA   |
| Operating Junction Temperature Range (Note 3)    | $T_J$                | -40   | 125  | °C   |
| Operating Ambient Temperature Range              | $T_A$                | -40   | 85   | °C   |
| Storage Temperature Range                        | $T_{STG}$            | -55   | 150  | °C   |
| Thermal Resistance Junction-to-Top Case (Note 4) | $R_{\theta JC}$      | 12    |      | °C/W |
| Thermal Resistance Junction-to-Board (Note 4)    | $R_{\theta JB}$      | 30    |      | °C/W |
| Thermal Resistance Junction-to-Ambient (Note 4)  | $R_{\theta JA}$      | 62    |      | °C/W |
| Power Dissipation (Note 5)                       | $P_D$                | 1.6   |      | W    |
| Moisture Sensitivity Level (Note 6)              | MSL                  | 1     |      | -    |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. This device series contains ESD protection and passes the following tests:

Human Body Model (HBM)  $\pm 2.0$  kV per JEDEC standard: JESD22-A114.

Machine Model (MM)  $\pm 200$  V per JEDEC standard: JESD22-A115.

2. Latchup Current per JEDEC standard: JESD78 Class II.

3. The thermal shutdown set to 150°C (typical) avoids potential irreversible damage on the device due to power dissipation.

4. The thermal resistance values are dependent of the PCB heat dissipation. Board used to drive these data was an 80 x 50mm NCP6334EVB board. It is a multilayer board with 1-ounce internal power and ground planes and 2-ounce copper traces on top and bottom of the board. If the copper traces of top and bottom are 1-ounce too,  $R_{\theta JC} = 11^\circ\text{C/W}$ ,  $R_{\theta JB} = 30^\circ\text{C/W}$ , and  $R_{\theta JA} = 72^\circ\text{C/W}$ .

5. The maximum power dissipation ( $P_D$ ) is dependent on input voltage, maximum output current and external components selected.

6. Moisture Sensitivity Level (MSL): 1 per IPC/JEDEC standard: J-STD-020A.

# NCP6354

## ELECTRICAL CHARACTERISTICS

( $V_{IN} = 3.6\text{ V}$ ,  $V_{OUT} = 1.8\text{ V}$ ,  $L = 1\text{ }\mu\text{H}$ ,  $C = 10\text{ }\mu\text{F}$ , typical values are referenced to  $T_J = 25^\circ\text{C}$ , Min and Max values are referenced to  $T_J$  up to  $125^\circ\text{C}$ . unless other noted.)

| Characteristics | Test Conditions | Symbol | Min | Typ | Max | Unit |
|-----------------|-----------------|--------|-----|-----|-----|------|
|-----------------|-----------------|--------|-----|-----|-----|------|

### SUPPLY VOLTAGE

|                              |          |          |     |   |     |   |
|------------------------------|----------|----------|-----|---|-----|---|
| Input Voltage $V_{IN}$ Range | (Note 9) | $V_{IN}$ | 2.3 | – | 5.5 | V |
|------------------------------|----------|----------|-----|---|-----|---|

### SUPPLY CURRENT

|                                   |                  |          |   |   |   |               |
|-----------------------------------|------------------|----------|---|---|---|---------------|
| $V_{IN}$ Quiescent Supply Current | EN high, no load | $I_Q$    | – | 5 | – | mA            |
| $V_{IN}$ Shutdown Current         | EN low           | $I_{SD}$ | – | – | 1 | $\mu\text{A}$ |

### OUTPUT VOLTAGE

|                               |  |           |     |      |          |     |
|-------------------------------|--|-----------|-----|------|----------|-----|
| Output Voltage Range          | (Note 7)   | $V_{OUT}$ | 0.6 | –    | $V_{IN}$ | V   |
| FB Voltage                    |  | $V_{FB}$  | 594 | 600  | 606      | mV  |
| FB Voltage in Load Regulation | $V_{IN} = 3.6\text{ V}$ , $I_{OUT}$ from 200 mA to $I_{OUTMAX}$ . (Note 7)                                     |           | –   | –0.5 | –        | %/A |
| FB Voltage in Line Regulation | $I_{OUT} = 200\text{ mA}$ , $V_{IN}$ from $\text{MAX}(V_{NOM} + 0.5\text{ V}, 2.3\text{ V})$ to 5.5 V (Note 7) |           | –   | 0    | –        | %/V |
| Maximum Duty Cycle            | (Note 7)   | $D_{MAX}$ | –   | 100  | –        | %   |

### OUTPUT CURRENT

|                           |          |              |     |     |     |   |
|---------------------------|----------|--------------|-----|-----|-----|---|
| Output Current Capability | (Note 7) | $I_{OUTMAX}$ | 2.0 | –   | –   | A |
| Output Peak Current Limit |          | $I_{LIM}$    | 2.3 | 2.8 | 3.3 | A |

### VOLTAGE MONITOR

|                                     |  |             |    |      |     |               |
|-------------------------------------|--|-------------|----|------|-----|---------------|
| $V_{IN}$ UVLO Falling Threshold     |  | $V_{INUV-}$ | –  | –    | 2.3 | V             |
| $V_{IN}$ UVLO Hysteresis            |  | $V_{INHYS}$ | 60 | –    | 200 | mV            |
| Power Good Low Threshold            | $V_{OUT}$ falls down to cross the threshold (percentage of FB voltage)   | $V_{PGL}$   | 87 | 90   | 92  | %             |
| Power Good Hysteresis               | $V_{OUT}$ rises up to cross the threshold (percentage of Power Good Low Threshold ( $V_{PGL}$ ) voltage)         | $V_{PGHYS}$ | 0  | 3    | 5   | %             |
| Power Good High Delay in Start Up   | From EN rising edge to PG going high.  | $T_{dPGH1}$ | –  | 1.15 | –   | ms            |
| Power Good Low Delay in Shut Down   | From EN falling edge to PG going low. (Note 7)   | $T_{dPGL1}$ | –  | 8    | –   | $\mu\text{s}$ |
| Power Good High Delay in Regulation | From $V_{FB}$ going higher than 95% nominal level to PG going high. Not for the first time in start up. (Note 7) | $T_{dPGH}$  | –  | 5    | –   | $\mu\text{s}$ |
| Power Good Low Delay in Regulation  | From $V_{FB}$ going lower than 90% nominal level to PG going low. (Note 7)                                       | $T_{dPGL}$  | –  | 8    | –   | $\mu\text{s}$ |
| Power Good Pin Low Voltage          | Voltage at PG pin with 5mA sink current  | $V_{PG\_L}$ | –  | –    | 0.3 | V             |
| Power Good Pin Leakage Current      | 3.6 V at PG pin when power good valid  | $PG\_LK$    | –  | –    | 100 | nA            |

### INTEGRATED MOSFETS

|                                |  |             |   |            |          |                  |
|--------------------------------|--|-------------|---|------------|----------|------------------|
| High-Side MOSFET ON Resistance | $V_{IN} = 3.6\text{ V}$ (Note 8)<br>$V_{IN} = 5\text{ V}$ (Note 8) | $R_{ON\_H}$ | – | 140<br>130 | 200<br>– | $\text{m}\Omega$ |
| Low-Side MOSFET ON Resistance  | $V_{IN} = 3.6\text{ V}$ (Note 8)<br>$V_{IN} = 5\text{ V}$ (Note 8) | $R_{ON\_L}$ | – | 110<br>100 | 140<br>– | $\text{m}\Omega$ |

### SWITCHING FREQUENCY

|                     |  |     |     |     |     |     |
|---------------------|--|-----|-----|-----|-----|-----|
| Operation Frequency |  | FSW | 2.7 | 3.0 | 3.3 | MHz |
|---------------------|--|-----|-----|-----|-----|-----|

7. Guaranteed by design, not tested in production.

8. Maximum value applies for  $T_J = 85^\circ\text{C}$ .

9. Operation above 5.5 V input voltage for extended periods may affect device reliability.

# NCP6354

## ELECTRICAL CHARACTERISTICS

( $V_{IN} = 3.6\text{ V}$ ,  $V_{OUT} = 1.8\text{ V}$ ,  $L = 1\ \mu\text{H}$ ,  $C = 10\ \mu\text{F}$ , typical values are referenced to  $T_J = 25^\circ\text{C}$ , Min and Max values are referenced to  $T_J$  up to  $125^\circ\text{C}$ . unless other noted.)

| Characteristics | Test Conditions | Symbol | Min | Typ | Max | Unit |
|-----------------|-----------------|--------|-----|-----|-----|------|
|-----------------|-----------------|--------|-----|-----|-----|------|

### SOFT START

|                 |  |     |   |     |   |    |
|-----------------|--|-----|---|-----|---|----|
| Soft-Start Time | Time from EN to 90% of output voltage target | TSS | – | 0.4 | 1 | ms |
|-----------------|--|-----|---|-----|---|----|

### CONTROL LOGIC

|                           |  |          |     |     |     |               |
|---------------------------|--|----------|-----|-----|-----|---------------|
| EN Input High Voltage     |  | VEN_H    | 1.1 | –   | –   | V             |
| EN Input Low Voltage      |  | VEN_L    | –   | –   | 0.4 | V             |
| EN Input Hysteresis       |  | VEN_HYS  | –   | 270 | –   | mV            |
| Enable Input Bias Current |  | IEN_BIAS |     | 0.1 | 1   | $\mu\text{A}$ |

### OUTPUT ACTIVE DISCHARGE

|                                      |                 |       |    |     |     |          |
|--------------------------------------|-----------------|-------|----|-----|-----|----------|
| Internal Output Discharge Resistance | from SW to PGND | R_DIS | 75 | 500 | 700 | $\Omega$ |
|--------------------------------------|-----------------|-------|----|-----|-----|----------|

### THERMAL SHUTDOWN

|                             |  |         |   |     |   |                  |
|-----------------------------|--|---------|---|-----|---|------------------|
| Thermal Shutdown Threshold  |  | TSD     | – | 150 | – | $^\circ\text{C}$ |
| Thermal Shutdown Hysteresis |  | TSD_HYS | – | 25  | – | $^\circ\text{C}$ |

DEVICE NOT RECOMMENDED FOR NEW DESIGN

TYPICAL OPERATING CHARACTERISTICS

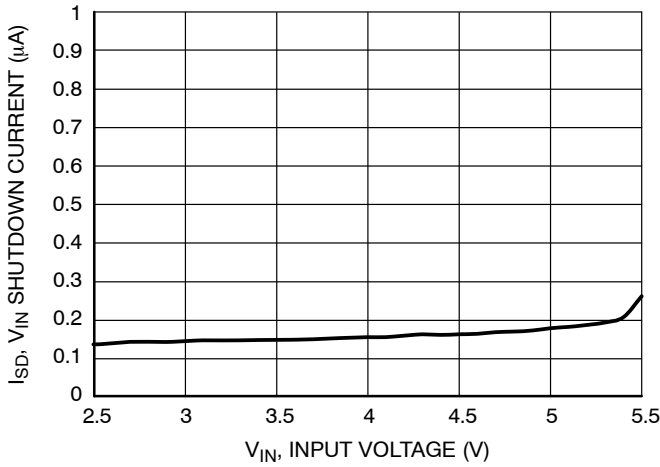


Figure 3. Standby Current vs. Input Voltage  
(EN = Low, T<sub>A</sub> = 25°C)

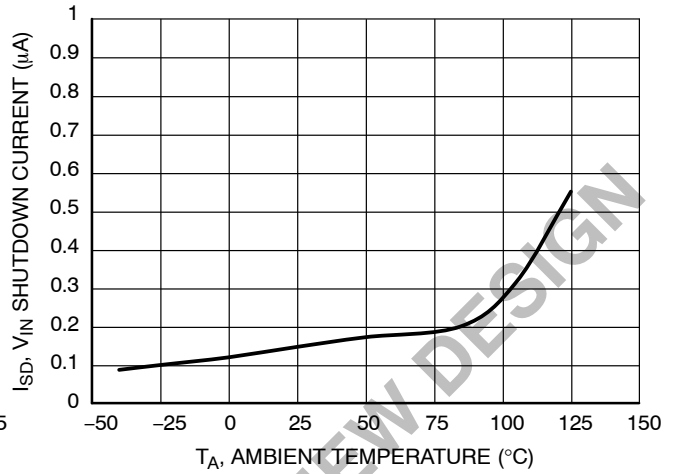


Figure 4. Standby Current vs. Temperature  
(EN = Low, V<sub>IN</sub> = 3.6 V)

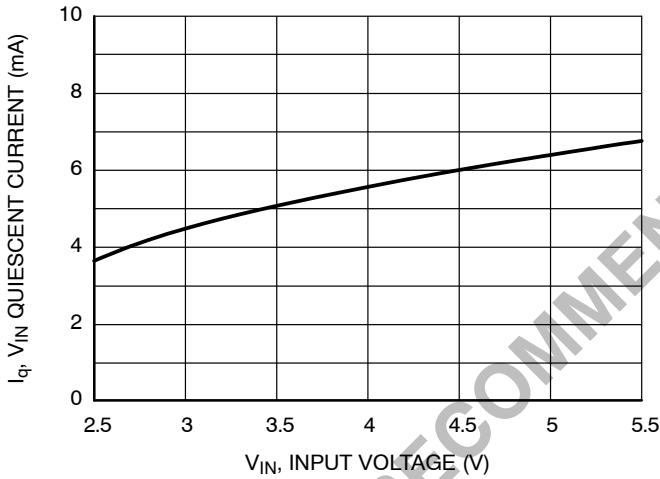


Figure 5. Quiescent Current vs. Input Voltage  
(EN = High, Open Loop, V<sub>OUT</sub> = 1.8V,  
T<sub>A</sub> = 25°C)

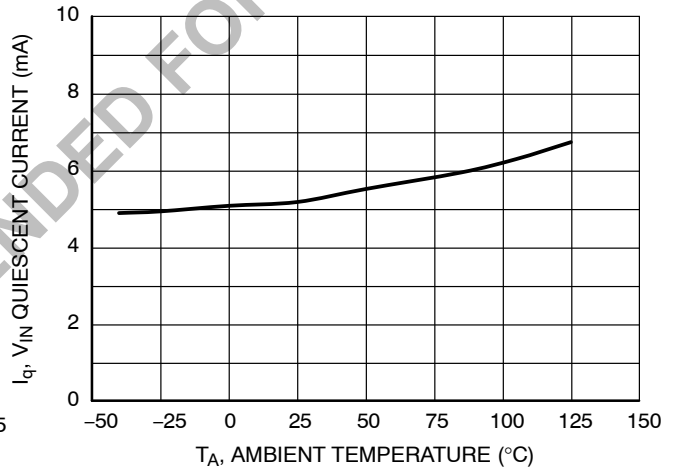


Figure 6. Quiescent Current vs. Temperature  
(EN = High, Open Loop, V<sub>OUT</sub> = 1.8 V,  
V<sub>IN</sub> = 3.6 V)

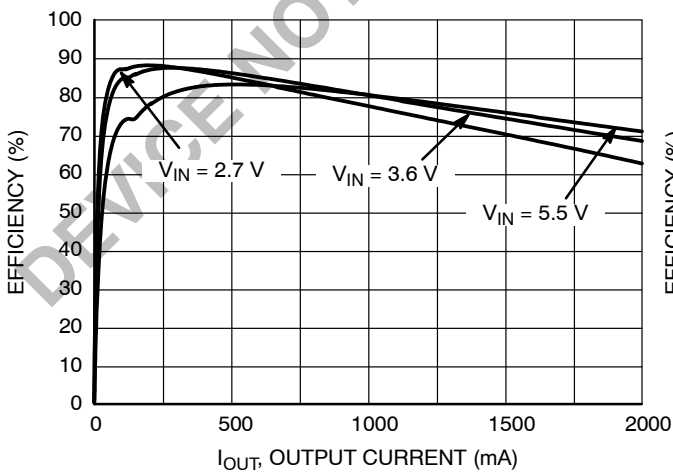


Figure 7. Efficiency vs. Output Current and  
Input Voltage (V<sub>OUT</sub> = 1.05 V, T<sub>A</sub> = 25°C)

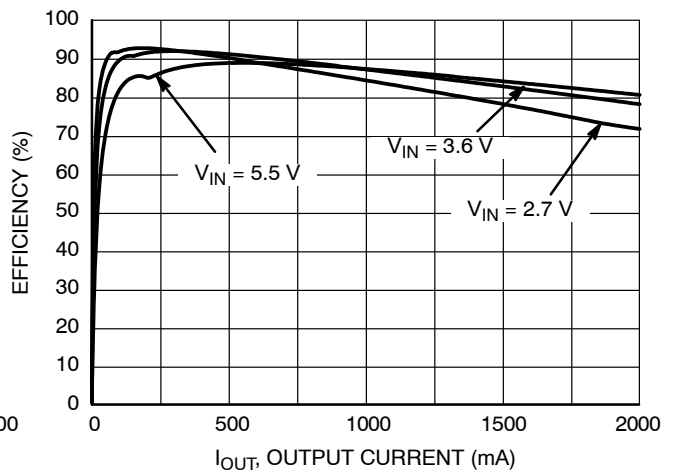


Figure 8. Efficiency vs. Output Current and  
Input Voltage (V<sub>OUT</sub> = 1.8 V, T<sub>A</sub> = 25°C)

TYPICAL OPERATING CHARACTERISTICS

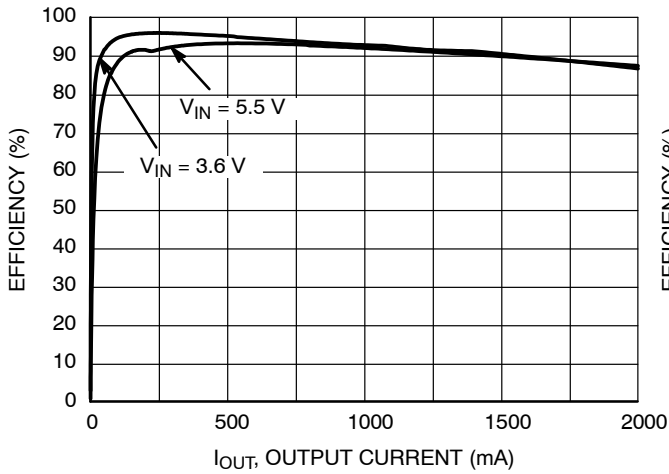


Figure 9. Efficiency vs. Output Current and Input Voltage ( $V_{OUT} = 3.3\text{ V}$ ,  $T_A = 25^\circ\text{C}$ )

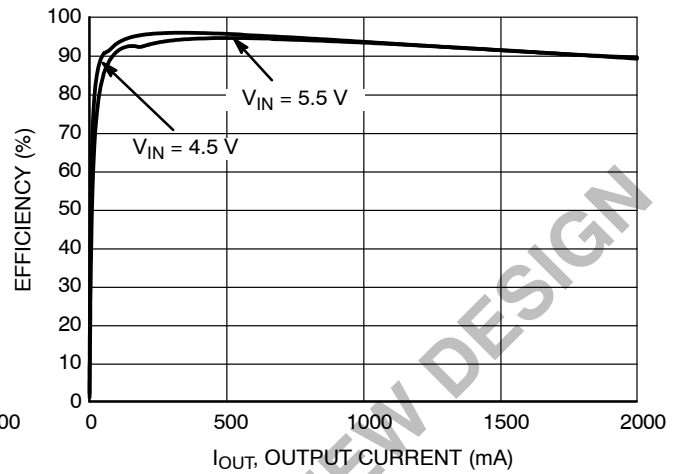


Figure 10. Efficiency vs. Output Current and Input Voltage ( $V_{OUT} = 4\text{ V}$ ,  $T_A = 25^\circ\text{C}$ )

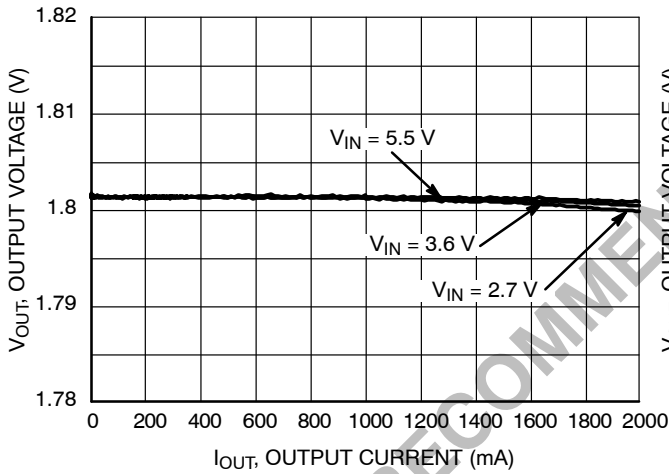


Figure 11. Load Regulation vs. Output Current and Input Voltage ( $V_{OUT} = 1.8\text{ V}$ ,  $T_A = 25^\circ\text{C}$ )

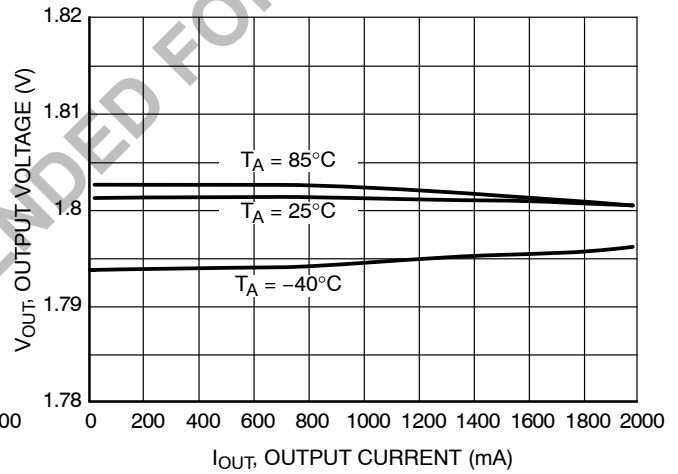


Figure 12. Load Regulation vs. Output Current and Temperature ( $V_{IN} = 3.6\text{ V}$ ,  $V_{OUT} = 1.8\text{ V}$ )

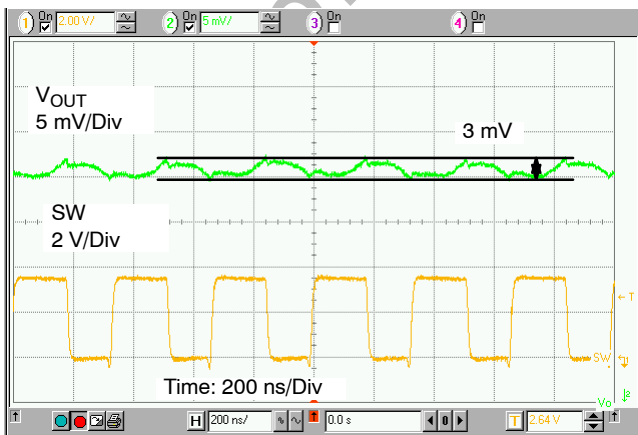


Figure 13. Output Ripple Voltage ( $V_{IN} = 3.6\text{ V}$ ,  $V_{OUT} = 1.8\text{ V}$ ,  $I_{OUT} = 1\text{ A}$ ,  $L = 1.0\text{ }\mu\text{H}$ ,  $C_{OUT} = 10\text{ }\mu\text{F}$ )

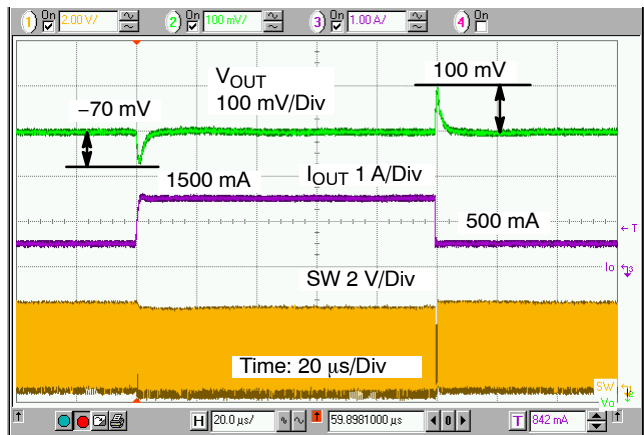


Figure 14. Load Transient Response ( $V_{IN} = 3.6\text{ V}$ ,  $V_{OUT} = 1.8\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$  to  $1500\text{ mA}$ ,  $L = 1.0\text{ }\mu\text{H}$ ,  $C_{OUT} = 10\text{ }\mu\text{F}$ )

TYPICAL OPERATING CHARACTERISTICS

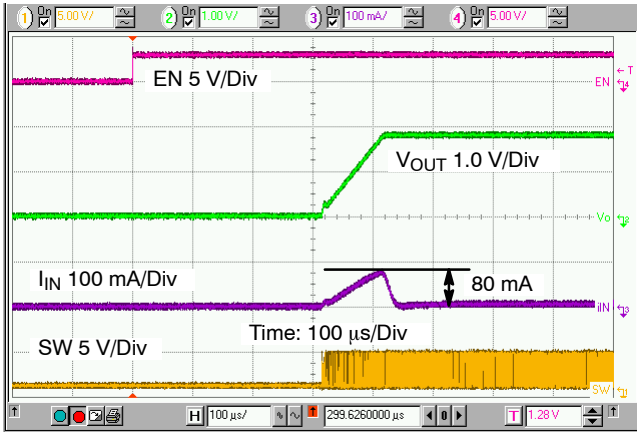


Figure 15. Power Up Sequence and Inrush Current in Input ( $V_{IN} = 3.6\text{ V}$ ,  $V_{OUT} = 1.8\text{ V}$ ,  $I_{OUT} = 0\text{ A}$ ,  $L = 1.0\text{ }\mu\text{H}$ ,  $C_{OUT} = 10\text{ }\mu\text{F}$ )

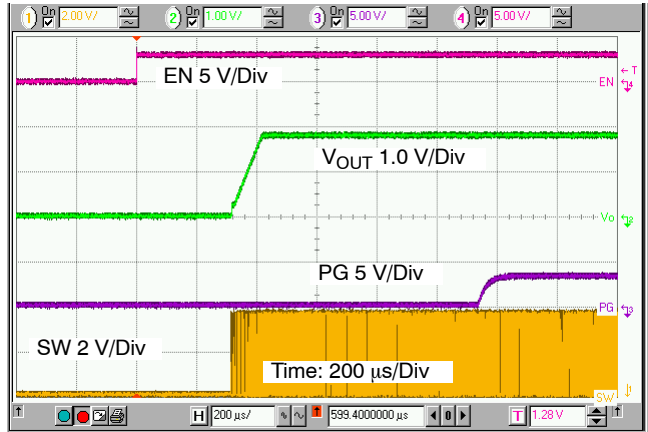


Figure 16. Power Up Sequence and Power Good ( $V_{IN} = 3.6\text{ V}$ ,  $V_{OUT} = 1.8\text{ V}$ ,  $I_{OUT} = 0\text{ A}$ ,  $L = 1.0\text{ }\mu\text{H}$ ,  $C_{OUT} = 10\text{ }\mu\text{F}$ )

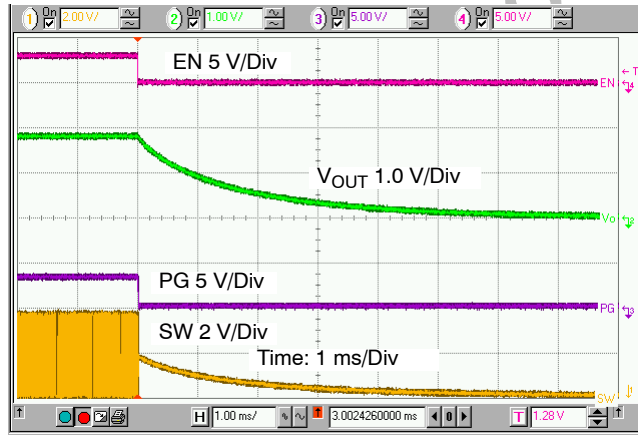


Figure 17. Power Down Sequence and Active Output Discharge ( $V_{IN} = 3.6\text{ V}$ ,  $V_{OUT} = 1.8\text{ V}$ ,  $I_{OUT} = 0\text{ A}$ ,  $L = 1.0\text{ }\mu\text{H}$ ,  $C_{OUT} = 10\text{ }\mu\text{F}$ )



DETAILED DESCRIPTION

**General**

The NCP6354, a synchronous buck converter, which is optimized to supply the different sub systems of portable applications powered by one cell Li-ion or three cell Alkaline/NiCd/NiMH batteries. The device is able to deliver up to 2 A on an external adjustable voltage. Operation with 3 MHz switching frequency allows employing small size inductor and capacitors. Input supply voltage feedforward control is employed to deal with wide input voltage range. Synchronous rectification offers improved system efficiency.

**PWM Operation**

The inductor current is continuous and the device operates in fixed switching frequency, which has a typical value of 3 MHz. The output voltage is regulated by on-time pulse width modulation of the internal P-MOSFET. The internal N-MOSFET operates as synchronous rectifier and its turn-on signal is complimentary to that of the P-MOSFET.

**Undervoltage Lockout**

The input voltage  $V_{IN}$  must reach or exceed 2.4 V (typical) before the NCP6354 enables the converter output to begin the start up sequence. The UVLO threshold hysteresis is typically 100 mV.

**Enable**

The NCP6354 has an enable logic input pin EN. A high level (above 1.1 V) on this pin enables the device to active mode. A low level (below 0.4 V) on this pin disables the

device and makes the device in shutdown mode. There is an internal filter with 5  $\mu$ s time constant. The EN pin is pulled down by an internal 10 nA sink current source. In most of applications, the EN signal can be programmed independently to  $V_{IN}$  power sequence.

**Power Good Output**

For NCP6354 with power good output, the device monitors the output voltage and provides a power good output signal at the PG pin. This pin is an open-drain output pin. To indicate the output of the converter is established, a power good signal is available. The power good signal is low when EN is high but the output voltage has not been established. Once the output voltage of the converter drops out below 90% of its regulation during operation, the power good signal is pulled low and indicates a power failure. A 5% hysteresis is required on power good comparator before signal going high again.

**Soft Start**

A soft start limits inrush current when the converter is enabled. After a minimum 300  $\mu$ s delay time following the enable signal, the output voltage starts to ramp up in 100  $\mu$ s (for external adjustable voltage devices) or with a typical 10 V/ms slew rate (for fixed voltage devices).

**Active Output Discharge**

An output discharge operation is active in when EN is low. A discharge resistor (500  $\Omega$  typical) is enabled in this condition to discharge the output capacitor through SW pin.

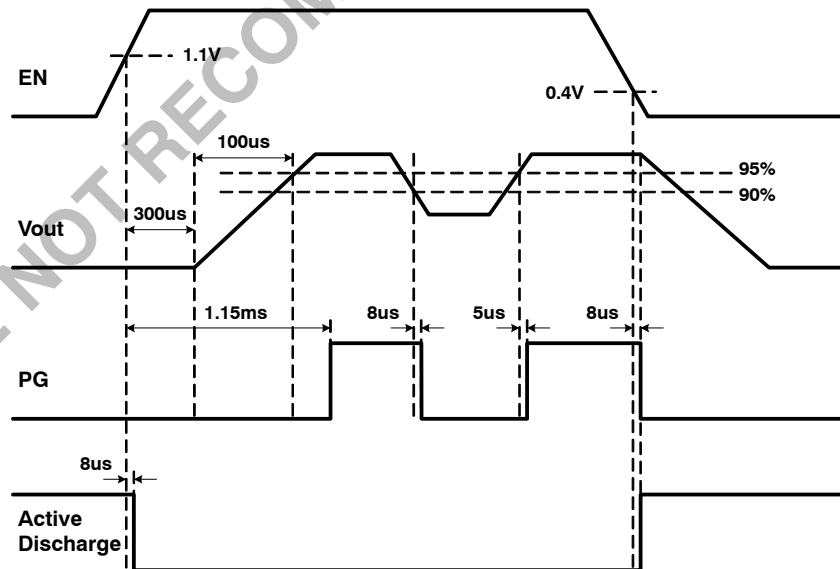


Figure 18. Power Good and Active Discharge Timing Diagram

**Cycle-by-Cycle Current Limitation**

The NCP6354 protects the device from over current with a fixed cycle-by-cycle current limitation. The typical peak current limit ILMT is 2.8 A. If inductor current exceeds the

current limit threshold, the P-MOSFET will be turned off cycle-by-cycle. The maximum output current can be calculated by

$$I_{MAX} = I_{LMT} - \frac{V_{OUT} \cdot (V_{IN} - V_{OUT})}{2 \cdot V_{IN} \cdot f_{SW} \cdot L} \quad (\text{eq. 1})$$

where  $V_{IN}$  is input supply voltage,  $V_{OUT}$  is output voltage,  $L$  is inductance of the filter inductor, and  $f_{SW}$  is 3 MHz normal switching frequency.

**Thermal Shutdown**

The NCP6354 has a thermal shutdown protection to protect the device from overheating when the die temperature exceeds 150°C. Once the thermal protection is triggered, the fault state can be ended by re-applying  $V_{IN}$  and/or EN when the temperature drops down below 125°C.

**APPLICATION INFORMATION**

**Output Filter Design Considerations**

The output filter introduces a double pole in the system at a frequency of

$$f_{LC} = \frac{1}{2 \cdot \pi \cdot \sqrt{L \cdot C}} \quad (\text{eq. 2})$$

The internal compensation network design of the NCP6354 is optimized for the typical output filter comprised of a 1.0  $\mu\text{H}$  inductor and a 10  $\mu\text{F}$  ceramic output capacitor, which has a double pole frequency at about 50 kHz. Other possible output filter combinations may have a double pole around 50 kHz to have optimum operation with the typical feedback network. Normal selection range of the inductor is from 0.47  $\mu\text{H}$  to 4.7  $\mu\text{H}$ , and normal selection range of the output capacitor is from 4.7  $\mu\text{F}$  to 22  $\mu\text{F}$ .

**Inductor Selection**

The inductance of the inductor is determined by given peak-to-peak ripple current  $I_{L\_PP}$  of approximately 20% to

50% of the maximum output current  $I_{OUT\_MAX}$  for a trade-off between transient response and output ripple. The inductance corresponding to the given current ripple is

$$L = \frac{(V_{IN} - V_{OUT}) \cdot V_{OUT}}{V_{IN} \cdot f_{SW} \cdot I_{L\_PP}} \quad (\text{eq. 3})$$

The selected inductor must have high enough saturation current rating to be higher than the maximum peak current that is

$$I_{L\_MAX} = I_{OUT\_MAX} + \frac{I_{L\_PP}}{2} \quad (\text{eq. 4})$$

The inductor also needs to have high enough current rating based on temperature rise concern. Low DCR is good for efficiency improvement and temperature rise reduction. Table 1 shows some recommended inductors for high power applications and Table 2 shows some recommended inductors for low power applications.

**Table 1. LIST OF RECOMMENDED INDUCTORS FOR HIGH POWER APPLICATIONS**

| Manufacturer | Part Number    | Case Size (mm)  | L ( $\mu\text{H}$ ) | Rated Current (mA)<br>(Inductance Drop) | Structure  |
|--------------|----------------|-----------------|---------------------|---|------------|
| MURATA       | LQH44PN2R2MP0  | 4.0 x 4.0 x 1.8 | 2.2                 | 2500 (-30%)                             | Wire Wound |
| MURATA       | LQH44PN1R0NP0  | 4.0 x 4.0 x 1.8 | 1.0                 | 2950 (-30%)                             | Wire Wound |
| MURATA       | LQH32PNR47NPN0 | 3.0 x 2.5 x 1.7 | 0.47                | 3400 (-30%)                             | Wire Wound |

**Table 2. LIST OF RECOMMENDED INDUCTORS FOR LOW POWER APPLICATIONS**

| Manufacturer | Part Number     | Case Size (mm)  | L ( $\mu\text{H}$ ) | Rated Current (mA)<br>(Inductance Drop) | Structure  |
|--------------|-----------------|-----------------|---------------------|---|------------|
| MURATA       | LQH44PN2R2MJ0   | 4.0 x 4.0 x 1.1 | 2.2                 | 1320 (-30%)                             | Wire Wound |
| MURATA       | LQH44PN1R0NJ0   | 4.0 x 4.0 x 1.1 | 1.0                 | 2000 (-30%)                             | Wire Wound |
| TDK          | VLS201612ET-2R2 | 2.0 x 1.6 x 1.2 | 2.2                 | 1150 (-30%)                             | Wire Wound |
| TDK          | VLS201612ET-1R0 | 2.0 x 1.6 x 1.2 | 1.0                 | 1650 (-30%)                             | Wire Wound |

**Output Capacitor Selection**

The output capacitor selection is determined by output voltage ripple and load transient response requirement. For a given peak-to-peak ripple current  $I_{L\_PP}$  in the inductor of the output filter, the output voltage ripple across the output capacitor is the sum of three components as below.

$$V_{OUT\_PP} = V_{OUT\_PP(C)} + V_{OUT\_PP(ESR)} + V_{OUT\_PP(ESL)} \quad (\text{eq. 5})$$

where  $V_{OUT\_PP(C)}$  is a ripple component by an equivalent total capacitance of the output capacitors,  $V_{OUT\_PP(ESR)}$  is a ripple component by an equivalent ESR of the output capacitors, and  $V_{OUT\_PP(ESL)}$  is a ripple component by an equivalent ESL of the output capacitors. In PWM operation mode, the three ripple components can be obtained by

$$V_{OUT\_PP(C)} = \frac{I_{L\_PP}}{8 \cdot C \cdot f_{SW}} \quad (\text{eq. 6})$$

$$V_{OUT\_PP(ESR)} = I_{L\_PP} \cdot ESR \quad (\text{eq. 7})$$

$$V_{OUT\_PP(ESL)} = \frac{ESL}{ESL + L} \cdot V_{IN} \quad (\text{eq. 8})$$

and the peak-to-peak ripple current is

$$I_{L\_PP} = \frac{(V_{IN} - V_{OUT}) \cdot V_{OUT}}{V_{IN} \cdot f_{SW} \cdot L} \quad (\text{eq. 9})$$

In applications with all ceramic output capacitors, the main ripple component of the output ripple is  $V_{OUT\_PP(C)}$ . So that the minimum output capacitance can be calculated regarding to a given output ripple requirement  $V_{OUT\_PP}$  in PWM operation mode.

$$C_{MIN} = \frac{I_{L\_PP}}{8 \cdot V_{OUT\_PP} \cdot f_{SW}} \quad (\text{eq. 10})$$

### Input Capacitor Selection

One of the input capacitor selection guides is the input voltage ripple requirement. To minimize the input voltage

ripple and get better decoupling in the input power supply rail, ceramic capacitor is recommended due to low ESR and ESL. The minimum input capacitance regarding to the input ripple voltage  $V_{IN\_PP}$  is

$$C_{IN\_MIN} = \frac{I_{OUT\_MAX} \cdot (D - D^2)}{V_{IN\_PP} \cdot f_{SW}} \quad (\text{eq. 11})$$

where

$$D = \frac{V_{OUT}}{V_{IN}} \quad (\text{eq. 12})$$

In addition, the input capacitor needs to be able to absorb the input current, which has a RMS value of

$$I_{IN\_RMS} = I_{OUT\_MAX} \cdot \sqrt{D - D^2} \quad (\text{eq. 13})$$

The input capacitor also needs to be sufficient to protect the device from over voltage spike, and normally at least a 4.7  $\mu$ F capacitor is required. The input capacitor should be located as close as possible to the IC on PCB.

**Table 3. LIST OF RECOMMENDED INPUT CAPACITORS AND OUTPUT CAPACITORS**

| Manufacturer | Part Number            | Case Size | Height Max (mm) | C ( $\mu$ F) | Rated Voltage (V) | Structure |
|--------------|------------------------|-----------|-----------------|--------------|-------------------|-----------|
| MURATA       | GRM21BR60J226ME39, X5R | 0805      | 1.4             | 22           | 6.3               | MLCC      |
| TDK          | C2012X5R0J226M, X5R    | 0805      | 1.25            | 22           | 6.3               | MLCC      |
| MURATA       | GRM21BR61A106KE19, X5R | 0805      | 1.35            | 10           | 10                | MLCC      |
| TDK          | C2012X5R1A106M, X5R    | 0805      | 1.25            | 10           | 10                | MLCC      |
| MURATA       | GRM188R60J106ME47, X5R | 0603      | 0.9             | 10           | 6.3               | MLCC      |
| TDK          | C1608X5R0J106M, X5R    | 0603      | 0.8             | 10           | 6.3               | MLCC      |
| MURATA       | GRM188R60J475KE19, X5R | 0603      | 0.87            | 4.7          | 6.3               | MLCC      |

### Design of Feedback Network

For NCP6354 devices with an external adjustable output voltage, the output voltage is programmed by an external resistor divider connected from  $V_{OUT}$  to FB and then to AGND, as shown in the typical application schematic Figure 1a. The programmed output voltage is

$$V_{OUT} = V_{FB} \cdot \left( 1 + \frac{R_1}{R_2} \right) \quad (\text{eq. 14})$$

where  $V_{FB}$  is equal to the internal reference voltage 0.6 V,  $R_1$  is the resistance from  $V_{OUT}$  to FB, which has a normal value range from 50 k $\Omega$  to 1 M $\Omega$  and a typical value of

220 k $\Omega$  for applications with the typical output filter.  $R_2$  is the resistance from FB to AGND, which is used to program the output voltage according to Equation 14 once the value of  $R_1$  has been selected. An capacitor  $C_{fb}$  needs to be employed between the  $V_{OUT}$  and FB in order to provide feedforward function to achieve optimum transient response. Normal value range of  $C_{fb}$  is from 0 to 100pF, and a typical value is 15 pF for applications with the typical output filter and  $R_1 = 220$  k $\Omega$ .

Table 4 provides reference values of  $R_1$  and  $C_{fb}$  in case of different output filter combinations. The final design may need to be fine tuned regarding to application specifications.

# NCP6354

**Table 4. REFERENCE VALUES OF FEEDBACK NETWORKS ( $R_1$  AND  $C_{fb}$ ) FOR OUTPUT FILTER COMBINATIONS (L AND C)**

| $R_1$ (k $\Omega$ ) |     | L ( $\mu$ H) |      |     |     |     |     |
|---------------------|-----|--------------|------|-----|-----|-----|-----|
| $C_{fb}$ (pF)       |     | 0.47         | 0.68 | 1   | 2.2 | 3.3 | 4.7 |
| C ( $\mu$ F)        | 4.7 | 220          | 220  | 220 | 220 | 330 | 330 |
|                     |     | 3            | 5    | 8   | 15  | 15  | 22  |
|                     | 10  | 220          | 220  | 220 | 220 | 330 | 330 |
|                     |     | 8            | 10   | 15  | 27  | 27  | 39  |
|                     | 22  | 220          | 220  | 220 | 220 | 330 | 330 |
|                     |     | 15           | 22   | 27  | 39  | 47  | 56  |

DEVICE NOT RECOMMENDED FOR NEW DESIGN

LAYOUT CONSIDERATIONS

**Electrical Layout Considerations**

Good electrical layout is a key to make sure proper operation, high efficiency, and noise reduction. Electrical layout guidelines are:

- Use wide and short traces for power paths (such as PVIN, VOUT, SW, and PGND) to reduce parasitic inductance and high-frequency loop area. It is also good for efficiency improvement.
- The device should be well decoupled by input capacitor and input loop area should be as small as possible to reduce parasitic inductance, input voltage spike, and noise emission.
- SW node should be a large copper pour, but compact because it is also a noise source.
- It would be good to have separated ground planes for PGND and AGND and connect the two planes at one point. Directly connect AGND pin to the exposed pad and then connect to AGND ground plane through vias. Try best to avoid overlap of input ground loop and output ground loop to prevent noise impact on output regulation.
- Arrange a “quiet” path for output voltage sense and feedback network, and make it surrounded by a ground plane.

**Thermal Layout Considerations**

Good thermal layout helps high power dissipation from a small package with reduced temperature rise. Thermal layout guidelines are:

- The exposed pad must be well soldered on the board.
- A four or more layers PCB board with solid ground planes is preferred for better heat dissipation.
- More free vias are welcome to be around IC and/or underneath the exposed pad to connect the inner ground layers to reduce thermal impedance.
- Use large area copper especially in top layer to help thermal conduction and radiation.
- Do not put the inductor to be too close to the IC, thus the heat sources are distributed.

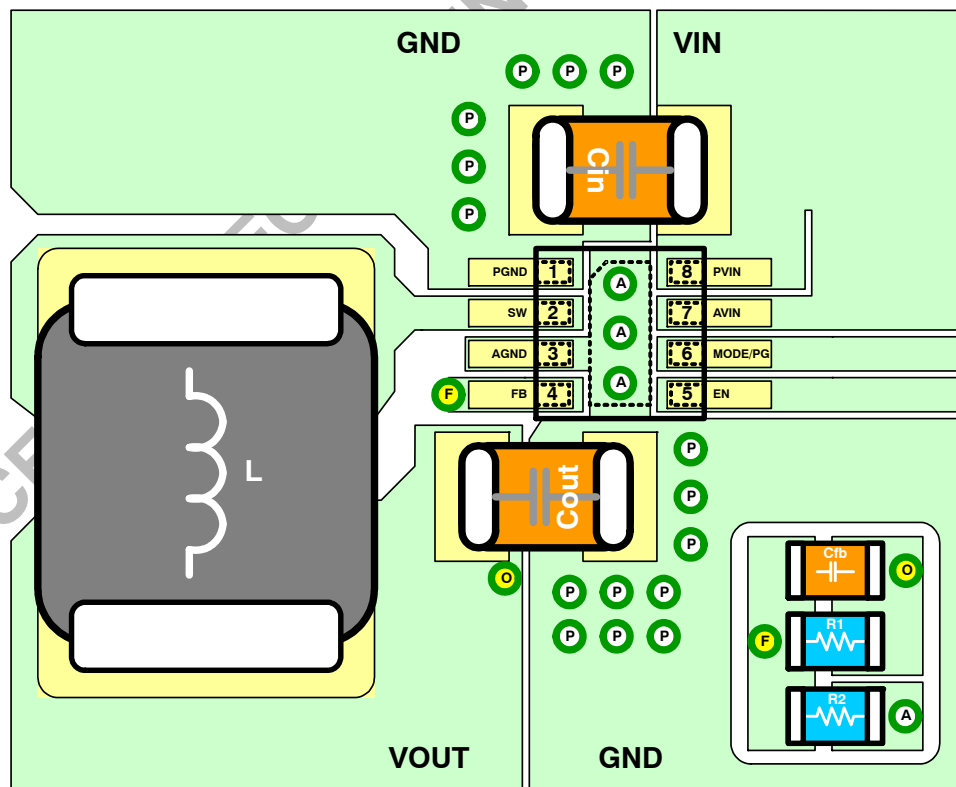


Figure 19. Recommended PCB Layout for Application Boards

# NCP6354

## ORDERING INFORMATION

| Device          | Marking | Package            | Shipping†          |
|-----------------|---------|--------------------|--------------------|
| NCP6354BMTAATBG | A2      | WDFN8<br>(Pb-Free) | 3000 / Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


DEVICE NOT RECOMMENDED FOR NEW DESIGN



SCALE 2:1

**WDFN8 2x2, 0.5P**  
CASE 511BE  
ISSUE A


DATE 27 MAY 2011

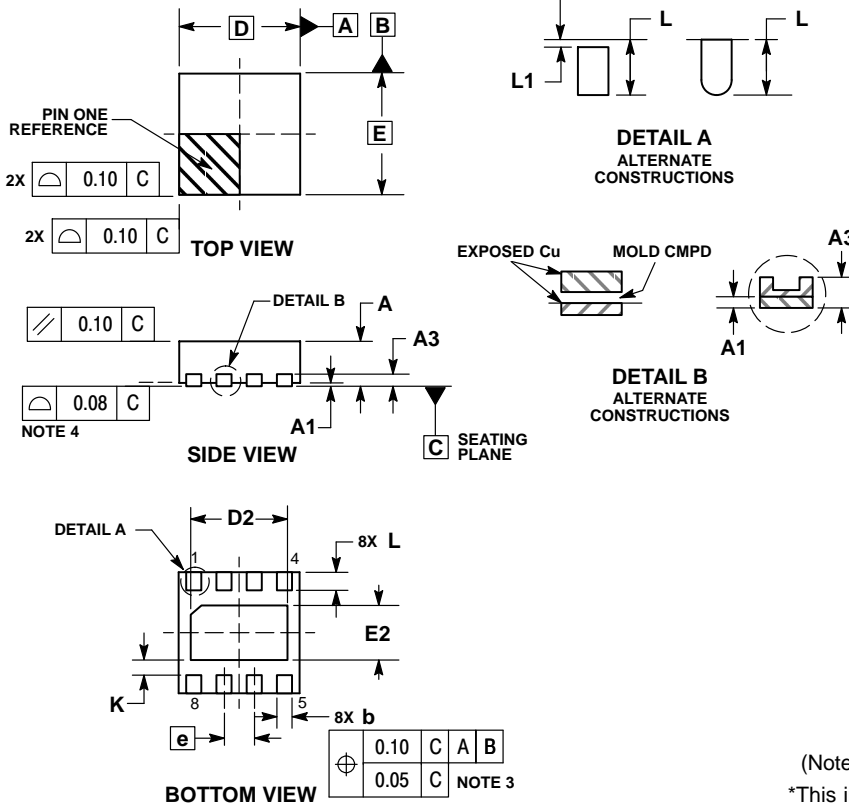

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
  2. CONTROLLING DIMENSION: MILLIMETERS.
  3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.30 MM FROM TERMINAL TIP.
  4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.

| MILLIMETERS |      |      |
|-------------|------|------|
| DIM         | MIN  | MAX  |
| A           | 0.70 | 0.80 |
| A1          | 0.00 | 0.05 |
| A3          | 0.20 | REF  |
| b           | 0.20 | 0.30 |
| D           | 2.00 | BSC  |
| D2          | 1.50 | 1.70 |
| E           | 2.00 | BSC  |
| E2          | 0.80 | 1.00 |
| e           | 0.50 | BSC  |
| K           | 0.25 | REF  |
| L           | 0.20 | 0.40 |
| L1          | ---  | 0.15 |


**GENERIC MARKING DIAGRAM\***



- XX = Specific Device Code
- M = Date Code
- = Pb-Free Package

(Note: Microdot may be in either location)  
\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present.

**RECOMMENDED SOLDERING FOOTPRINT\***

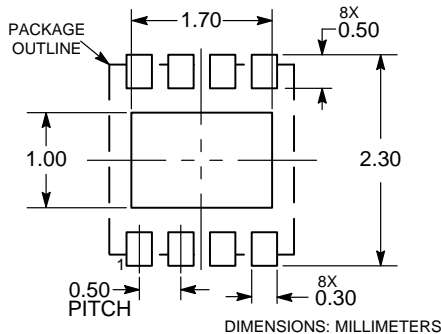

\*For additional information on our Pb-Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

|                         |                         |   |
|-------------------------|-------------------------|---|
| <b>DOCUMENT NUMBER:</b> | <b>98AON48936E</b>      | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>WDFN8, 2X2, 0.5P</b> | <b>PAGE 1 OF 1</b>  |

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at [www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)

