

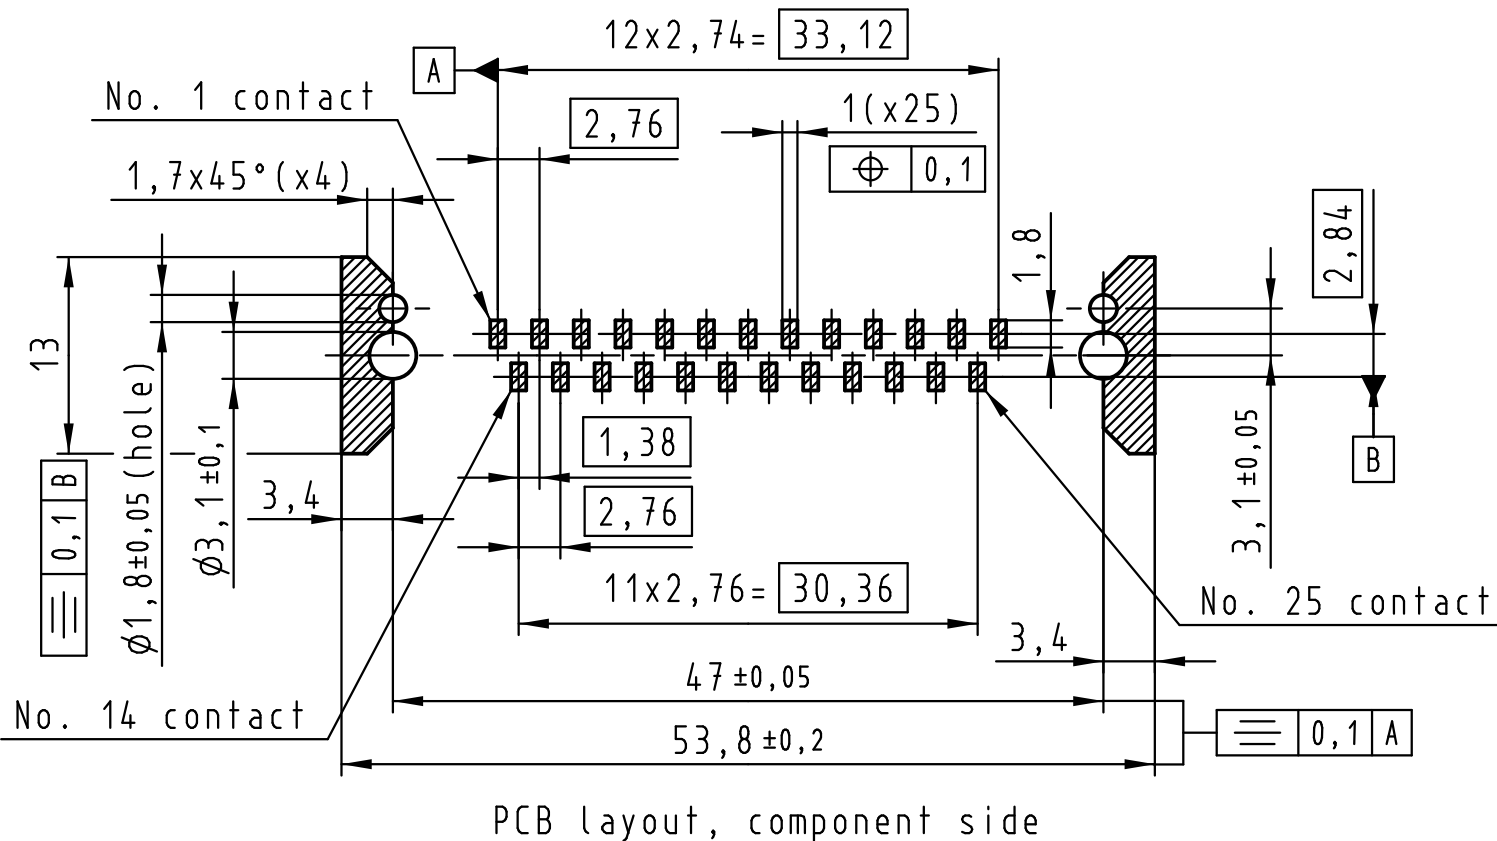
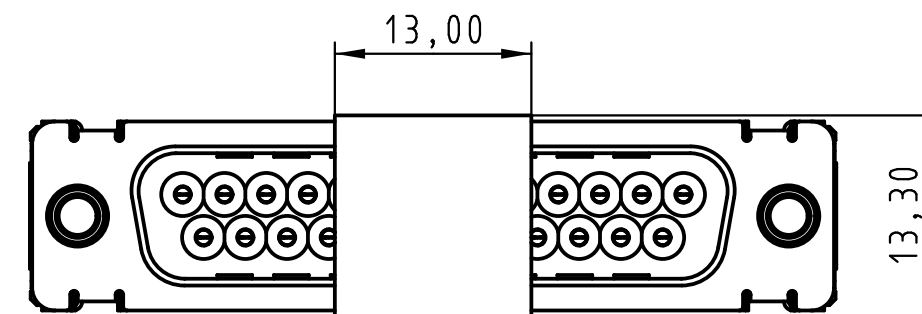
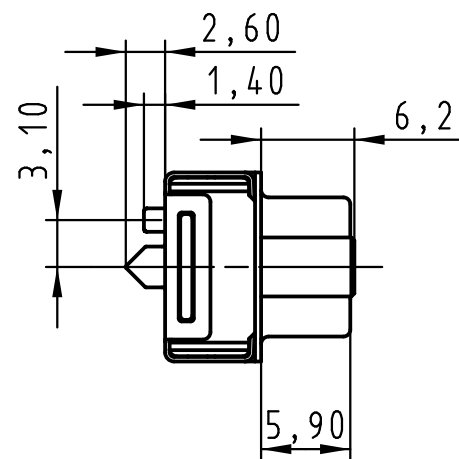
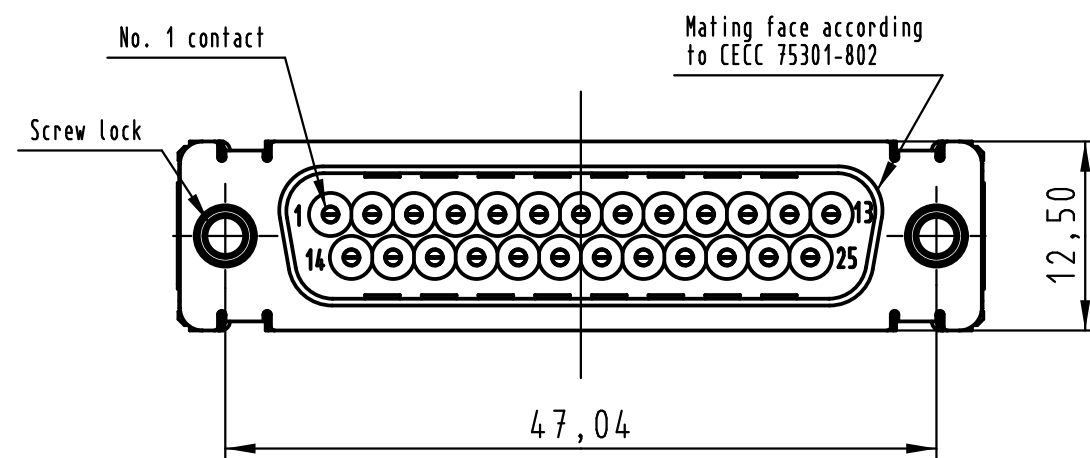
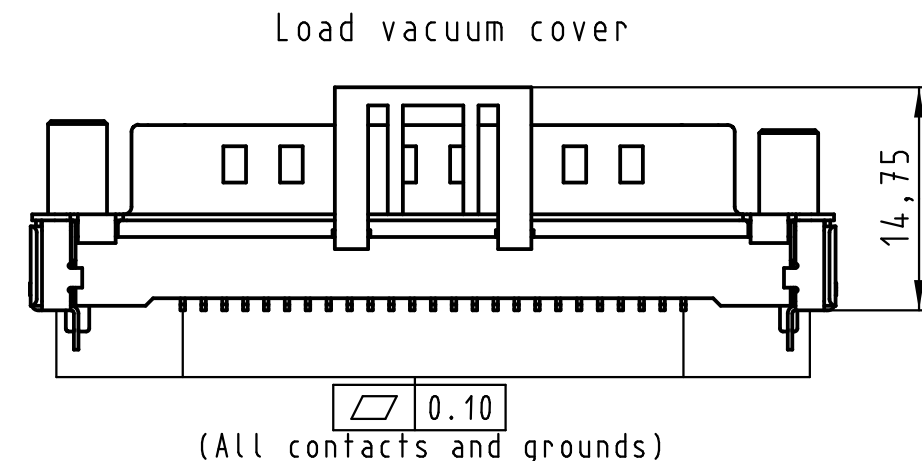




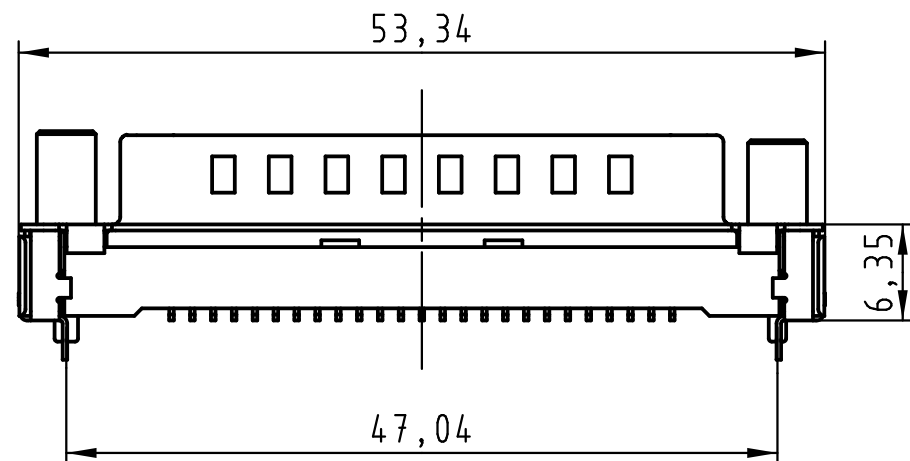


Max. Temperature: 260° during 10 seconds.

0955 369 3821 741	1	M3	Black insulator	Reel Packaging: 140 connectors (See details on page2/2)				
0955 369 3822 741	1	4-40 UNC						
0955 369 6821 741	2	M3						
0955 369 6822 741	2	4-40 UNC						
0955 369 7821 741	3	M3						
0955 369 7822 741	3	4-40 UNC						
Part number	PL	Screw lock	Index designation					
All Dimensions in mm Original Size DIN A 3			Techn. Character.		Free size tolerances			
				Dat.	Name	Scale	D-Sub SMT, 25 poles Male, Straight with screw locks and ground pins	
			Detail.	25-Oct-11	Johnson.S	2 : 1		
			Insp.	17-Nov-11	Steven.W			
			Stand.	17-Nov-11	Steven.W			
			Zhuhai HARTING Limited 				TB 09 55 369 x82x	Page 1 / 2
EC04070	17-Nov-11	Johnson.S					Sub.	
Mod.	Dat.	Name						

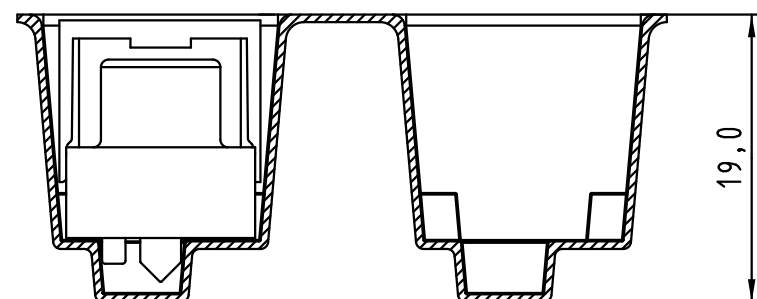

Detail A

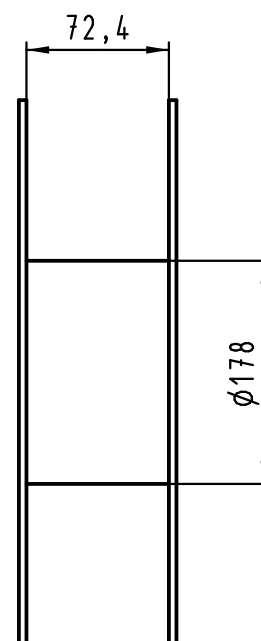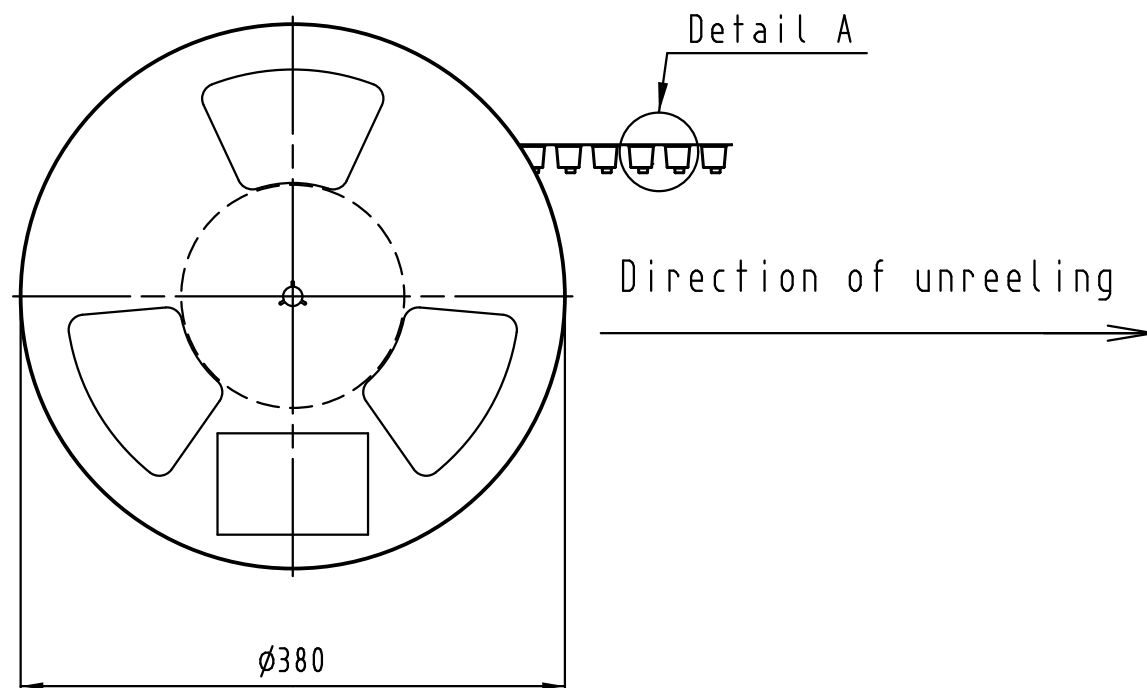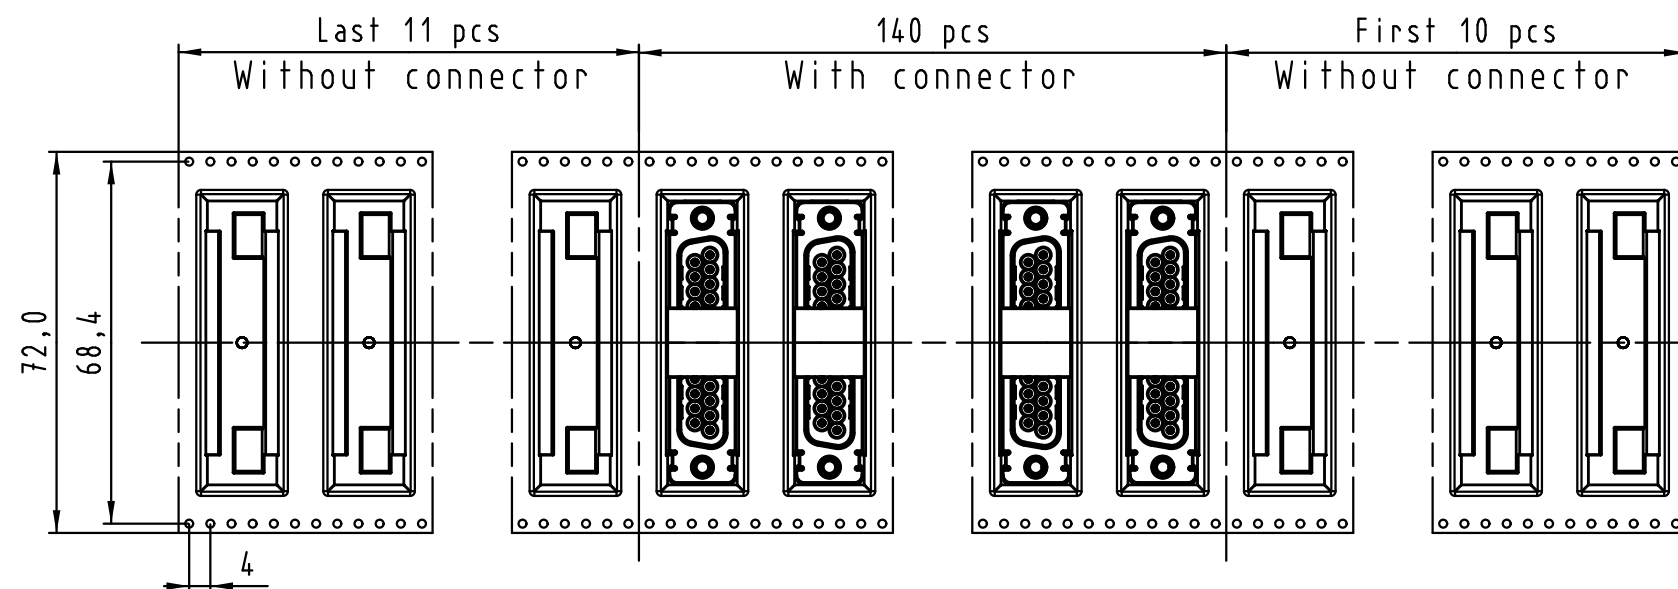

See TB 09 55 369 x82x folio 1/2
for connector dimensions
and PCB layout

Packaging in accordance with
EIA 481-2.

0955 369 3821 741	1	M3	Black insulator	Reel Packaging: 140 connectors
0955 369 3822 741	1	4-40 UNC		
0955 369 6821 741	2	M3		
0955 369 6822 741	2	4-40 UNC		
0955 369 7821 741	3	M3		
0955 369 7822 741	3	4-40 UNC		
Part number	PL	Screw lock	Index designation	

			All Dimensions in mm Original Size DIN A 3			Techn. Character.			Free size tolerances		
				Dat.	Name	Scale	D-Sub SMT, 25 poles Male, Straight with screw locks and ground pins				
			Detail.	25-Oct-11	Johnson.S						
			Insp.	17-Nov-11	Steven.W						
			Stand.	17-Nov-11	Steven.W						
							TB 09 55 369 x82x			Page 2/2	
EC04070	17-Nov-11	Johnson.S	Zhuhai HARTING Limited								
Mod.	Dat.	Name				Sub.					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[09553696821741](#) [09553697821741](#) [09553696822741](#) [09553697822741](#)