



SPECIFICATION FOR APPROVAL

File No.: Q/FRK 0.GS.E.C42-E11

Product Name	Box-type Metallized Polypropylene Film Interference Suppression Capacitor (Class X2)
Product Type	MKP62 Series
Type Code	C42
Product Code	
Customer	
Customer Code	
Issue Date	2014-10



Xiamen Faratronic Co. Ltd.

Add: 99 Xinyuan Road, Haicang District, Xiamen, China


Domestic business
TEL: 0592-6208620 6208618
FAX: 0592-6208777
Mail: fsc@faratronic.com.cn
michael_lai@faratronic.com.cn
Http: www.faratronic.com.cn

Export business
0086-592-6208586 6208608
0086-592-6208557
James@faratronic.com.cn
jxh@faratronic.com.cn

*.The specification are the property of Xiamen Faratronic Co.Ltd and shall not be copied or used as commercial purposes without permission.

Metallized polypropylene film interference suppression capacitor(Class X2, 305Vac)

■ Outline Drawing

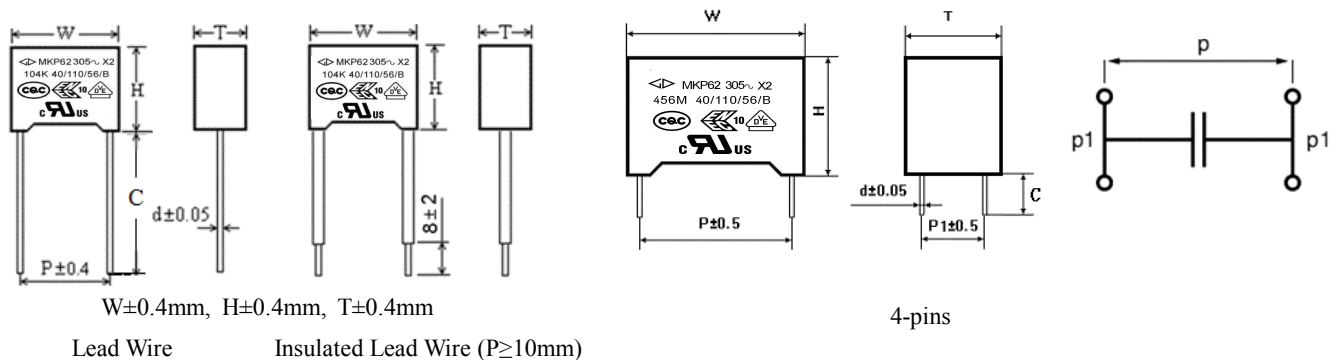

Lead Wire Dia.	0.6	0.8	1.0
Insulated Lead Wire Gauge	AWG22	AWG20	AWG18

Note: There are two kind of the insulated lead wire:

1. Insulated rigid leads;
2. Insulated flexible leads.

■ Features

- Withstanding overvoltage stressing
- Excellent active and passive flame resistant abilities
- Widely used in across-the-line, interference suppression circuit, etc.

■ Safety Approvals

●		CQC	GB/T 14472-1998, X2, 305Vac, 0.0010μF~50.0μF, 40/110/56/B Certificate No.: CQC03001002875
●		ENEC-VDE	EN 60384-14:2005, X2, 305Vac, 0.0010μF~50.0μF, 40/110/56/B Certificate No.: 40000358
●		UL-CUL	UL60384-14:2009, CSA E60384-14:09, X2, 305Vac, 0.0010μF~50.0μF, 40/110/56/B File No.: E186600, CCN: FOWX2/8
●		KC	K60384-14(2006), X2, 305Vac, 0.0010μF~3.0μF, 40/110/56/B Certificate No.: SU03060-12001A/12002/12003/12004

■ Specifications

Class	Class X2		
Climatic Category / Passive Flammability	40/110/56/B		
Operating Temperature Range	-40℃ ~ +110℃		
Rated Voltage	275Vac/305Vac, 50/60Hz		
Mains voltage applied to	Mains voltage can't be higher than 250Vac 50/60Hz		
Maximum continuous DC voltage	Normal Size	630Vdc	
	Miniaturization	560Vdc, C _N ≤1.0μF ; 520 Vdc, C _N >1.0μF	
Capacitance Range	0.0010μF~50.0μF		
Capacitance Tolerance	±10%(K), ±20%(M)		
Voltage Proof	Between Terminals	2 000Vdc (2s) C _N ≤1.0μF	
		1 800Vdc (2s) C _N >1.0μF	
	Between Terminals To Case	2 120Vac (1min)	
Insulation Resistance	R≥15 000MΩ , C _N ≤0.33μF RC _N ≥5 000s, C _N >0.33μF (20℃, 100V, 1min)		
Dissipation Factor	0.0010μF≤C _N <0.010μF	≤20×10 ⁻⁴ (1kHz,20℃)	≤20×10 ⁻⁴ (10kHz,20℃)
	0.010μF≤C _N <0.47μF	≤10×10 ⁻⁴ (1kHz,20℃)	≤20×10 ⁻⁴ (10kHz,20℃)
	0.47μF≤C _N ≤1.0μF	≤20×10 ⁻⁴ (1kHz,20℃)	≤40×10 ⁻⁴ (10kHz,20℃)
	1.0μF<C _N ≤10.0μF	≤30×10 ⁻⁴ (1kHz,20℃)	-----
	10.0μF<C _N ≤50.0μF	≤40×10 ⁻⁴ (1kHz,20℃)	-----



■ Part number system

The 18 digits part number is formed as follow:

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
C	4	2															

Digit 1 to 3 Series code

C42=MKP62

Digit 4 to 5 A.C. rated voltage

Q2=305V P2=275V

Digit 6 to 8 Rated capacitance value

For example : 103=10×10³ pF= 0.01μF

Digit 9 Capacitance tolerance

K=±10%, M=±20%

Digit 10 Pitch

3=7.5mm 4=10.0mm 6=15.0mm 9=22.5mm

B=27.5mm F=37.5mm M=52.5mm

Digit 11 Internal use

Digit 12 to 15 Lead form and packaging code

Digit 16 to 18 Internal use

Table1 Lead form and packaging code

Digit 12		Digit 13		Digit 14		Digit 15	
code	explanation	code	explanation	code	explanation	code	explanation
A	ammo-pack	3 4 6	F=7.5mm F=10.0mm F=15.0mm	0	Straight	1 5	each cap. among two consecutive holes P3=12.7mm,H=18.5mm (For P=7.5mm) P3=25.4mm;H=18.5mm (For pitch=10/15mm) (Detail parameter refer to page 11)
C	straight lead “C” in the figure above	code	explanation			0	Length tolerance ±0.5mm or standard length
		00 45	standard lead length (18mm~26mm) lead length 4.5mm				
D E M	Insulated stranded leads Insulated solid leads Insulated leads and box with mounting foot	C5 K0 K2 L0	35mm 100mm 120mm 200mm	Note: This length includes the stripping parts.		1 2 3 4	Length tolerance -5 mm~0 mm Length tolerance 0 mm~+5 mm Length tolerance 0 mm~+10mm Length tolerance ±5 mm
1 3 6	P1= 10mm P1= 20mm P1= 5mm	45 55	lead length 4.5mm lead length 5.5mm			0	Length tolerance ±0.5mm or standard length



■ Dimensions(mm) Miniature version

305Vac							305Vac							305Vac						
C _N (μF)	W ±0.4	H ±0.4	T ±0.4	P ±0.4	d	Part number	C _N (μF)	W ±0.4	H ±0.4	T ±0.4	P ±0.4	d	Part number	C _N (μF)	W ±0.4	H ±0.4	T ±0.4	P ±0.4	d	Part number
0.033M	10.5	9.0	4.0	7.5	0.6	C42Q2333M3F****++	0.47	26.5	15.0	6.0	22.5	0.8	C42Q2474-9F****++	2.2	41.0	22.0	11.0	37.5	1.0	C42Q2225-FF****++
0.033K	10.5	11.0	5.0	7.5	0.6	C42Q2333K3F****++	0.56M	26.5	15.0	6.0	22.5	0.8	C42Q2564M9F****++	2.7	41.0	22.0	11.0	37.5	1.0	C42Q2275-FF****++
0.039	10.5	11.0	5.0	7.5	0.6	C42Q2393-3F****++	0.56K	26.5	16.0	7.0	22.5	0.8	C42Q2564K9F****++	3.3M	41.0	22.0	11.0	37.5	1.0	C42Q2335MF****++
0.047	10.5	11.0	5.0	7.5	0.6	C42Q2473-3F****++	0.68	26.5	16.0	7.0	22.5	0.8	C42Q2684-9F****++	3.3K	41.0	24.0	13.0	37.5	1.0	C42Q2335KF****++
0.056	10.5	11.0	5.0	7.5	0.6	C42Q2563-3F****++	0.82	26.5	17.0	8.5	22.5	0.8	C42Q2824-9F****++	3.3	42.0	15.0	24.0	37.5	1.0	C42Q2335-FD****++
0.068	10.5	12.0	6.0	7.5	0.6	C42Q2683-3F****++	1.0	26.5	17.0	8.5	22.5	0.8	C42Q2105-9F****++	3.9	41.0	24.0	13.0	37.5	1.0	C42Q2395-FF****++
0.082	10.5	12.0	6.0	7.5	0.6	C42Q2823-3F****++	1.2	26.5	18.5	10.0	22.5	0.8	C42Q2125-9F****++	4.7M	41.0	24.0	13.0	37.5	1.0	C42Q2475MF****++
0.033	13.0	9.0	4.0	10.0	0.6	C42Q2333-4F****++	1.5M	26.5	18.5	10.0	22.5	0.8	C42Q2155M9F****++	4.7K	42.0	28.0	14.0	37.5	1.0	C42Q2475KF****++
0.039	13.0	9.0	4.0	10.0	0.6	C42Q2393-4F****++	1.5K	26.5	20.0	11.0	22.5	0.8	C42Q2155K9F****++	4.7K	41.0	26.0	15.0	37.5	1.0	C42Q2475KFG****++
0.047	13.0	9.0	4.0	10.0	0.6	C42Q2473-4F****++	1.8M	26.5	20.0	11.0	22.5	0.8	C42Q2185M9F****++	4.7M	42.0	15.0	24.0	37.5	1.0	C42Q2475MFD****++
0.056	13.0	9.0	4.0	10.0	0.6	C42Q2563-4F****++	1.8K	26.5	22.0	12.0	22.5	0.8	C42Q2185K9F****++	4.7K	42.0	19.0	24.0	37.5	1.0	C42Q2475KFD****++
0.068	13.0	11.0	5.0	10.0	0.6	C42Q2683-4F****++	2.0	26.5	22.0	12.0	22.5	0.8	C42Q2205-9F****++	5.6M	41.0	26.0	15.0	37.5	1.0	C42Q2565MF****++
0.082	13.0	11.0	5.0	10.0	0.6	C42Q2823-4F****++	2.2M	26.5	22.0	12.0	22.5	0.8	C42Q2225M9F****++	5.6K	41.0	30.0	16.0	37.5	1.0	C42Q2565KF****++
0.10	13.0	11.0	5.0	10.0	0.6	C42Q2104-4F****++	2.2K	26.5	23.0	13.5	22.5	0.8	C42Q2225K9F****++	6.8M	41.0	30.0	16.0	37.5	1.0	C42Q2685MF****++
0.12	13.0	12.0	6.0	10.0	0.6	C42Q2124-4F****++	2.7	26.5	24.5	15.5	22.5	0.8	C42Q2275-9F****++	6.8K	41.0	32.0	17.0	37.5	1.0	C42Q2685KF****++
0.15M	13.0	12.0	6.0	10.0	0.6	C42Q2154M4F****++	2.7	26.5	29.5	14.5	22.5	0.8	C42Q2275-9G****++	6.8M	42.0	19.0	24.0	37.5	1.0	C42Q2685MFD****++
0.15K	13.0	13.0	7.0	10.0	0.6	C42Q2154K4F****++	3.3M	26.5	24.5	15.5	22.5	0.8	C42Q2335M9F****++	6.8K	41.0	20.0	26.0	37.5	1.0	C42Q2685KFD****++
0.18	13.0	13.0	7.0	10.0	0.6	C42Q2184-4F****++	3.3	26.5	29.5	14.5	22.5	0.8	C42Q2335-9G****++	8.2M	41.0	32.0	17.0	37.5	1.0	C42Q2825MF****++
0.22	13.0	14.0	8.0	10.0	0.6	C42Q2224-4F****++	3.9M	26.5	29.5	14.5	22.5	0.8	C42Q2395M9F****++	8.2K	41.0	33.5	18.5	37.5	1.0	C42Q2825KF****++
0.10	17.5	9.5	5.0	15.0	0.6	C42Q2104-6F****++	1.2	32.0	18.0	9.0	27.5	0.8	C42Q2125-BF****++	10.0M	41.0	33.5	18.5	37.5	1.0	C42Q2106MF****++
0.12	17.5	9.5	5.0	15.0	0.6	C42Q2124-6F****++	1.5M	32.0	18.0	9.0	27.5	0.8	C42Q2155MBF****++	10.0K	41.0	37.0	22.0	37.5	1.0	C42Q2106KF****++
0.15	17.5	11.0	5.0	15.0	0.6	C42Q2154-6F****++	1.5K	32.0	20.0	11.0	27.5	0.8	C42Q2155KB****++	10.0	42.0	24.0	32.0	37.5	1.0	C42Q2106-FD****++
0.18M	17.5	11.0	5.0	15.0	0.6	C42Q2184M6F****++	1.8	32.0	20.0	11.0	27.5	0.8	C42Q2185-BF****++	12.0M	41.0	37.0	22.0	37.5	1.0	C42Q2126MF****++
0.18K	17.5	12.0	6.0	15.0	0.6	C42Q2184K6F****++	2.0	32.0	20.0	11.0	27.5	0.8	C42Q2205-BF****++	12.0K	41.5	37.5	27.5	37.5	1.0	C42Q2126KFG****++
0.22	17.5	12.0	6.0	15.0	0.6	C42Q2224-6F****++	2.2M	32.0	12.0	22.0	27.5	0.8	C42Q2225MBD****++	12.0K	41.0	41.0	26.0	37.5	1.0	C42Q2126KF****++
0.27	17.5	13.5	7.5	15.0	0.6	C42Q2274-6F****++	2.2M	32.0	20.0	11.0	27.5	0.8	C42Q2225MBF****++	15.0	41.5	37.5	27.5	37.5	1.0	C42Q2156-FD****++
0.27	17.5	12.5	9.0	15.0	0.6	C42Q2274-6G****++	2.2K	32.0	22.0	13.0	27.5	0.8	C42Q2225KBF****++	15.0	41.0	41.0	26.0	37.5	1.0	C42Q2156-FF****++
0.27	17.5	17.5	6.0	15.0	0.6	C42Q2274-6H****++	2.7	32.0	25.0	13.0	27.5	0.8	C42Q2275-BF****++	18.0	41.0	43.0	28.0	37.5	1.0	C42Q2186-FF****++
0.33K	17.5	13.5	7.5	15.0	0.6	C42Q2334K6F****++	3.0	32.0	24.5	15.0	27.5	0.8	C42Q2305-BF****++	20.0M	41.0	43.0	28.0	37.5	1.0	C42Q2206MF****++
0.33M	17.5	12.0	7.0	15.0	0.6	C42Q2334M6G****++	3.0	32.0	25.0	13.0	27.5	0.8	C42Q2305-BG****++	20.0K	42.0	45.0	30.0	37.5	1.0	C42Q2206KF****++
0.33K	17.5	12.5	9.0	15.0	0.6	C42Q2334K6G****++	3.3M	32.0	25.0	13.0	27.5	0.8	C42Q2335MBG****++	25.0	42.0	57.0	30.0	37.5	1.0	C42Q2256-FF****++
0.33K	17.5	17.5	6.0	15.0	0.6	C42Q2334K6H****++	3.3K	32.0	28.0	14.0	27.5	0.8	C42Q2335KBG****++	C _N (μF)	W ±0.4	H ±0.4	T ±0.4	P ±0.5	d	Part number
0.39	17.5	13.5	7.5	15.0	0.6	C42Q2394-6F****++	3.3	32.0	24.5	15.0	27.5	0.8	C42Q2335-BF****++							
0.39	17.5	12.5	9.0	15.0	0.6	C42Q2394-6G****++	3.3M	32.0	16.0	22.0	27.5	0.8	C42Q2335MBD****++	25.0	57.0	45.0	30.0	52.5	1.2	C42Q2256-MF3****++
0.39	17.5	17.5	6.0	15.0	0.6	C42Q2394-6H****++	3.3K	32.0	16.0	27.5	27.5	0.8	C42Q2335KBD****++	25.0	57.0	30.0	44.0	52.5	1.2	C42Q2256-MD3****++
0.47M	17.5	14.0	8.0	15.0	0.6	C42Q2474M6F****++	3.9M	32.0	28.0	14.0	27.5	0.8	C42Q2395MBF****++	30.0	57.0	45.0	30.0	52.5	1.2	C42Q2306-MF3****++
0.47K	17.5	14.5	8.5	15.0	0.6	C42Q2474K6F****++	3.9K	32.0	28.0	17.0	27.5	0.8	C42Q2395KBF****++	30.0	57.0	30.0	44.0	52.5	1.2	C42Q2306-MD3****++
0.47M	17.5	12.5	9.0	15.0	0.6	C42Q2474M6G****++	4.7M	32.0	28.0	14.0	27.5	0.8	C42Q2475MBF****++	35.0	57.0	50.0	35.0	52.5	1.2	C42Q2356-MF3****++
0.47M	17.5	17.5	6.0	15.0	0.6	C42Q2474M6H****++	4.7	32.0	30.0	16.0	27.5	0.8	C42Q2475-BG****++	40.0	57.0	50.0	35.0	52.5	1.2	C42Q2406-MF3****++
0.47K	17.5	18.5	7.5	15.0	0.8	C42Q2474K6H****++	4.7	32.0	28.0	17.0	27.5	0.8	C42Q2475-BH****++	45.0M	57.0	50.0	35.0	52.5	1.2	C42Q2456MMF3****++
0.47	17.5	12.0	13.0	15.0	0.8	C42Q2474-6D****++	4.7	32.0	18.5	31.0	27.5	0.8	C42Q2475-BD****++							
0.56M	17.5	14.5	8.5	15.0	0.6	C42Q2564M6F****++	5.6M	32.0	29.0	19.0	27.5	0.8	C42Q2565MBF****++							
0.56K	17.5	16.0	10.0	15.0	0.8	C42Q2564K6F****++	5.6K	32.0	33.0	18.0	27.5	0.8	C42Q2565KBF****++							
0.60	17.5	16.0	10.0	15.0	0.8	C42Q2604-6F****++	6.8M	32.0	30.0	21.0	27.5	0.8	C42Q2685MBG****++							
0.68M	17.5	18.5	7.5	15.0	0.8	C42Q2684M6H****++	6.8M	32.0	33.0	18.0	27.5	0.8	C42Q2685MBF****++							
0.68	17.5	16.0	10.0	15.0	0.8	C42Q2684-6F****++	6.8K	32.0	37.0	22.0	27.5	0.8	C42Q2685KBF****++							
0.82	17.5	19.0	11.0	15.0	0.8	C42Q2824-6F****++	8.2	32.0	37.0	22.0	27.5	0.8	C42Q2825-BF****++							
1.0M	17.5	19.0	11.0	15.0	0.8	C42Q2105M6F****++														

Note: 1. “-”=capacitance tolerance code, M=±20%,K=±10%

2. “****”=lead form and packaging mode code (refer to table 1)

3. P=0.5mm for P=52.5mm.



Dimensions(mm) Normal Size

305Vac							305Vac							305Vac						
C _N (μF)	W ±0.4	H ±0.4	T ±0.4	P ±0.4	d	Part number	C _N (μF)	W ±0.4	H ±0.4	T ±0.4	P ±0.4	d	Part number	C _N (μF)	W ±0.4	H ±0.4	T ±0.4	P ±0.4	d	Part number
0.0010	10.5	9.0	4.0	7.5	0.6	C42Q2102-30*****	0.010	17.5	9.5	5.0	15.0	0.6	C42Q2103-6A*****	1.8	26.5	24.5	15.5	22.5	0.8	C42Q2185-9S*****
0.0012	10.5	9.0	4.0	7.5	0.6	C42Q2122-30*****	0.012	17.5	9.5	5.0	15.0	0.6	C42Q2123-6A*****	2.2	26.5	24.5	15.5	22.5	0.8	C42Q2225-9S*****
0.0015	10.5	9.0	4.0	7.5	0.6	C42Q2152-30*****	0.015	17.5	9.5	5.0	15.0	0.6	C42Q2153-6A*****	2.2	26.5	29.5	14.5	22.5	0.8	C42Q2225-9A*****
0.0018	10.5	9.0	4.0	7.5	0.6	C42Q2182-30*****	0.018	17.5	9.5	5.0	15.0	0.6	C42Q2183-6A*****	0.39	32.0	18.0	9.0	27.5	0.8	C42Q2394-B0*****
0.0022	10.5	9.0	4.0	7.5	0.6	C42Q2222-30*****	0.022	17.5	9.5	5.0	15.0	0.6	C42Q2223-6A*****	0.47	32.0	18.0	9.0	27.5	0.8	C42Q2474-B0*****
0.0027	10.5	9.0	4.0	7.5	0.6	C42Q2272-30*****	0.027	17.5	9.5	5.0	15.0	0.6	C42Q2273-6A*****	0.56	32.0	18.0	9.0	27.5	0.8	C42Q2564-B0*****
0.0033	10.5	9.0	4.0	7.5	0.6	C42Q2332-30*****	0.033	17.5	9.5	5.0	15.0	0.6	C42Q2333-6A*****	0.68	32.0	18.0	9.0	27.5	0.8	C42Q2684-B0*****
0.0039	10.5	9.0	4.0	7.5	0.6	C42Q2392-30*****	0.039	17.5	9.5	5.0	15.0	0.6	C42Q2393-6A*****	0.82	32.0	18.0	9.0	27.5	0.8	C42Q2824-BS*****
0.0047	10.5	9.0	4.0	7.5	0.6	C42Q2472-30*****	0.047	17.5	9.5	5.0	15.0	0.6	C42Q2473-6A*****	1.0	32.0	18.0	9.0	27.5	0.8	C42Q2105-BS*****
0.0056	10.5	9.0	4.0	7.5	0.6	C42Q2562-30*****	0.056	17.5	9.5	5.0	15.0	0.6	C42Q2563-6A*****	1.0	32.0	12.0	18.0	27.5	0.8	C42Q2105-BC*****
0.0068	10.5	9.0	4.0	7.5	0.6	C42Q2682-30*****	0.068	17.5	9.5	5.0	15.0	0.6	C42Q2683-6A*****	1.2	32.0	20.0	11.0	27.5	0.8	C42Q2125-BS*****
0.0082	10.5	9.0	4.0	7.5	0.6	C42Q2822-30*****	0.082	17.5	9.5	5.0	15.0	0.6	C42Q2823-6A*****	1.5	32.0	20.0	11.0	27.5	0.8	C42Q2155-BS*****
0.010	10.5	9.0	4.0	7.5	0.6	C42Q2103-30*****	0.10M	17.5	9.5	5.0	15.0	0.6	C42Q2104M6A*****	1.8	32.0	22.0	13.0	27.5	0.8	C42Q2185-BS*****
0.012	10.5	9.0	4.0	7.5	0.6	C42Q2123-30*****	0.10	17.5	11.0	5.0	15.0	0.6	C42Q2104-6S*****	2.2M	32.0	22.0	13.0	27.5	0.8	C42Q2225MBS*****
0.015	10.5	9.0	4.0	7.5	0.6	C42Q2153-30*****	0.12	17.5	11.0	5.0	15.0	0.6	C42Q2124-6S*****	2.2K	32.0	25.0	13.0	27.5	0.8	C42Q2225KBS*****
0.018	10.5	9.0	4.0	7.5	0.6	C42Q2183-30*****	0.15M	17.5	11.0	5.0	15.0	0.6	C42Q2154M6S*****	2.2	32.0	16.0	22.0	27.5	0.8	C42Q2225-BC*****
0.022	10.5	9.0	4.0	7.5	0.6	C42Q2223-3S*****	0.15K	17.5	12.0	6.0	15.0	0.6	C42Q2154K6S*****	2.7	32.0	28.0	14.0	27.5	0.8	C42Q2275-BS*****
0.027	10.5	9.0	4.0	7.5	0.6	C42Q2273-3S*****	0.18	17.5	12.0	6.0	15.0	0.6	C42Q2184-6S*****	3.3	32.0	30.0	16.0	27.5	0.8	C42Q2335-BA*****
0.033	10.5	11.0	5.0	7.5	0.6	C42Q2333-3S*****	0.22M	17.5	12.0	6.0	15.0	0.6	C42Q2224M6S*****	3.3M	32.0	24.5	15.0	27.5	0.8	C42Q2335MBB*****
0.039	10.5	11.0	5.0	7.5	0.6	C42Q2393-3S*****	0.22K	17.5	13.5	6.0	15.0	0.6	C42Q2224K6B*****	3.3K	32.0	28.0	17.0	27.5	0.8	C42Q2335KBB*****
0.047	10.5	11.0	5.0	7.5	0.6	C42Q2473-3S*****	0.22K	17.5	13.5	7.5	15.0	0.6	C42Q2224K6S*****	3.3M	32.0	16.0	27.5	27.5	0.8	C42Q2335MBC*****
0.056	10.5	12.0	6.0	7.5	0.6	C42Q2563-3S*****	0.22K	17.5	12.0	7.0	15.0	0.6	C42Q2224K6C*****	3.3K	32.0	18.5	31.0	27.5	0.8	C42Q2335KBC*****
0.068	10.5	12.0	6.0	7.5	0.6	C42Q2683-3S*****	0.27	17.5	13.5	7.5	15.0	0.6	C42Q2274-6S*****	3.9	32.0	29.0	19.0	27.5	0.8	C42Q2395-BA*****
0.0047	13.0	9.0	4.0	10.0	0.6	C42Q2472-40*****	0.33M	17.5	13.5	7.5	15.0	0.6	C42Q2334M6S*****	3.9	32.0	33.0	18.0	27.5	0.8	C42Q2395-BS*****
0.0056	13.0	9.0	4.0	10.0	0.6	C42Q2562-40*****	0.33K	17.5	14.0	8.0	15.0	0.6	C42Q2334K6S*****	4.7M	32.0	33.0	18.0	27.5	0.8	C42Q2475MBS*****
0.0068	13.0	9.0	4.0	10.0	0.6	C42Q2682-40*****	0.33M	17.5	12.5	9.0	15.0	0.6	C42Q2334M6A*****	4.7M	32.0	18.5	31.0	27.5	0.8	C42Q2475MBC*****
0.0082	13.0	9.0	4.0	10.0	0.6	C42Q2822-40*****	0.33M	17.5	17.5	6.0	15.0	0.6	C42Q2334M6B*****	4.7K	32.0	33.0	18.0	27.5	0.8	C42Q2475KBA*****
0.010	13.0	9.0	4.0	10.0	0.6	C42Q2103-40*****	0.33K	17.5	18.5	7.5	15.0	0.8	C42Q2334K6A*****	4.7	32.0	30.0	21.0	27.5	0.8	C42Q2475-BB*****
0.012	13.0	9.0	4.0	10.0	0.6	C42Q2123-40*****	0.33	17.5	12.0	13.0	15.0	0.8	C42Q2334-6C*****	5.6	32.0	37.0	22.0	27.5	0.8	C42Q2565-BS*****
0.015	13.0	9.0	4.0	10.0	0.6	C42Q2153-40*****	0.39	17.5	14.5	8.5	15.0	0.6	C42Q2394-6S*****	6.8M	32.0	37.0	22.0	27.5	0.8	C42Q2685MBS*****
0.018	13.0	9.0	4.0	10.0	0.6	C42Q2183-40*****	0.47M	17.5	14.5	8.5	15.0	0.6	C42Q2474M6S*****	1.5	41.0	22.0	11.0	37.5	1.0	C42Q2155-FS*****
0.022	13.0	9.0	4.0	10.0	0.6	C42Q2223-40*****	0.47M	17.5	18.5	7.5	15.0	0.8	C42Q2474M6A*****	1.8	41.0	22.0	11.0	37.5	1.0	C42Q2185-FS*****
0.027	13.0	9.0	4.0	10.0	0.6	C42Q2273-40*****	0.47K	17.5	16.0	10.0	15.0	0.8	C42Q2474K6S*****	2.2	41.0	24.0	13.0	37.5	1.0	C42Q2225-FS*****
0.033	13.0	9.0	4.0	10.0	0.6	C42Q2333-4S*****	0.56	17.5	16.0	10.0	15.0	0.8	C42Q2564-6A*****	2.2	42.0	15.0	24.0	37.5	1.0	C42Q2225-FC*****
0.039	13.0	9.0	4.0	10.0	0.6	C42Q2393-4S*****	0.60	17.5	19.0	11.0	15.0	0.8	C42Q2604-6S*****	2.7	41.0	24.0	13.0	37.5	1.0	C42Q2275-FS*****
0.047	13.0	9.0	4.0	10.0	0.6	C42Q2473-4S*****	0.68	17.5	19.0	11.0	15.0	0.8	C42Q2684-6S*****	3.3	41.0	26.0	15.0	37.5	1.0	C42Q2335-FA*****
0.056	13.0	11.0	5.0	10.0	0.6	C42Q2563-4S*****	0.82M	17.5	19.0	11.0	15.0	0.8	C42Q2824M6S*****	3.3	42.0	28.0	14.0	37.5	1.0	C42Q2335-FS*****
0.068	13.0	11.0	5.0	10.0	0.6	C42Q2683-4S*****	0.15	26.5	15.0	6.0	22.5	0.8	C42Q2154-90*****	3.3	42.0	15.0	24.0	37.5	1.0	C42Q2335-FC*****
0.082	13.0	11.0	5.0	10.0	0.6	C42Q2823-4S*****	0.18	26.5	15.0	6.0	22.5	0.8	C42Q2184-90*****	3.9	41.0	30.0	16.0	37.5	1.0	C42Q2395-FS*****
0.10M	13.0	11.0	5.0	10.0	0.6	C42Q2104M4S*****	0.22	26.5	15.0	6.0	22.5	0.8	C42Q2224-9S*****	4.7M	42.0	19.0	24.0	37.5	1.0	C42Q2475MFC*****
0.10K	13.0	12.0	6.0	10.0	0.6	C42Q2104K4S*****	0.27	26.5	15.0	6.0	22.5	0.8	C42Q2274-9S*****	4.7K	41.0	20.0	26.0	37.5	1.0	C42Q2475KFC*****
0.12	13.0	13.0	7.0	10.0	0.6	C42Q2124-4S*****	0.33	26.5	15.0	6.0	22.5	0.8	C42Q2334-9S*****	4.7	41.0	30.0	16.0	37.5	1.0	C42Q2475-FS*****
0.15	13.0	13.0	7.0	10.0	0.6	C42Q2154-4S*****	0.39	26.5	15.0	6.0	22.5	0.8	C42Q2394-9S*****	5.6	41.0	33.5	18.5	37.5	1.0	C42Q2565-FS*****
0.18	13.0	14.0	8.0	10.0	0.6	C42Q2184-4S*****	0.47M	26.5	15.0	6.0	22.5	0.8	C42Q2474M9S*****	6.8	41.0	33.5	18.5	37.5	1.0	C42Q2685-FS*****
0.22M	13.0	14.0	8.0	10.0	0.6	C42Q2224M4S*****	0.47K	26.5	16.0	7.0	22.5	0.8	C42Q2474K9S*****	6.8	42.0	24.0	32.0	37.5	1.0	C42Q2685-FC*****
							0.56	26.5	16.0	7.0	22.5	0.8	C42Q2564-9S*****	8.2	41.0	37.0	22.0	37.5	1.0	C42Q2825-FS*****
							0.60	26.5	17.0	8.5	22.5	0.8	C42Q2604-9S*****	10.0M	41.0	37.0	22.0	37.5	1.0	C42Q2106MFS*****
							0.68	26.5	17.0	8.5	22.5	0.8	C42Q2684-9S*****	10.0K	41.0	41.0	26.0	37.5	1.0	C42Q2106KFS*****
							0.82	26.5	18.5	10.0	22.5	0.8	C42Q2824-9S*****	10.0K	41.5	37.5	27.5	37.5	1.0	C42Q2106KFA*****
							1.0	26.5	18.5	10.0	22.5	0.8	C42Q2105-9S*****							

Note: 1. “-”=capacitance tolerance code, M=±20%,K=±10%

2. “****”=lead form and packaging mode code (refer to table 1); 3. P±0.5mm for P=52.5mm

■ Maximum permissible voltage change per unit of time

Rated Voltage (Vac)	dV/dt(V/us) at 440 Vdc						
	P=7.5mm	P=10mm	P=15mm	P=22.5mm	P=27.5mm	P=37.5mm	P=52.5mm
305	500	500	400	200	150	100	50


Note:

1. Rated voltage pulse slope $(dV/dt)_R$ at rated voltage.
2. If the working voltage(U) is lower than the rated voltage(U_R),the capacitor can be worked at a higher dV/dt. In this case, the maximum allowed dV/dt is obtain by multiplying the right value with U_R/U .

■ Impedance Vs. Frequency

TYPICAL GRAPHS

$Z=f(f)$ Typical values

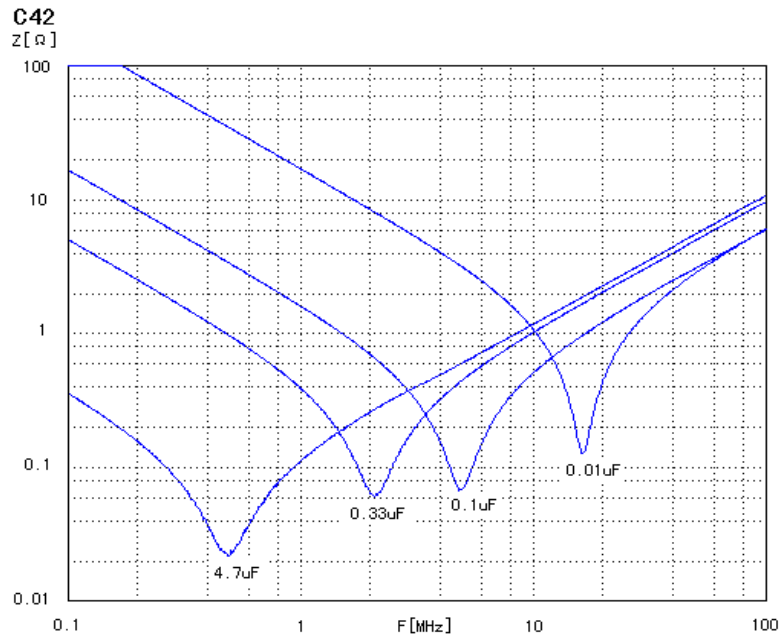

■ Quality ensuring test (before shipment):

Inspection item (each batch)	Inspection level (GB/T 2828.1, ISO2859-1)	
	IL	AQL
Appearance inspection	II	1.5%
Dimensions		
Capacitance	II	0.25%
Tangent of the loss angle		
Dielectric strength		
Insulation resistance		
Solderability	S-3	2.5%


■ Test Method And Performance

No.	Item		Performance	Test Method (GB/T14472, IEC 60384-14)
1	4.5 Solderability		Good quality of tinning	Solder temperature: 245°C ±5°C Immersion time: 2.0s±0.5s
2	4.3 Terminal strength		There shall be no visible damage	Tense: 0.50<d≤0.80, 10N 0.80<d≤1.25, 20N Bend: 0.50<d≤0.80, 5N 0.80<d≤1.25, 10N The terminals shall be bent 2 times in each direction
3	4.4 Resistance to solder heat		There shall be no visible damage $\Delta C/C \leq \pm 5\%$ (relative to the initial value)	Solder temperature: 260°C ±5°C Immersion time: 10s±1s
4	4.20 Solvent resistance of the marking		The marking shall be legible	Solvent: Industrial isopropanol. Solvent temperature: 23°C ±5°C Dipping time: 5min±0.5min Condition: scrub Scrub material: absorbent cotton Reverting time: No
5	4.2 Initial measurement		Capacitance, Tgδ	
	4.6 Rapid change of temperature		There shall be no evidence of deterioration.	T _A =-40°C, T _B =+110°C 5 cycles Duration: t=30min
	4.7 Vibration		There shall be no evidence of deterioration.	Amplitude 0.75mm or acceleration 100m/s ² (whichever is the smaller severity), f: 10Hz to 500Hz. Three directions, 2h for each direction, total 6h.
	4.8 Bump		There shall be no evidence of deterioration.	4 000 times, Acceleration: 400m/s ² , Pulse duration, 6ms
	Final measurement		There shall be no visible damage $\Delta C/C \leq \pm 5\%$ (relative to the initial value)	
6	4.11 Climate sequence	Initial measurement		
		Dry heat		+110°C, 16h
		Damp heat, Cyclic		Test Db, Severity: b, the first cycle
		Cold		-40°C, 2h
		Damp heat, cyclic other		Test Db, Severity b, the other cycles
		Final measurement	There shall be no visible damage, legible marking $\Delta C/C \leq \pm 5\%$ (relative to the initial value) Increase of tgδ: C _N ≤1μF: ≤0.008 (10kHz) C _N >1μF: ≤0.005 (1kHz) Dielectric strength : there shall be no permanent breakdown or flashover I.R.: ≥ 50% of the rated value	

No.	Item	Performance	Test Method (GB/T14472, IEC 60384-14)
7	4.12 Damp heat steady state	There shall be no visible damage, legible marking $\Delta C/C \leq \pm 5\%$ (relative to the initial value) Increase of $\tan \delta$: $C_N \leq 1 \mu F$: ≤ 0.008 (10kHz) $C_N > 1 \mu F$: ≤ 0.005 (1kHz) Dielectric strength : there shall be no permanent breakdown or flashover I.R.: $\geq 50\%$ of the rated value	Temperature: $40^\circ C \pm 2^\circ C$ Humidity: $93 \pm 3\% RH$ Duration: 56 days
8	4.13 Impulse voltage	There are three or more waveforms which indicate that no self-heating breakdown have occurred when it is monitored by the monitor	Each individual capacitor shall be subjected to 24 impulses of the same polarity (when any three successive impulses are shown by the monitor to have a wave form indicating that no self-heating breakdown have taken place the impulses can be stopped), the time between impulses shall not be less than 10S, and the peak value of the voltage impulse: 2.5kV (suitable for $C_N \leq 1 \mu F$; When $C_N > 1 \mu F$, the capacitor can endure pulse voltage value is $2.5 / \sqrt{C_N}$ kV)
9	4.14 Endurance	There shall be no visible damage, legible marking $\Delta C/C \leq \pm 10\%$ (relative to the initial value) Increase of $\tan \delta$: $C_N \leq 1 \mu F$: ≤ 0.008 (10kHz) $C_N > 1 \mu F$: ≤ 0.005 (1kHz) Dielectric strength : There shall be no breakdown or flashover I.R. : $\geq 50\%$ of the rated value	$+110^\circ C$, $1.25 U_R$ Va.c., 1 000h The voltage shall be subjected to 1000Vrms for 0.1s every one hour during test.
10	4.15 Charging and discharging	$\Delta C/C \leq \pm 10\%$ (relative to the initial value) Increase of $\tan \delta$: $C_N \leq 1 \mu F$: ≤ 0.008 (10kHz) $C_N > 1 \mu F$: ≤ 0.005 (1kHz) I.R.: $\geq 50\%$ of the rated value	Times: 10 000 Duration of charging: 0.5s Duration of discharging: 0.5s Charging voltage: $\sqrt{2} U_R$ Vd.c. Charging resistance: $220/C_N (\Omega)$ or the current $\leq 1.0A$ (whichever is the minor) Discharging resistance: $R = \frac{\sqrt{2} U_R}{C_N \times \frac{dU}{dt}} (\Omega)$ C_N : Capacitance (μF) $dU/dt (V/\mu s)$: 100V/ μs
11	4.17 Passive flammability	The flaming time of each capacitor shall not go beyond 10s after it is taken apart from the flame. Drop of each capacitor caused by flame shall not fire the tissue below.	Ref.item 4.17 Needle flame test The category of flammability: B Expose time: 1 time Capacitor Volume Exposing time $250 < V (mm^3) \leq 500$ 20s $500 < V (mm^3) \leq 1750$ 30s $V (mm^3) > 1750$ 60s

No.	Item	Performance	Test Method (GB/T14472, IEC 60384-14)
12	4.18 Active flammability	The cheese cloth around the capacitor shall not burn with a flame.	The specimens shall be individually wrapped in at least 1, but not more than 2, complete layers of cheesecloth, the cheesecloth shall be untreated pure cotton cloth. Each sample shall be subjected to 20 discharges, the interval between successive discharges shall be 5s. $U_i = 2.5kV_0^{+7\%}$ U_R be applied and be maintained for 120_0^{+10} s after the last discharge.

■ Marking

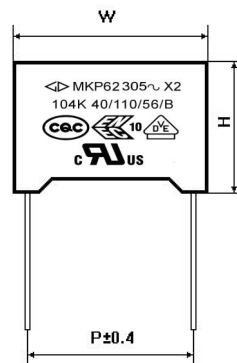


Marking Introduction

Sign	explain	Sign	explain
	Brand	40/110/56/B	Climate category / Passive Flammability Class
MKP62	Type		ENEC-VDE Approval
305~	Rated voltage		CQC Approval
X2	Class		UL, CUL Approval
104K	Rated capacitance and tolerance		

Taping specification for box-type capacitors

Outline Drawing

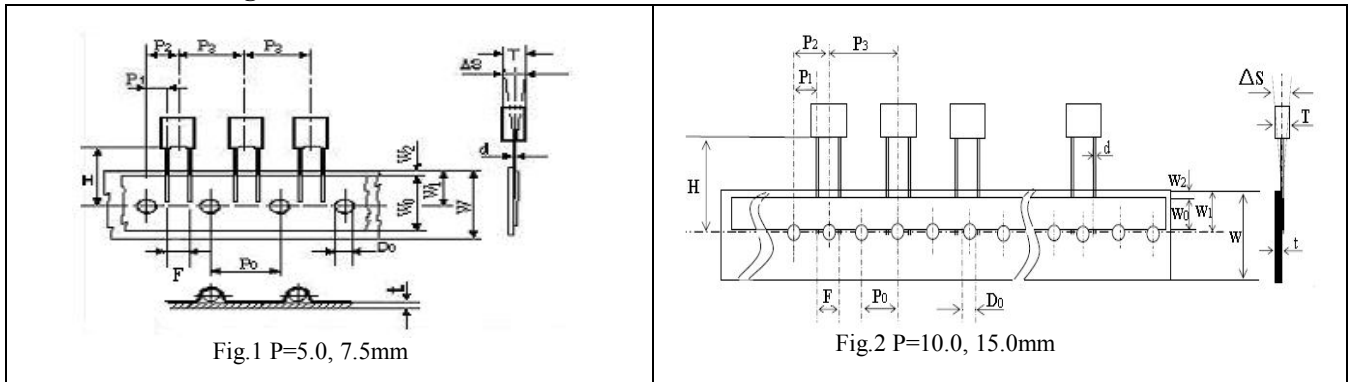

Taping Dimensions(mm)

Technology index title	Code	Dimensions				
		P=5.0	P=7.5	P=10.0	P=15.0	Tolerance
Taping type	—	Fig 1	Fig 1	Fig2	Fig 2	—
Part number	Ammo-pack	A201	A301	A405	A605	
Taping pitch	P ₃	12.7	12.7	25.4	25.4	±1.0
Feed hole pitch	P ₀	12.7	12.7	12.7	12.7	±0.3
Center of wire	P ₁	3.85	2.6	7.7	5.2	±0.7
Center of body	P ₂	6.35	6.35	12.7	12.7	±1.3
Pitch of taping wire	F**	5.0	7.5	10.0	15.0	+0.6 -0.1
Component alignment	△S	0	0	0	0	±2.0
Height of component from tape center	H***	18.5	18.5	18.5	18.5	±0.5
Carrier tape width	W	18.0	18.0	18.0	18.0	+1.0 -0.5
Hold down tape width	W ₀	6min	10min	10min	10min	—
Hole position	W ₁	9.0	9.0	9.0	9.0	±0.5
Hold down tape sition	W ₂	3max	3max	3max	3max	—
Feed hole dia.	D ₀	4.0	4.0	4.0	4.0	±0.2
Tape thickness	t	0.7	0.7	0.7	0.7	±0.2

Packing Quantity

Pitch (mm)	Box thickness T(mm)	Ammo-pack (pcs/box)	
		Domestic	Export
5.0	2.5	2500	2 000
	3.5	1 700	1 500
	4.5	1 400	1 300
	5.0	1 200	1 000
	6.0	1 000	800
7.5	3.5	1 700	1 500
	4.0	1 500	1 350
	5.0	1 200	1 050
	6.0	1 000	850
10.0/15.0	4.0	750	650
	5.0	600	500
	6.0	500	450
15.0	7.5	400	350
	8.5	350	300
	10.0	300	250
	11.0	250	220


Note: * P₀=15mm is also available;

**F can be other lead spacing;

***H=16.5mm is available;


Packing box sizes(mm)

1. Out packing box for bulk




L:375±5
B:375±5
H:265±5

2. Inner packing box for bulk

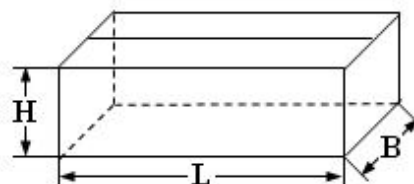

L:355±3
B:175±3
H:118±3

3. Box sizes for Ammo-pack



L:330±3
B:48±3
H:260±3