



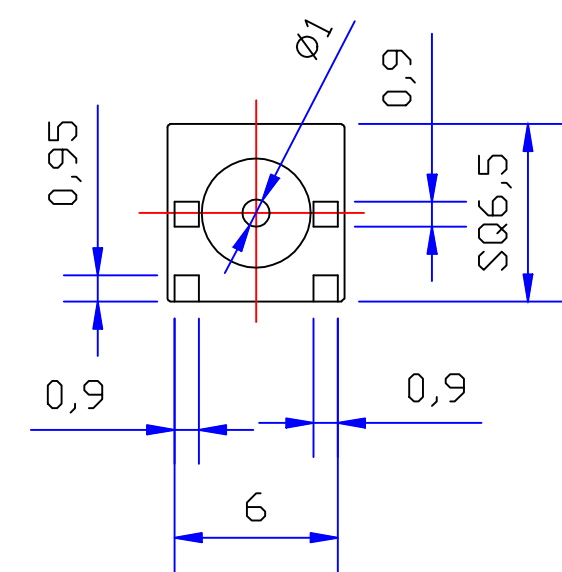

Product NO.		DOSIN-806-0111		
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. CHEN	2015/03/16	John kine

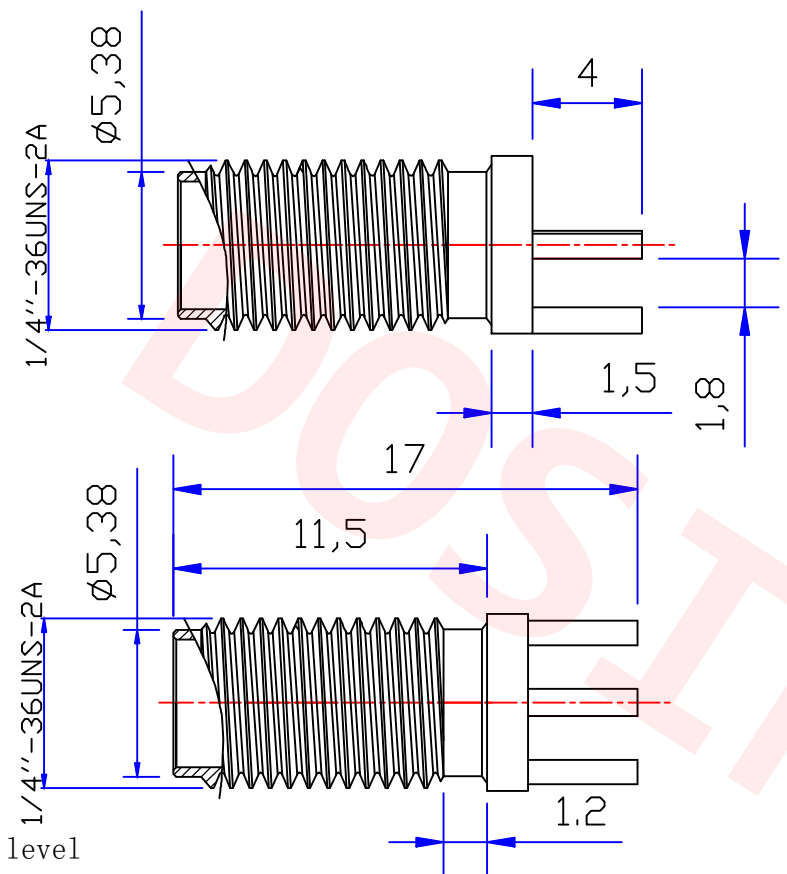

Specifications:
 IMPEDANCE: 50 Ohms
 Frequency range: 0~6GHZ
 VSWR: 1.5MAX
 Working voltage: 500V rms @ sea level
 Insulation resistance: 5000 Ohms min
 Temperature range: -65°C TO +165°C
 Relative temperature: ≤95% (40° C ± 2° C)

1	Body	Brass	GOLD-NICKEL	NOTE:	Tolerance	X.	±0.15
2	Insulator	TEFLON	White			X.X	±0.10
3	Center contact	Brass	GOLD			X.XX	±0.05
4						Angular	±5°
5				DRAWN	View		
6				Zelin. CHEN			
7				CHECKED			
8				APPROVALS	UNIT	MM	
9				John			
10	Component Number	Material	Finish	APPROVALS	SCALE	1:1	
NO				John			

Dosing Industrial (H.K) Co. Ltd
 东莞市德索五金电子制品有限公司
Dosing Hardware Electronics Co., Ltd

E-mail: dosin2005@163.com
 dosin2005@dosing-china.com
 Web: http://www.dosingconn.com
 TEL: (0086) 769-81153906
 FAX: (0086) 769-81875836

Name: SMA JACK FOR PCB

SIZE	Product NO.	REV
A	DOSIN-806-0111	A

DateTime: 2017/03/16
 CAD FILE: H/company drawings/BD
 SHEET: 1 OF 1