

SENCITY® Spot-L 2x2 WiFi MIMO Antenna

1355.17.0001

Properties

- Directional high gain antenna for Wi-Fi or Cellular bands between 4900 MHz and 6100 MHz
- Gain of 23 dBi with Vertical/Horizontal polarization
- Including wireless access in vehicular environments IEEE 802.11p (5.85-5.925 GHz)
- Also, for public safety wireless networks and Wi-Fi band IEEE 802.11 a/h/n for Japan (4.9 GHz band)
- Half power beamwidth of 10° (vertical) and 10° (Horizontal)



Electrical bands		
	Band 1	Band 2
Frequency	4900 MHz ... 5150 MHz	5150 MHz ... 6100 MHz
VSWR	2	2
Impedance	50 Ω	50 Ω
Gain	22 dBi	23 dBi
HPBW vertical	10 °	10 °
HPBW horizontal	10 °	10 °
Isolation between Ports	35 dB	35 dB
Front to back ratio	30 dB	30 dB
Ambient Temperature	25 °C	
Composite Power max	6 W	

Electrical remarks	
Remarks	Side lobes level ETSI EN 302 326-3 V1.1.2 DN3 Cross polarization ETSI EN 302 326-3 V1.1.2 DN3

Ports		
	Port 1	Port 2
Port name	HOR	VER
Connector	N, jack (female)	N, jack (female)
Polarization	horizontal	vertical

SENCITY® Spot-L 2x2 WiFi MIMO Antenna

1355.17.0001

Ports		
	Port 1	Port 2
DC grounded	Yes	Yes

Connections		
Port number	Port 1	Port 2
Band 1	✓	✓
Band 2	✓	✓

Mechanical data	
Weight	1.2 kg
Dimensions	305 mm x 305 mm x 15 mm (Height x Width x Depth)
Windload	front: 263 N at 160 km/h, lateral: 13 at 160 km/h, Wind Speed survival: 220 km/h

Interface and material data	
Radome material	Plastic
Radome colour	RAL 9002 (grey-white)
Back plate/base plate material	Aluminum

Environmental data	
Operation temperature	-45 °C ... 70 °C
Storage temperature	-45 °C ... 70 °C
Transport temperature	-45 °C ... 70 °C
Environment (application)	Indoor/Outdoor
Ingress protection (IP Rating)	IP67
Flammability rating	UL 94-HB


Environmental remarks	
Humidity ETSI EN300-2-4 T4.1E 144h 95%	
Solar radiation ASTM G53 2000 h	
Salt spray IEC 60068-2-11 Ka 500 h	
Mechanical shock IEC 60721-3-4 4M5	
Vibration IEC 60721-3-4 30 min/axis random 4M5	
Low temperature IEC 60068-2-1 72h -55°C	
High temperature IEC 60068-2-2 72h +71°C	
Temperature cycling IEC 60068-2-14 1h -45 to +70°C 3 cycles	

SENCITY® Spot-L 2x2 WiFi MIMO Antenna

1355.17.0001

Outline drawing

Diese Zeichnung ist unser geistiges Eigentum und darf ohne unsere Einwilligung weder kopiert, reproduziert, noch Dritten weitergegeben oder in irgendeiner Weise zugänglich gemacht werden. Diese Zeichnung ist unser geistiges Eigentum und darf ohne unsere schriftliche Genehmigung nicht weitergegeben werden. This drawing is our intellectual property and must not be used for any other purpose than which it was supplied, or be reproduced without written permission of the owners.

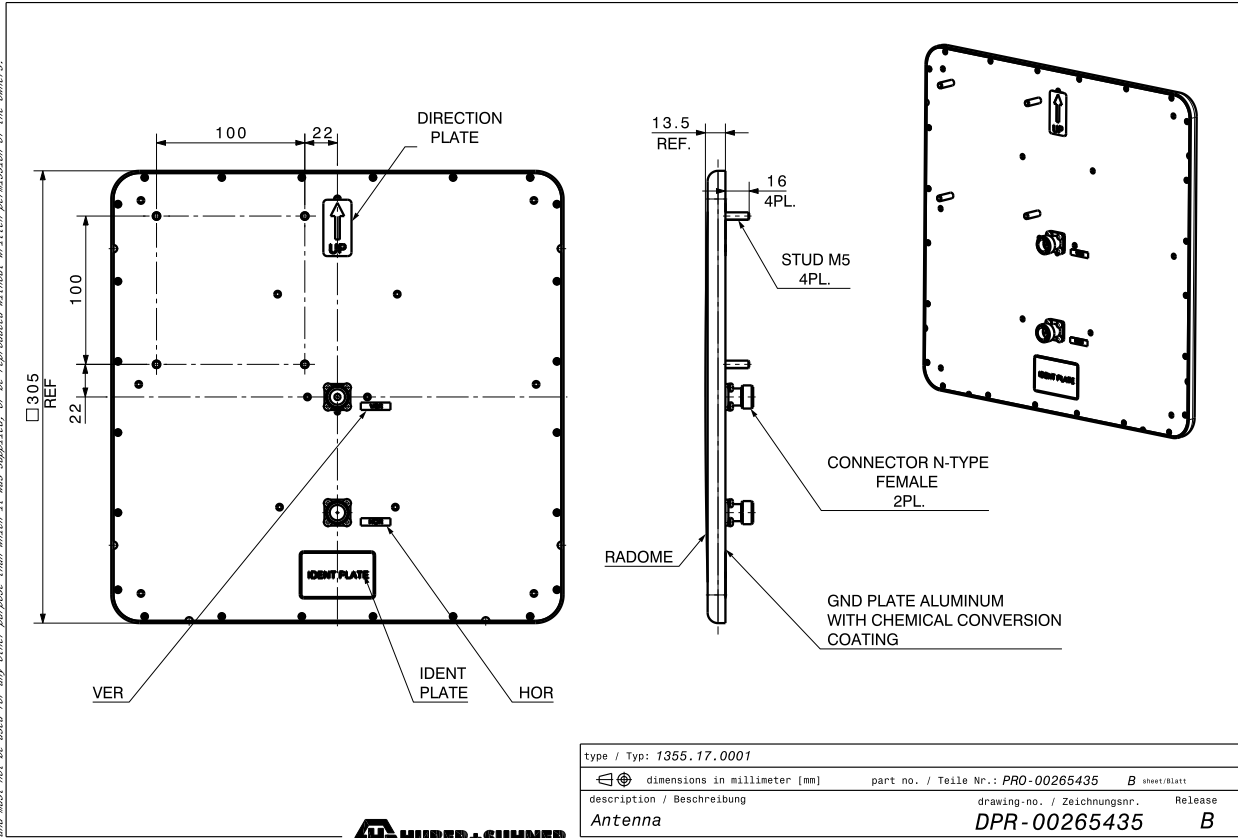

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind. DOCUMENT PIM-P3296 / Date of publication: 20.06.2024 / uncontrolled copy