




SCALE:2/1




Schematic Diagram of 2-Hole




Schematic Diagram of 3-Hole




Schematic Diagram of 4-Hole






Schematic Diagram of 5,6-Hole



Schematic Diagram of 7, 8, 9-Hole

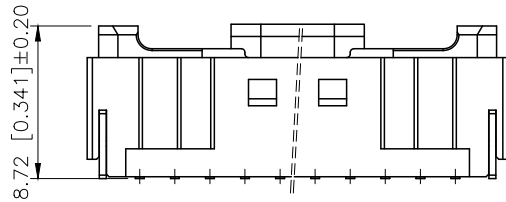

Schematic Diagram of 10,11,12,13,14,15-Hole

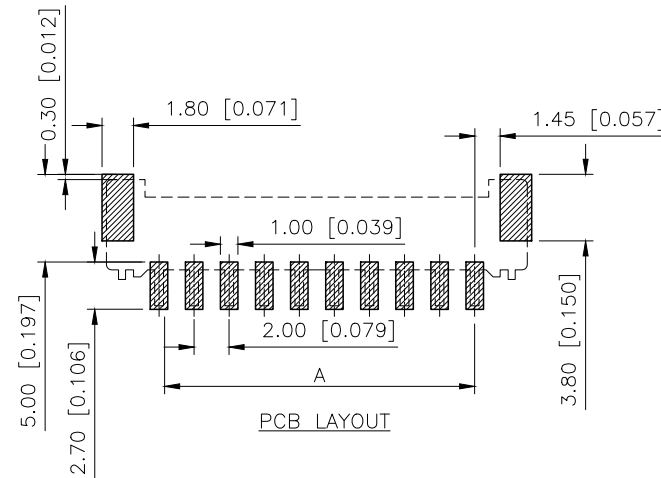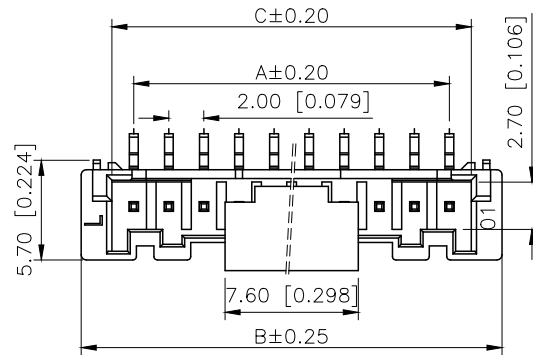

PCB LAYOUT

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.11.27	阿树

■SPECIFICATIONS

- Voltage rating:250V AC/DC
- Current rating:3A AC/DC
- Withstanding Voltage:800V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤20mΩ

PART NO.:

X2000 W V S-XX-6T SN
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
- ②Category:W-Wafer
- ③Welding Board Angle:V-Stright 180°
- ④Welding Way:S-SMT
- ⑤Row No.Pin No:XX-02~15Pin
- ⑥Material: 6T-PA6T UL94V-0
- ⑦Planting:SN-Tin Plated

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	2.00	8.00	4.55	09	16.00	22.00	18.55
03	4.00	10.00	6.55	10	18.00	24.00	20.55
04	6.00	12.00	8.55	11	20.00	26.00	22.55
05	8.00	14.00	10.55	12	22.00	28.00	24.55
06	10.00	16.00	12.55	13	24.00	30.00	26.55
07	12.00	18.00	14.55	14	26.00	32.00	28.55
08	14.00	20.00	16.55	15	28.00	34.00	30.55

X2000WVS-XX-6TSN	PA6T	Brass	X2000HM
PART NO	Material	Material(Pin)	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	2.00mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	X2000WVS-XX-6TSN
APPROVED		SIZE:	A4	DWG NO.:	