


IMPEDANCE ( Z )			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	95 Ω	250 Ω	420 Ω
Minimum	- Ω	200 Ω	- Ω

Z vs. FREQUENCY  
(REF. ONLY)

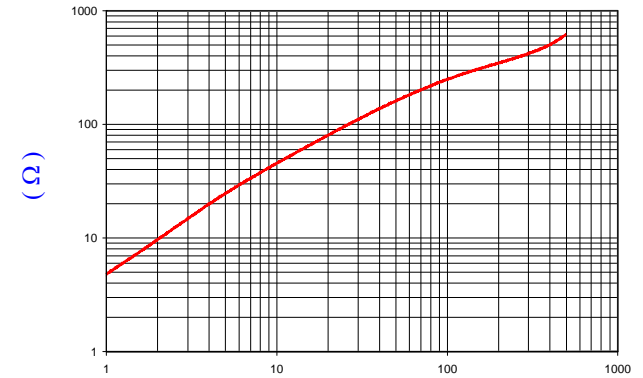

FREQUENCY (MHz)

AGILENT E4991A Impedance/Material Analyzer  
HP 16092A-Test Fixture, REF #3399

NOTES:

1. ASSEMBLED PART #: 28A2029-0A0
2. CASE COLOR: WHITE - "0A0"
3. CASE FLAMMABILITY RATING: UL94 V-2.
4. CORE DIMENSIONS REFER TO 28A2029-000 SPEC. FERRITE CORE DIMENSION IS FOR INTERNAL PURPOSE TO ENHANCE FITTING TO CASE AND ELECTRICAL CHARACTERISTICS ONLY.
5. COSMETIC SPECIFICATION REFER TO WI-QA-038.

CASE DIMENSIONS:

A	22.28 [.877]	±	1.00 [.039]
B	10.00 [.394]	±	1.00 [.039]
C	32.77 [1.290]	±	1.00 [.039]
D	21.84 [.860]	±	1.00 [.039]
E	4.30 [.170]	±	Ref.

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.				
REV	DESCRIPTION	DATE	INT					PROJECT/PART NUMBER:
X	UPDATE CASE DIMENSIONS REMOVE CORE DIM AND ADD NOTE 4&5	01/13/14	Jcai	28A2029-0A0		X	FERRITE SNAP-ON	JAZ
W	UPDATE CORE DIM C	07/06/12	Jcai	DATE:	01/16/02	SCALE:	NTS	MATERIAL:
V	UPDATE LOGO AND ADD NOTES 3	12/16/11	Jcai	CAD #	28A2029-0A0-X	TOOL #	-	Ferrite
U	UPDATE 100MHz MINIMUM VALUE	07/17/07	TMB					
T	UPDATE COMPANY LOGO	04/18/07	TMB					
REV	DESCRIPTION	DATE	INT					