

NOTES1:

- UL Standard  
 1. Rated voltage/current : 600V / 41A  
 2. Withstanding voltage : AC2200V/1Min.  
 3. Torque value : M3 , 7.0lb.in  
 4. Wire range : 24~8AWG(str)  
 24~10AWG(sol)

IEC Standard

1. Pollution degree 2 2 3  
 Overvoltage category II III III  
 Rate impulse voltage(kV) 6kV 6kV 6kV  
 Rate voltage(V) 1000V 1000V 1000V  
 Rate current(A) 41A  
 2. Torque value : M3 , 0.8N·m  
 3. Wire range : 0.5~6mm<sup>2</sup>

NOTES2:






1. Dimension shall be interpreted per ASME Y14.5-2009  
 2. Pitch : 7.62mm, Poles : N=02~12P  
 3. Stripping length : 11mm  
 4. Operating temperature: -40°C~+105°C  
 5. Undimensioned tolerances:

Pitch range	Nominal dimension		range		mm
	Over	TO	Over	TO	
6	10	TO	30	60	100
10	10	TO	30	60	150
24	30	TO	60	100	150
±0.15/±0.20/±0.30/±0.30/±0.50/±0.70/±1.00/±1.30					±2°

6. RoHS Compliance

Ordering Information

JL5EDGKHM-762 XX G 0 1

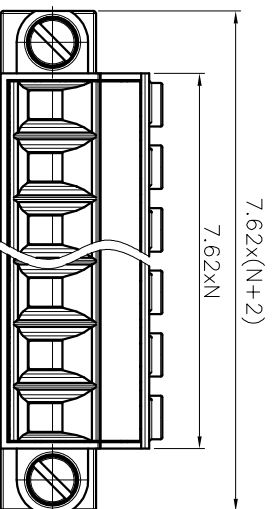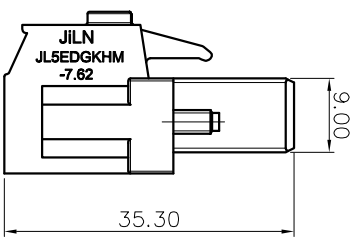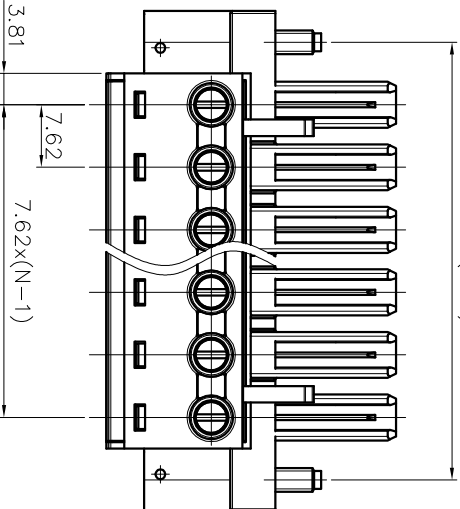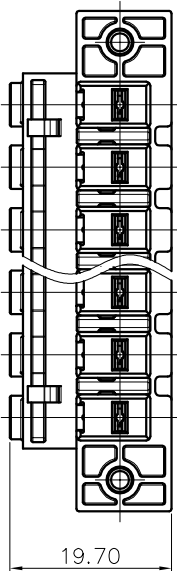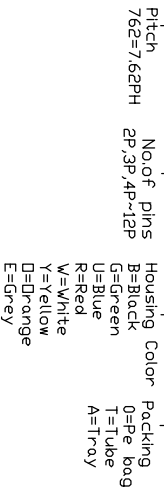

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		20.12.9

DRAW	SHUANGPING ZHENG		SCALE	FIT	PART NO.	JL5EDGKHM-762XXG01
	CHECK	LICHAD LIU	UNIT	mm		
APPROVE	YONGLIANG GAO	SIZE	A4	SHEET	1/1	TITLE:
		PRDJ				JL5EDGKHM-762-XXP 插拔式母座/绿色/带耳

**JILIN** 东莞市锦凌电子有限公司  
 DONGGUAN JINLING ELECTRONIC CO., LTD