




CHIP COMMON MODE CHOKE

High Common Mode Impedance at High Frequency.
Excellent Noise Suppression Performance.
Small Size and Low Profile, Surface Mount Type.
Operating Temperature Range: -40 °C to +85 °C.
RoHS Compliant.


Part Number	Electrical Specifications @25°C				
	Common mode Impedance (ohm ±25%@100M)	DCR (Ω Max)	Rated Current mA Max	Rated Volt (Vdc)	IR M(Ω Min)
UTC2012C08 Q	800	0.88	300	125	10

MECHANICAL

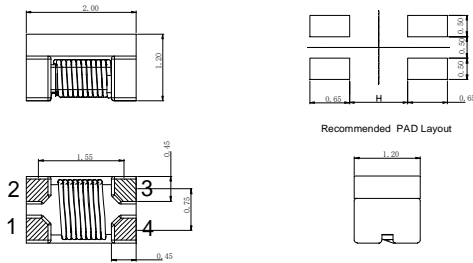


Dimension: mm


SCHEMATICS




IMPEDEANCE FREQUENCY

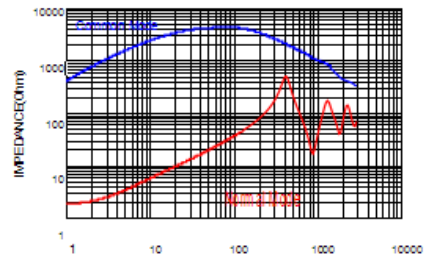

TAPING AND PACKING

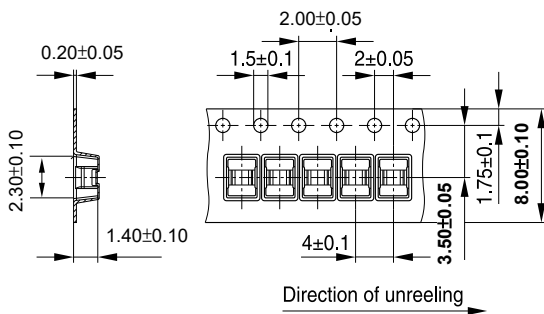

Reel

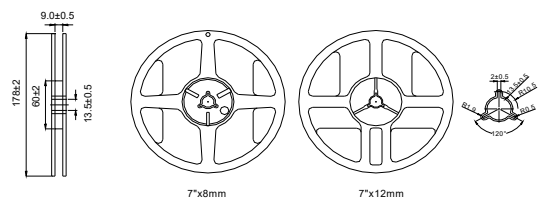

Quantity (pcs):
2000 PCS PER REEL
10 REELS PER CARTON
10000 PCS PER CARTON

Dimensions in mm