


# ROHS-COMPLIANT

USB 3.0 A/M 9PIN  
INS:BLUE(PT 300C)

USB 3.0 B/M 9PIN  
INS:BLUE(PT 300C)

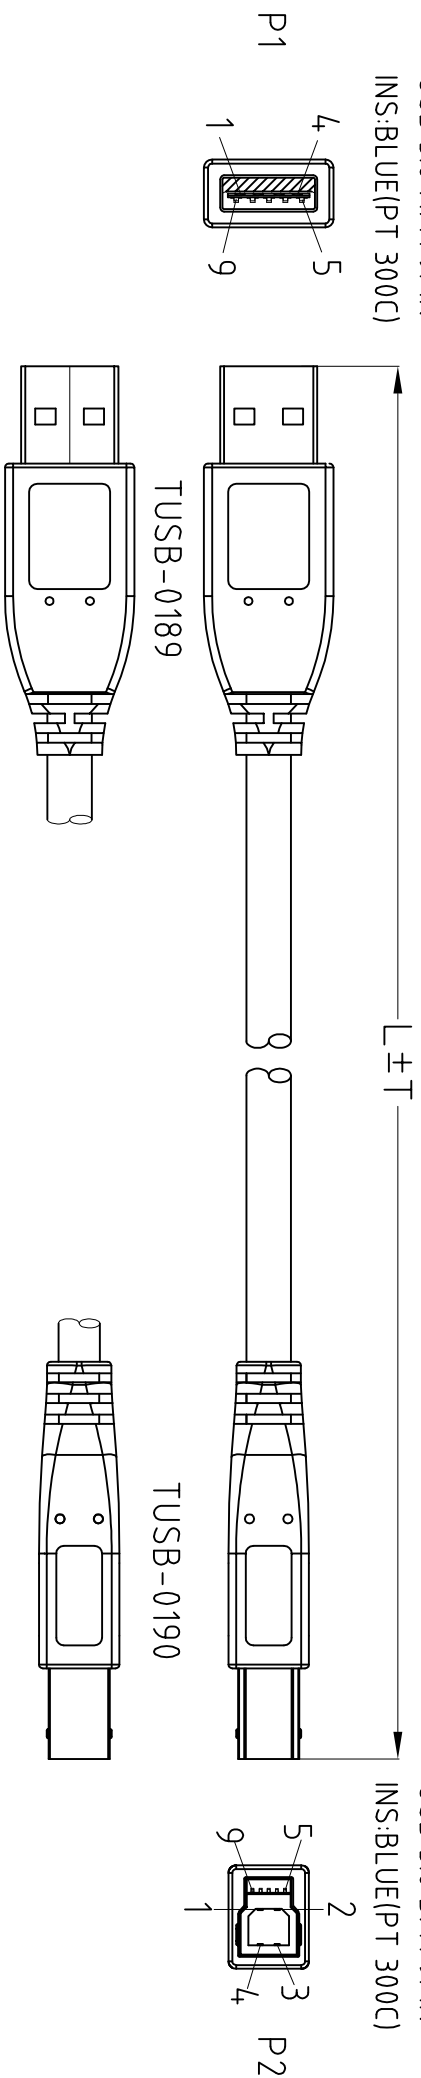

**NOTE:**

- 1.CABLE: UL-2725 [#28(7/0.127 T.C)×1P INS:Foam-PE+D.W(7/0.127 T.C)  
+AL/MY+Hot-melt-Mylar]×2C+#28(7/0.127 T.C)×1P INS:Polyolefin  
+#28(7/0.127 T.C)×2C INS:Polyolefin+AL/MY+B.D(85%)  
PVC JACKET; OD:5.2±0.15mm COLOR:BLACK(NK-K01) REV 3.0.
- 2.CONNECTOR:  
P1: USB 3.0 A TYPE MALE 9PIN CONTACT:30U",SHELL:NI-PLATED.  
P2 :USB 3.0 B TYPE MALE 9PIN CONTACT:30U",SHELL:NI-PLATED.
- 3.HOOD:MOLDED TYPE,PVC 45P, COLOR:BLACK(NK-K01).
- 4.ELECTRICAL TEST:

- (1)100% OPEN SHORT & MIS WIRE TEST.
  - (2)CONTACT RESISTANCE 3 ohm Max .
  - (3)INSULATION RESISTANCE 10M ohm Min .
  - (4)HI-POT DC300V
- 5.PACKING:EACH PC / POLY BAG.

PIN OUT	
P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
SHELL	SHELL

Tolerance	Inch	M/M
X	.015	.30
XX	.010	.10
XXX	.005	.05

Color	Function
RED	PWR
WHITE	UTP_D-
GREEN	UTP_D+
BLACK	GND_PWRrt
BLUE	SDP1-
YELLOW	SDP1+
D.W	SDP1_Drain & SDP2_Drain
PURPLE	SDP2-
ORANGE	SDP2+
B.D	

2DIRECCT GMBH	
Title USB 3.0 A/M - B/M CABLE	
Customer P/N	
Draw FANNIE 11/12/09	Customer: E-DIR
Check	App'd
Engr	Scale  NONE
DWG	Units  M/M
L(mm)	Third Angle Projection
T(mm)	REF: I
	Sheet: 1/1

LTR	REV.	DESCRIPTION	DATE