

AMP Signal Double Lock

TE Internal #: 917722-1

PCB Mount Header, Vertical, Wire-to-Board, 2 Position, 2.5 mm [.098 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, AMP Signal Double Lock

[View on TE.com >](#)



Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Assembly Type: **PCB Mount Header**

Connector System: **Wire-to-Board**

Number of Positions: **2**

Number of Rows: **1**

Centerline (Pitch): **2.5 mm [.098 in]**

Features

Product Type Features

PCB Connector Assembly Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Positions	2
Number of Rows	1
PCB Mount Orientation	Vertical

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Body Features

Connector Profile	High
Primary Product Color	Natural



Contact Features

Contact Mating Area Length	4.7 mm[.18 in]
Mating Square Post Dimension	.64 mm[.025 in]
PCB Contact Termination Area Plating Material Thickness	.8 – 2.5 µm[31.49 – 98.42 µin]
Contact Layout	Inline
Contact Underplating Material Thickness	.5 – 1.2 µm[19.68 – 47.24 µin]
Contact Mating Area Plating Material Thickness	.8 µm[31.49 µin]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Square
Contact Mating Area Plating Material Finish	Matte
Contact Underplating Material	Copper
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Tin
Contact Type	Pin
Contact Current Rating (Max)	3 A

Termination Features

Square Termination Post & Tail Dimension	.64 mm[.025 in]
Termination Post & Tail Length	3.2 mm[.126 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

PCB Mount Alignment Type	Boss
Mating Alignment Type	Polarization
Mating Retention	With
PCB Mount Retention Type	Kinked
Mating Retention Type	Latch
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Retention	With

Housing Features

Housing Material	Nylon 6/6 GF
------------------	--------------



Centerline (Pitch)	2.5 mm[.098 in]
--------------------	-----------------

Dimensions

Connector Length	7.5 mm[.29 in]
Connector Height	15.3 mm[.6 in]
Connector Width	8.2 mm[.32 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]

Usage Conditions

Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

Glow Wire Rating	Glow Wire
Compatible With Agency/Standards Products	CSA, UL
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	300
Packaging Method	Bag, Box

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent



chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 5-917686-1
2.5 SIGNAL D/LOCK PLUG HSG 2P (GWT)



TE Part # CAT-SI261-P729
STD Temp Signal Double Lock Plug



TE Part # 2-1376274-1
2.5 SDL STD HDR ASSY 2/4P

Also in the Series | AMP Signal Double Lock



Connector Caps & Covers(1)



Connector Contacts(14)




Connector Hardware(19)



Connector Seals & Cavity Plugs(10)



Insertion & Extraction Tools(1)

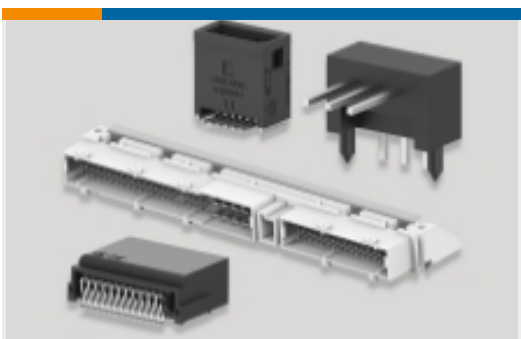


PCB Headers & Receptacles(146)



Rectangular Connector Housings(23)



Rectangular Power Connectors(1)

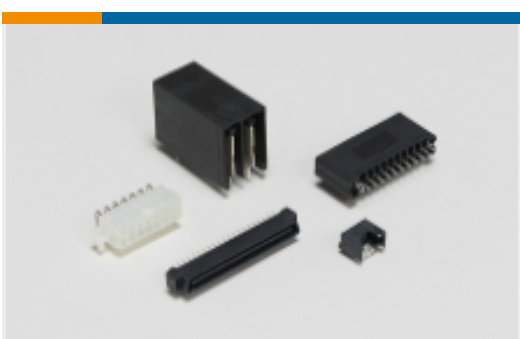

Standard Rectangular Connectors(1)



Wire-to-Board Connector Assemblies & Housings(76)



Customers Also Bought

TE Part #1971845-4
4P, RAST 5 Tab Header, THV

TE Part #917728-1
2.5 SIGNAL D/LOCK HDR ASSY 8P

TE Part #917723-1
2.5 SIGNAL D/LOCK HDR ASSY 3P

TE Part #1897294-2
ECU 154P HDR ASSY

TE Part #179848-1
AMP POEWR D/LOCK T/HDR ASSY 4P

TE Part #2232532-4
4P, PL RAST 5 Tab Header, TH,Vertical

TE Part #353351-1
2.5 S.D.L HDR ASSY 4P STD 5MM

TE Part #1-2232532-2
2P, PL RAST 5 Tab Header,TH, Vertical

TE Part #2-2372858-2
2P, RAST5 P-LOCK HEADER ASSY, OPPOSITE

TE Part #2-2372858-4
4P, RAST5 P-LOCK HEADER ASSY, OPPOSITE

Documents

Product Drawings

2.5 SIGNAL D/LOCK HDR ASSY 2P

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_917722-1_H.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_917722-1_H.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_917722-1_H.3d_stp.zip

English

3D PDF



English

Customer View Model

[ENG_CVM_917722-1_F.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_917722-1_F.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_917722-1_F.2d_dxf.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG](#)

English

[1773458-3_2.5MM_SIGNAL_DOUBLE_LOCK_CONNECTORS](#)

English

Product Specifications

[Application Specification](#)

English

Instruction Sheets

[Instruction Sheet \(non U.S.\)](#)

English

[AMP 2.5 SIGNAL DOUBLE LOCK CONNECTOR SERIES](#)

English

Agency Approvals

[UL Report](#)

English