




## Technical Data

22.01.2024

Shrinkable markers "Ladder Style", thermal transfer  
TLFX DS – 2:1 Rail Limited Fire Hazard "Ladder Style"

TLFX48DS-2x25YE

Article Number 553-60031

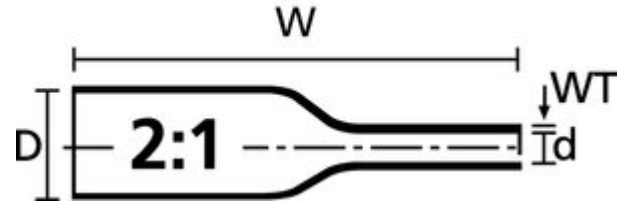

Material: Polyolefin, cross-linked (PO-X)

Colour: Yellow (YE)

Supplied  $\varnothing$  D min.: 4.8 mm

Recov.  $\varnothing$  d max.: 2.4 mm

Wall (WT): 0.635 mm

Shrink Ratio: 2:1

Min. Shrink Temperature - °C: +100 °C

Test Method

Flammability: UL 224

Operating Temperature : -55 °C to +105 °C

Dielectric Strength: 20 kV/mm

ASTM D2671

Tensile Strength: 11 MPa

ASTM D2671

Elongation at break: 200 %

ASTM D2671

Longitudinal Change After Shrinkage: -5% max.

UL 224

We assume no responsibility that the Product will be used for the intended purpose, this is beyond our control. It's up to the customer to check the suitability for a specific application by means of tests. Technical changes and errors reserved



## Technical Data

22.01.2024

Shrinkable markers "Ladder Style", thermal transfer  
TLFX DS – 2:1 Rail Limited Fire Hazard "Ladder Style"

Print Method: thermal transfer print  
Print Method (Alternative): laser beam print  
Application Tool: H6100, TT431, TT4030, TT4030DS

Shelf Life: 5 years



We assume no responsibility that the Product will be used for the intended purpose, this is beyond our control. It's up to the customer to check the suitability for a specific application by means of tests. Technical changes and errors reserved