
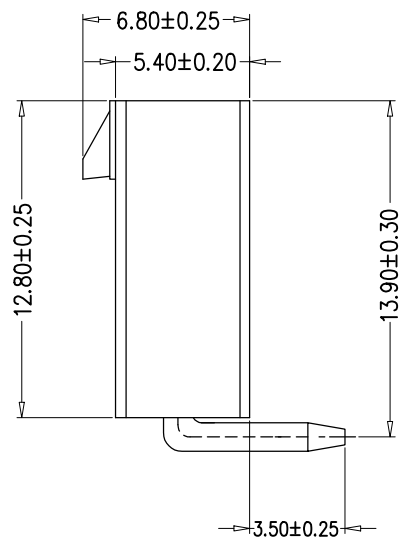




标记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修改 REVISE	日期 DATE	核准 APPROVE

编号	尺寸 (mm)	
	A	B
2AW	4.20	9.60
3AW	8.40	13.80
4AW	12.60	18.00
5AW	16.80	22.20
6AW	21.00	26.40

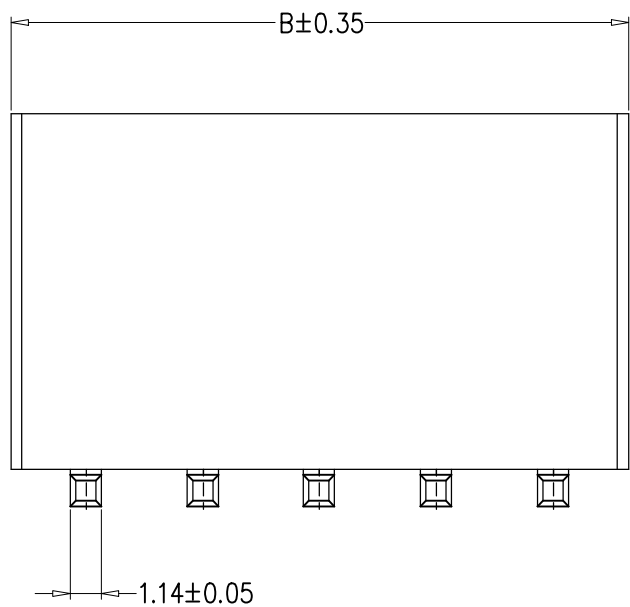



SPECIFICATIONS

- 1.Current Rating: 7A AC, DC
- 2.Voltage Rating: 600V AC, DC
- 3.Temperatuer Range: -25°C~+85°C
- 4.Contact Resistance: 20mΩ Max
- 5.Insulation Resistance: 1000MΩ Min
- 6.Withstanding Voltang: 1500V AC/minute
- 7.Material: Wafer Nylon66
PIN Brass Tin-plated

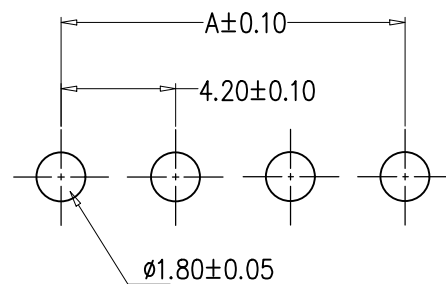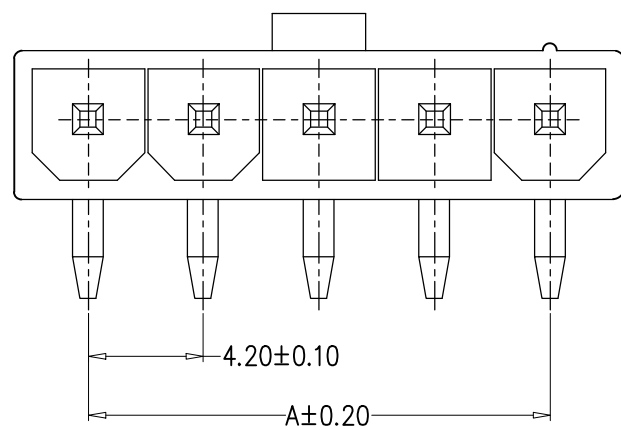

PCB LAYOUT

2	插针	铜	镀锡	
1	基座	PA66	本色	
序号	品名	材质	电镀/颜色	备注

 深圳市虹成电子有限公司 GENERAL TOLERANCES (UNLESS SPECIFIED)	品名 TITLE		针座	
	料号 PART NO		HC-5557-4.2-6AW	
比列 SCALE	1:1			
X.±0.25 X.±2'	单位 UNIT	MM	制图 DRAW	AhYe
.X±0.20 .X±1'	张数 PART NO	1 OF 1	审核 CHECKED	夏操云
.XX±0.15 .XX±0.5'	版本 REV	A	批准 APPROVE	赵亮亮
.XXX±0.10 .XXX±0.5'	