


NOTES:

1. MATERIALS:
 CONTACT: BERYLLIUM COPPER
 ALL OTHER METAL PARTS: STAINLESS STEEL
 INSULATOR: ULTEM1000
2. FINISH:
 CONTACT: GOLD
 ALL OTHER METAL PARTS: PASSIVATED
3. MECHANICAL/ENVIRONMENTAL:
 DURABILITY: 500 CYCLES
4. ELECTRICAL:
 IMPEDANCE: 50Ω
 FREQUENCY RANGE: DC to 40GHz
 VSWR(dB): 1.2:1 (-20.83dB)

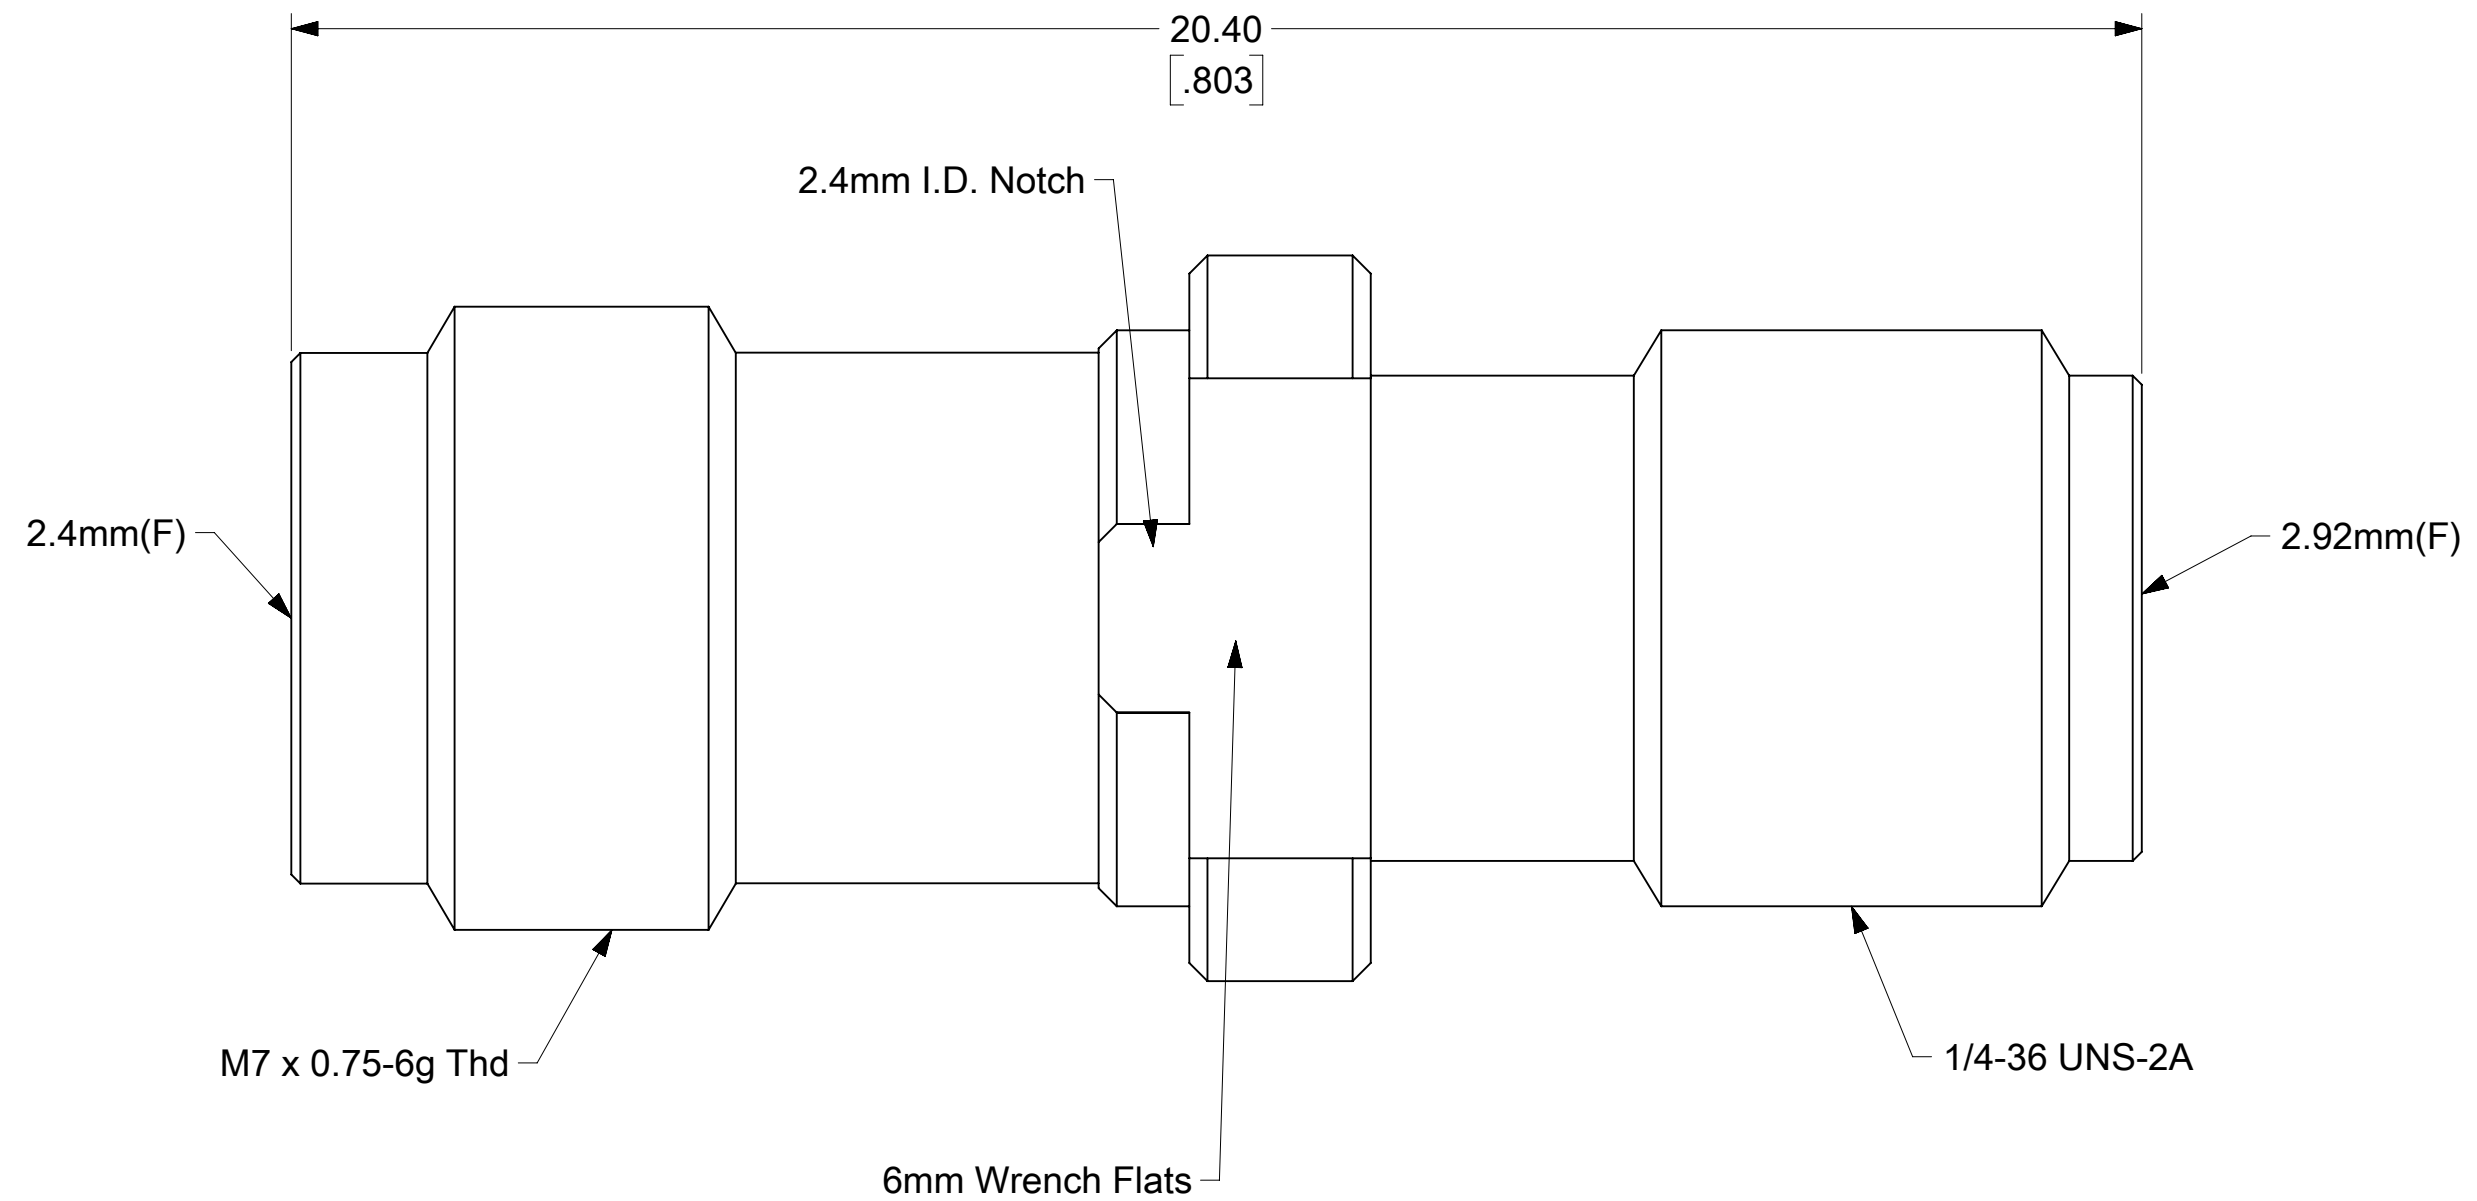

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
	DIMENSION UNITS	SCALE		CURRENT REV DESC: INITIAL RELEASE			molex
$\frac{F}{A} = 0$	MM/INCH	NTS		EC NO: 731858 DRWN: PKH 2022/11/24 CHK'D: JBORRELLI 2022/12/14 APPR: LMEIER 2022/12/15			
$\frac{F}{C} = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)						
$\frac{F}{P} = 0$		MM	INCH	INITIAL REVISION: DRWN: PKH 2022/11/24 APPR: LMEIER 2022/12/15			PRODUCT CUSTOMER DRAWING
DIVISIONAL SYMBOLS	4 PLACES	±	±				
	3 PLACES	±	±	DOCUMENT NUMBER			DOC TYPE
	2 PLACES	±	±	733862360			PSD
	1 PLACE	±	±	SERIES			DOC PART
	0 PLACES	±	±	C-SIZE 73386			REVISION
	ANGULAR TOL	±	°	MATERIAL NUMBER			
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIRD ANGLE PROJECTION	DRAWING	CUSTOMER	SHEET NUMBER
					C-SIZE	73386	1 OF 1