KHU-17D11-110 ! PENDING OBSOLESCENCE

Potter & Brumfield | Potter & Brumfield KHA


TE Internal #: 3-1393123-9

TE Internal Description: KHU-17D11-110=KH

View on TE.com >



Relays & Contactors > Relays > Power Relays

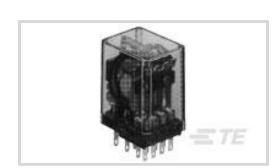

Relay Type: General Purpose Power Relay

Coil Magnetic System: Monostable

Coil Power Rating DC: 1.1 W

Coil Resistance: 110000Ω

Coil Special Features: UL Coil Insulation Class B

Features

Product Type Features

Relay Type	General Purpose Power Relay
Configuration Features	
Coil Special Features	UL Coil Insulation Class B
Contact Arrangement	4 Form C 4PDT-CO
Contact Number of Poles	4
Electrical Characteristics	
Insulation Initial Dielectric Between Open Contacts	1000 Vrms
Insulation Initial Dielectric Between Adjacent Contacts	1500 Vrms
Insulation Initial Dielectric Between Contacts & Coil	1500 Vrms
Insulation Initial Resistance	100 ΜΩ
Coil Power Rating DC	1.1 W
Coil Resistance	110000 Ω
Coil Voltage Rating	110 VDC
Contact Current Rating	2.5 A
Contact Switching Load (Min)	100mA @ 12V
Contact Voltage Rating	240 VAC
Body Features	
Product Weight	45 g[1.587 oz]
Contact Features	



Contact Material	Ag
Termination Features	
Relay Connection Type	Plug-In
Terminal Configuration	Solder Terminals
Mechanical Attachment	
Product Mounting Feature Type	Mounting Studs
Product Mount Type	Socket
Dimensions	
Product Width	21.82 mm[.859 in]
Product Length	28.17 mm[1.1 in]
Product Height	32.54 mm[1.28 in]
Usage Conditions	
Environmental Category of Protection	RTI
Environmental Ambient Temperature (Max)	70 °C[158 °F]
Operating Temperature Range	-45 – 70 °C
Operation/Application	
Current Type	DC
Coil Magnetic System	Monostable
Packaging Features	
Packaging Method	Package
Other	
Length Class (Mechanical)	25 – 30 mm
Environmental Ambient Temperature Class	50 – 70 °C
Height Class (Mechanical)	30 – 40 mm
Coil Power Rating Class	1 – 1.5 W
Width Class (Mechanical)	20 – 25 mm
Contact Current Class	16 A

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant



China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts












Also in the Series | Potter & Brumfield KHA



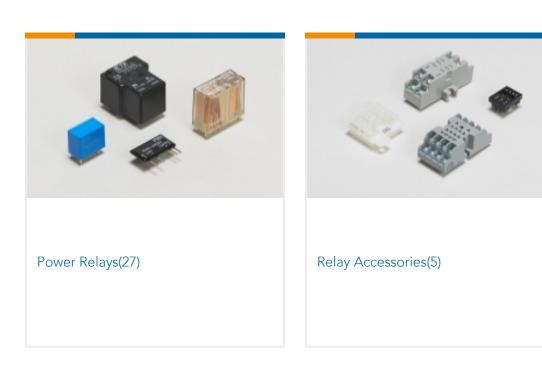

Customers Also Bought













TE Part #4-1393159-8 20C318=SPRING,HOLD-DOWN,K10,.0

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_3-1393123-9_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_3-1393123-9_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-1393123-9_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Datasheets & Catalog Pages

KHA General Purpose Dry Circuit to 5A Multicontact AC or DC Relay

English



Product Specifications
Definitions General Purpose Relays

English