
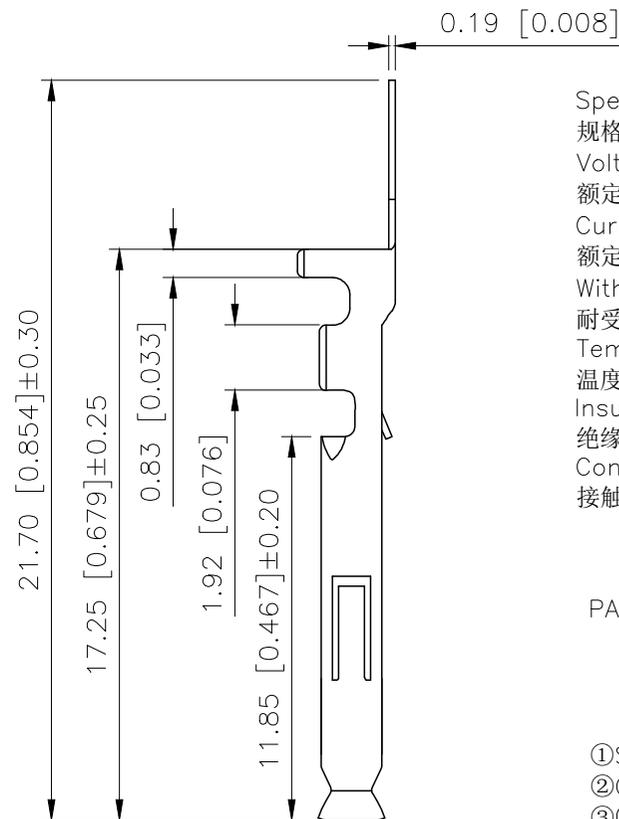


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.2.11	阿树

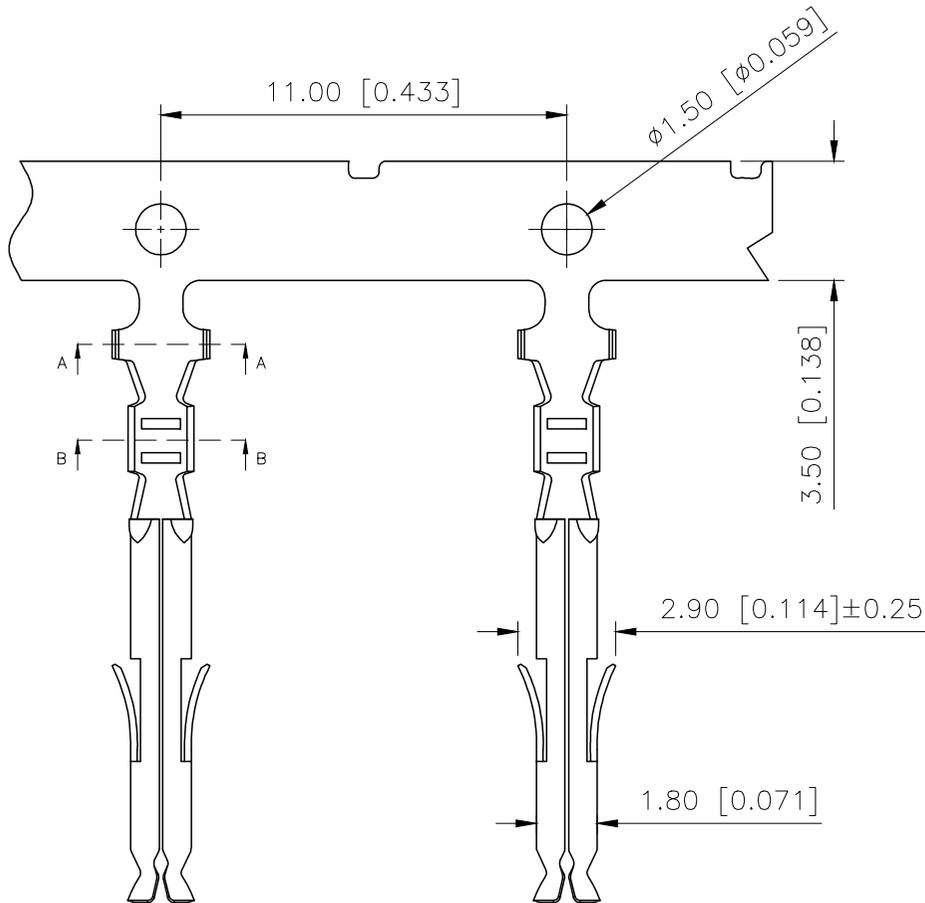


Specifications:
规格:
Voltage rating:600V AC/DC
额定电压: 600V AC/DC
Current rating:5A AC/DC
额定电流: 5A AC/DC
Withstanding voltage:1500V AC/minute
耐受电压: 1500V AC/分钟
Temperature range:−40°C−+125°C
温度范围: −40°C−+125°C
Insulation resistance:1000MΩ min
绝缘电阻: 1000MΩ min
Contact resistance:20mΩ max
接触电阻: 20mΩ max

PART NO.:

X4140 I F-B SN
① ② ③ ④ ⑤

- ①Series Number.
- ②Category: T-terminal
- ③Category:F-Female Terminal
- ④Material:B-Brass
- ⑤Finish:SN-Tin-plated

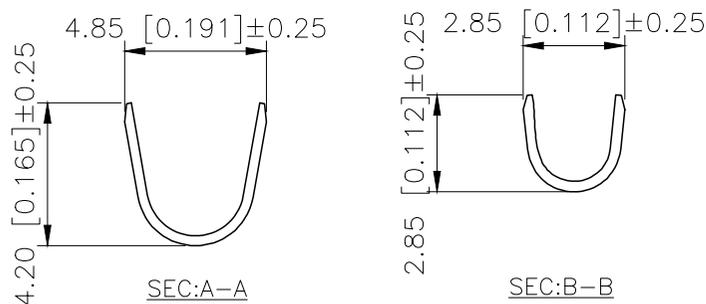

X4140TF-BSN	Brass	Tin-plated	AWG22#-26#	X4140HM
PART NO	Material	Finish	Wire Range	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 4.14mm Crimp Style Connector
CHECKED		UNIT:	mm/in	PART NO.: X4140TF-BSN
APPROVED		SIZE:	A4	DWG NO.: