

EM2939 Series EuroMag Terminal Blocks

Hi-Current, 15.00 Centers

SPECIFICATIONS

Rating: 115A, 600V with No Bottom Cover (NC) Option.

Center Spacing: 0.591" (15.00mm)

Wire Range: #2-20 AWG

Housing Material: UL rated 94V0 Thermoplastic

Contact Material: Tin-Plated Copper

Cage Material: Steel, Chromate-Plated

Screw Size: M5 Stainless Steel

Operating Temperature: 105°C (221°F) max., -40°C (-40°F) min.

Torque Rating: 15 lb-in.

Recommended PCB Hole Diameters: 0.063" (1.60mm)

Construction: Mold to length

Agency Information: cULus File E62622; CE Certified




EM293908

| Poles | L (mm) |
|-------|--------|
| 2 | 30.0 |
| 3 | 45.0 |
| 4 | 60.0 |
| 5 | 75.0 |
| 6 | 90.0 |
| 7 | 105.0 |
| 8 | 120.0 |

To convert to inches, divide by 25.4

Dimensions - mm

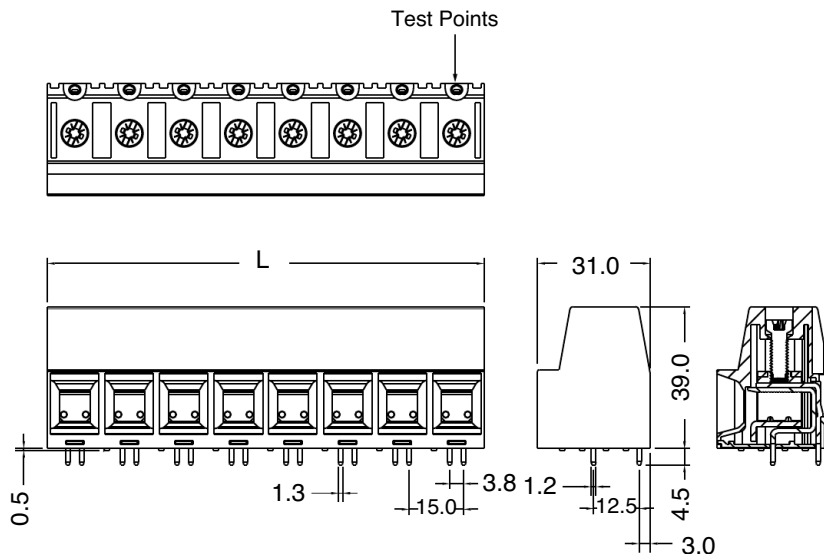

Part Numbering System

Series

EM2939

of Poles

□□

02 to 08