

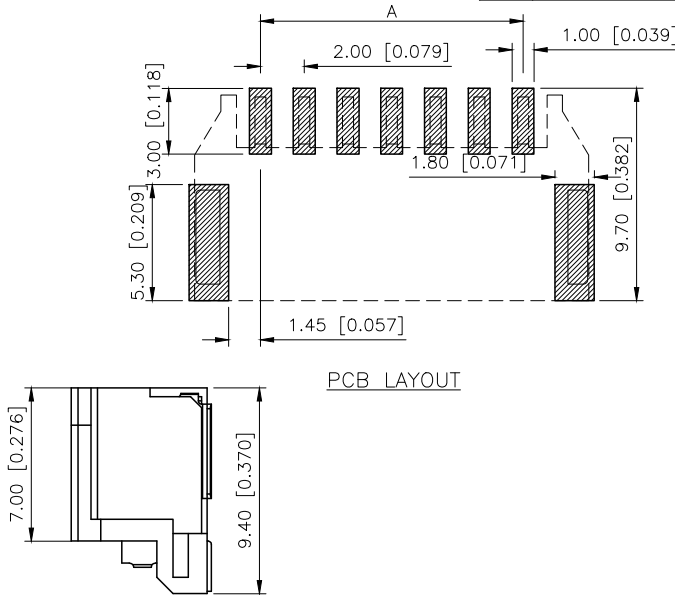


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.11.28	阿树

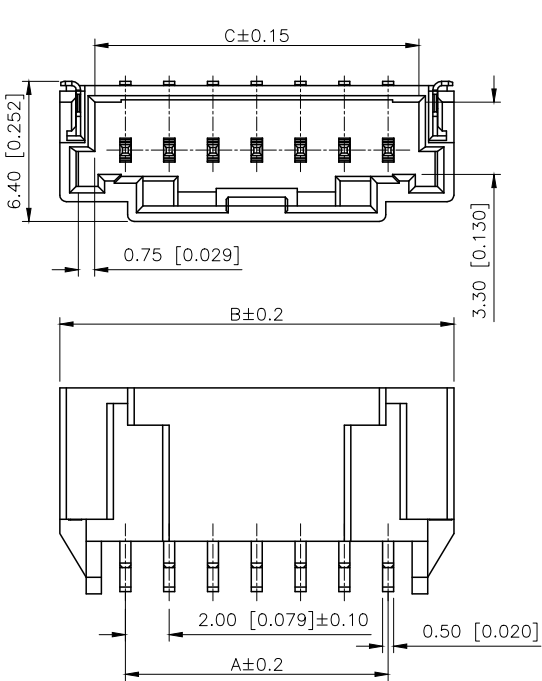

PCB LAYOUT

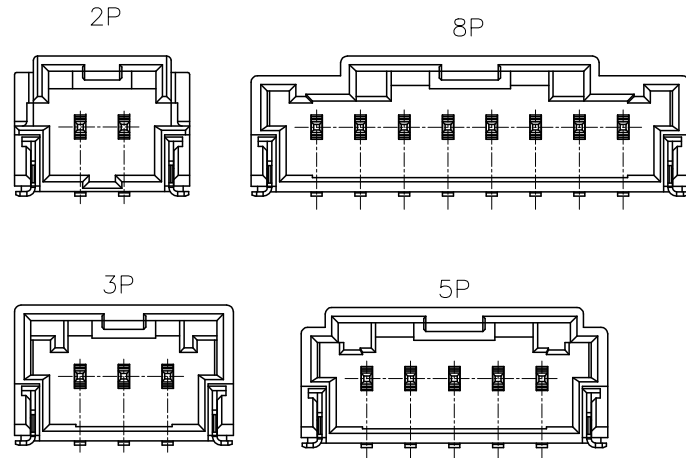

PART NO.:

X2009 W R S-XX-9T SW
① ② ③ ④ ⑤ ⑥ ⑦

Specifications:
规格:
Voltage rating:125V AC/DC
额定电压: 125V AC/DC
Current rating:3A AC/DC
额定电流: 3A AC/DC
Withstanding voltage:500V AC/minute
耐受电压: 500V AC/分钟
Temperature range:-40℃~+125℃
温度范围: -40℃~+125℃
Insulation resistance:≥1000MΩ
绝缘电阻: ≥1000MΩ
Contact resistance:≤10mΩ
接触电阻: ≤10mΩ
After environmental testing:≤20mΩ
环境测试后: ≤20兆欧

- ①Series No
②Category:W-Wafer
③Welding Board Angle:R-Stright 90°
④Welding Way:S-SMT
⑤Row No-Pin No:XX-02~15Pin
⑥Material:9T-PA9T 94V-0
⑦Plating Category:SW-Tin Plating

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
2	2.00	8.00	4.80	9	16.00	22.00	18.80
3	4.00	10.00	6.80	10	18.00	24.00	20.80
4	6.00	12.00	8.80	11	20.00	26.00	22.80
5	8.00	14.00	10.80	12	22.00	28.00	24.80
6	10.00	16.00	12.80	13	24.00	30.00	26.80
7	12.00	18.00	14.80	14	26.00	32.00	28.80
8	14.00	20.00	16.80	15	28.00	34.00	30.80

X2009WRS-XX-9TSW	PA9T UL 94V-0	Brass	Tin-Plated	Brass	Tin-Plated	X2009H
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tabs)	Finish (Solder Tabs)	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:
CHECKED		UNIT: mm/in
APPROVED		SIZE: A4

MODEL TYPE: 2.00mm Crimp Style Connectors
PART NO.: X2009WRS-XX-9TSW
DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1