

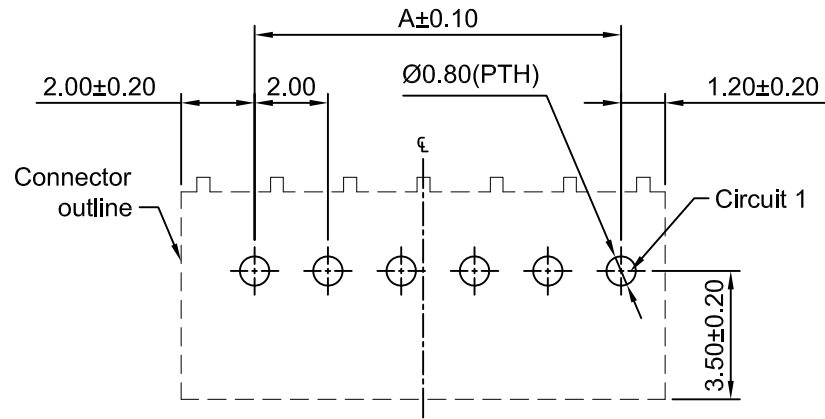
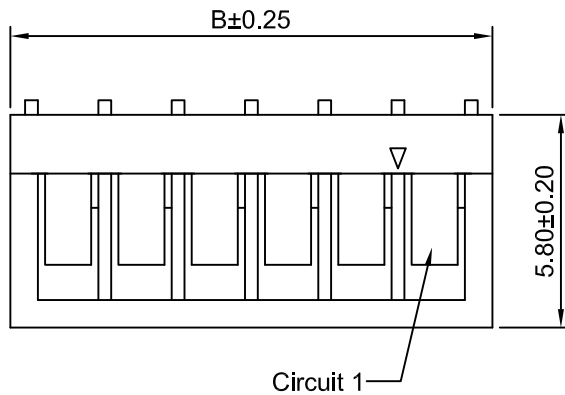


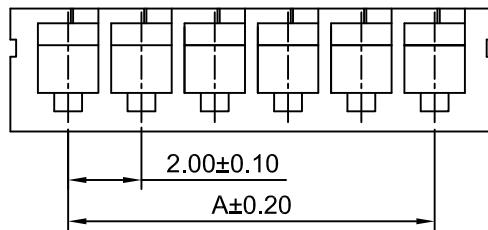

P.C.B LAYOUT
TOLERANCE:±0.05



SPECIFICATIONS:

Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
B2012H-2P	2.00	5.20
B2012H-3P	4.00	7.20
B2012H-4P	6.00	9.20
B2012H-5P	8.00	11.20
B2012H-6P	10.00	13.20
B2012H-7P	12.00	15.20
B2012H-8P	14.00	17.20
B2012H-9P	16.00	19.20
B2012H-10P	18.00	21.20
B2012H-11P	20.00	23.20
B2012H-12P	22.00	25.20
B2012H-13P	24.00	27.20
B2012H-14P	26.00	29.20
B2012H-15P	28.00	31.20
B2012H-16P	30.00	33.20

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		5:1		1 of 1			
DRWN		CHK'D		APPR			
Wenmin Luo		Diankui Wan		Jack Yin		2.00mm PITCH HOUSING	
General Tolerances				THIRD ANGLE PROJECTION			
x.xx±0.25							
x.xx±0.20							
x.xxx±0.15				DRAWING NO.		REV A2	
ANGLES ±1°							
							
				B2012H-XP			