
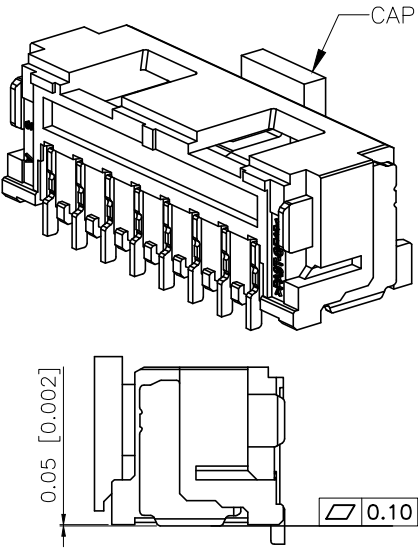


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.12.3	阿树

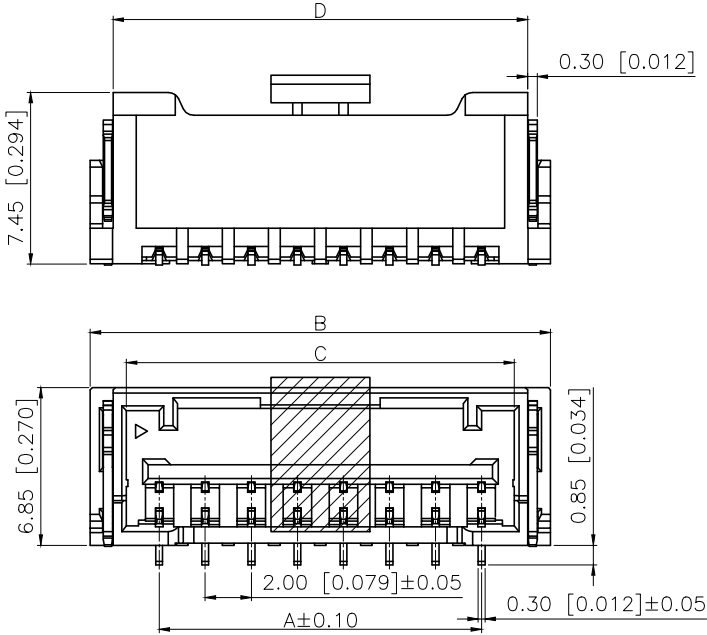


Specifications:
规格:
Voltage rating:250V AC/DC
额定电压: 250V AC/DC
Current rating:3A AC/DC
额定电流: 3A AC/DC
Withstanding voltage:800V AC/minute
耐受电压: 800V AC/分钟
Temperature range:-40℃-+125℃
温度范围: -40℃-+125℃
Insulation resistance:≥1000MΩ
绝缘电阻: ≥1000MΩ
Contact resistance:≤20mΩ
接触电阻: ≤20mΩ
After environmental testing:≤40mΩ
环境测试后: ≤40mΩ
HF-Halogen free
无卤

PART NO.:

X2023 W V S-XX-9T SW
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
②Category:W-Wafer
③Welding Board Angle:V-Stright 180°
④Welding Way:S-SMT
⑤Row No.Pin No.: XX-02P-15P;
⑥Material:9T -PA9T 94V-0
⑦Plating Category: SW-Matte Tin

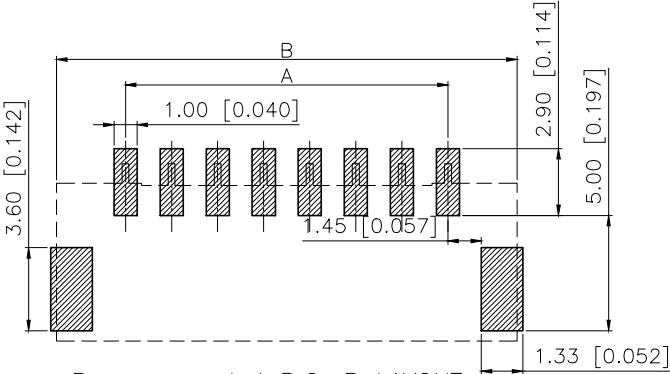

Recom mended P.C. B LAYOUT

Genrd Tolerance±0.05

Poles	Dimension mm				Poles	Dimension mm			
	A	B	C	D		A	B	C	D
2	2.00	8.00	4.85	6.00	09	16.00	22.00	18.85	20.00
3	4.00	10.00	6.85	8.00	10	18.00	24.00	20.85	22.00
4	6.00	12.00	8.85	10.00	11	20.00	26.00	22.85	24.00
5	8.00	14.00	10.85	12.00	12	22.00	28.00	24.85	26.00
6	10.00	16.00	12.85	14.00	13	24.00	30.00	26.85	28.00
7	12.00	18.00	14.85	16.00	14	26.00	32.00	28.85	30.00
8	14.00	20.00	16.85	18.00	15	28.00	34.00	30.85	32.00

X2023WVS-XX-9TSW	PA9T UL 94V-0	Brass	Matte Tin	Phorphos Bronze	Matte Tin	X2023H
PART NO	Material	Finish(Pin)	Finish(Pin)	Material (Solder Tabs)	Finish (Soder Tabs)	Mates With XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuces	



DESIGN	阿树	VIEW:	MODEL TYPE: 2.00mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X2023WVS-XX-9TSW
APPROVED		SIZE: A4	DWG NO.: