


- Features:
- High voltage capability from 1600 to 7000 volts
 - Inexpensive high voltage leaded resistor solution
 - High resistance values up to 1G
 - Tolerances as low as 1%; TCRs as low as 50PPM/°C
 - Flameproof coating (brown) standard;
 - Epoxy coating (blue) available up to 2W
 - RoHS compliant and halogen-free



Electrical Specifications							
Type/Code	Power Rating (Watts) @ 70°C	Maximum Working Voltage	Maximum Overload Voltage	Dielectric Withstanding Voltage		Resistance Temperature Coefficient ⁽¹⁾	Ohmic Range (Ω) and Tolerance
				Silicone	Epoxy		
MG14	0.25W	1600V	2000V	400V	500V	±100 ppm/°C	1K - 1G
MG12	0.5W	3500V	4000V	500V	700V		
MG1	1W	4500V	5000V	500V	1000V		
MG2	2W	7000V	14000V	700V	1200V		
MGM12	0.5W	1700V	2500V	400V	500V		
MGM1	1W	4000V	4500V	500V	700V		
MGM2	2W	5000V	10000V	500V	1000V		
MGM3	3W	7000V	14000V	700V	1200V		


⁽¹⁾ ±50 ppm/°C available for some values and sizes. Contact factory.

Mechanical Specifications					
Type/Code	A Body Length	B Body Diameter	C Lead Length (Bulk)	D Lead Diameter	Unit
MG14	0.248 ± 0.020	0.091 ± 0.012	1.102 ± 0.079	0.022 ± 0.001	inches
	6.30 ± 0.50	2.30 ± 0.30	28.00 ± 2.00	0.55 ± 0.03	mm
MG12	0.354 ± 0.020	0.126 ± 0.020	1.024 ± 0.079	0.026 ± 0.001	inches
	9.00 ± 0.50	3.20 ± 0.50	26.00 ± 2.00	0.65 ± 0.03	mm
MG1	0.453 ± 0.039	0.157 ± 0.020	0.945 ± 0.079	0.031 ± 0.001	inches
	11.50 ± 1.00	4.00 ± 0.50	24.00 ± 2.00	0.78 ± 0.03	mm
MG2	0.610 ± 0.039	0.197 ± 0.020	1.260 ± 0.079	0.031 ± 0.001	inches
	15.50 ± 1.00	5.00 ± 0.50	32.00 ± 2.00	0.78 ± 0.03	mm
MGM12	0.248 ± 0.020	0.091 ± 0.012	1.102 ± 0.079	0.022 ± 0.001	inches
	6.30 ± 0.50	2.30 ± 0.30	28.00 ± 2.00	0.55 ± 0.03	mm
MGM1	0.354 ± 0.020	0.157 ± 0.020	1.024 ± 0.079	0.026 ± 0.001	inches
	9.00 ± 0.50	4.00 ± 0.50	26.00 ± 2.00	0.65 ± 0.03	mm
MGM2	0.453 ± 0.039	0.177 ± 0.020	1.378 ± 0.079	0.031 ± 0.001	inches
	11.50 ± 1.00	4.50 ± 0.50	35.00 ± 2.00	0.78 ± 0.03	mm
MGM3	0.610 ± 0.039	0.197 ± 0.020	1.260 ± 0.079	0.031 ± 0.001	inches
	15.50 ± 1.00	5.00 ± 0.50	32.00 ± 2.00	0.78 ± 0.03	mm

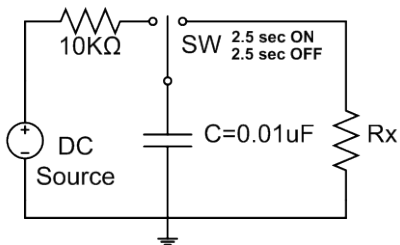
Performance Characteristics		
Test	Test Specification	Test Condition
Temperature Coefficient (TCR)	by type (see Electrical Specification Chart)	Resistance value at room temperature
Short Time Overload	$\pm(1\%+0.05\Omega)$	Rated Voltage x 2.5 or Max. Overload Voltage, whichever is lower, for 5 seconds
Moisture Resistance	$\pm(5\%+0.05\Omega)$	40°C±2°C, 90%~95% R.H., 1000 hours (for epoxy resin) 90 minutes ON and 30 minutes OFF
Load Life	$\pm(3\%+0.05\Omega)$	1000 hours at rated voltage, 70 °C 90 minutes ON and 30 minutes OFF
Insulation Resistance	$\pm 10,000M\Omega$ over	500 ± 50V DC during 1 minute, V-Block method
Dielectric Withstanding Voltage	by type (see Electrical Specification Chart)	In V-Block for 60 seconds
Resistance to Soldering Heat	$\pm(1\%+0.05\Omega)$	260°C±5°C, 2 seconds ± 1 second
Resistance to Solvent	No abnormality in coatings and markings	IPA for 5±0.5 minutes with ultrasonic
Terminal Strength	Tensile: $\geq 2.5Kg$	Direct load for 10 seconds, in the direction of the terminal leads
Anti-surge Characteristics	$\pm(10\%+0.05\Omega)$	Discharge Test: 0.01uf capacitor discharge pulse 10 times (1 pulse/5 seconds max.) 
Intermittent Overload	$\pm(1\%+0.05\Omega)$	4 times RCWV for 10,000 cycles (1 second ON, 25 seconds OFF)

RCWV (Rated Continuous Working Voltage) = $\sqrt{\text{Power Rating} \times \text{Resistance Value}}$
Operating Temperature Range: -55°C to +175°C


Power Derating Curve:

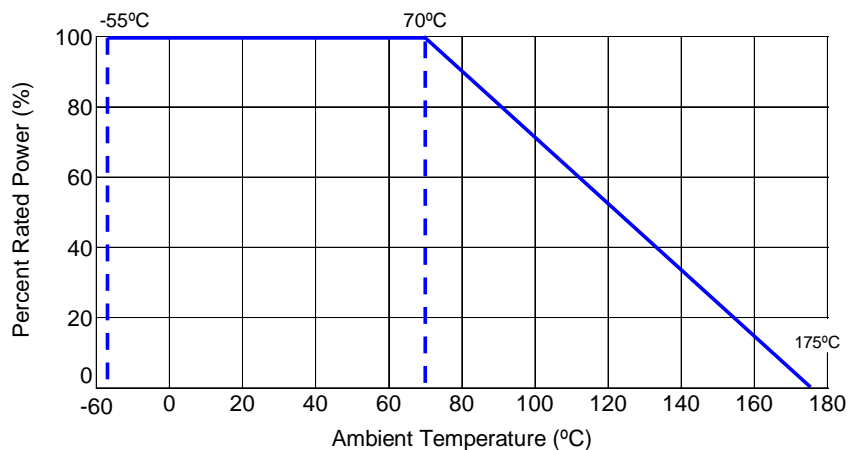

Hot Spot Temperature:

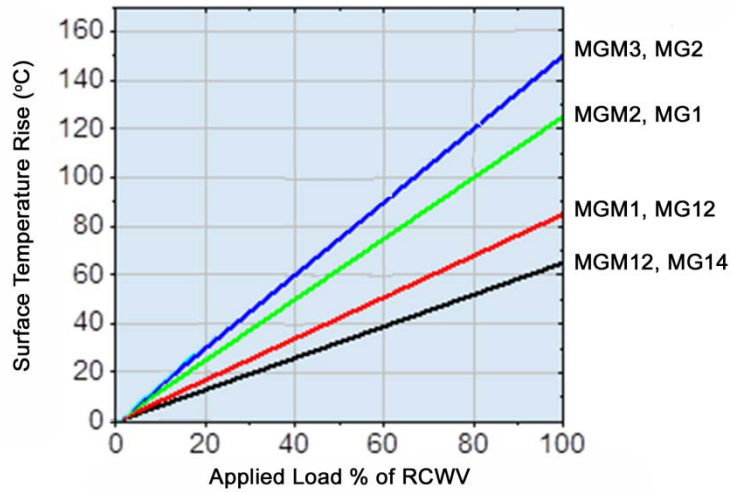


Packaging Specifications

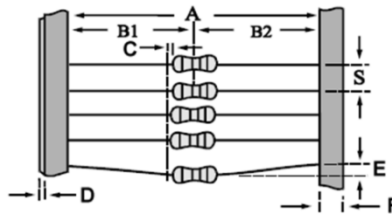

Type/Code	A	B1/B2	C	D	E	F	S	Unit
MG14	2.047 + 0.039 /-0.00	0.047	0.031 max.	0.020 max.	0.047 max.	0.236 ± 0.020	0.197	inches
	52.00 + 1.00 /-0.00	1.20	0.80 max.	0.50 max.	1.20 max.	6.00 ± 0.50	5.00	mm
MG12	2.047 + 0.039 /-0.00	0.047	0.031 max.	0.020 max.	0.047 max.	0.236 ± 0.020	0.197	inches
	52.00 + 1.00 /-0.00	1.20	0.80 max.	0.50 max.	1.20 max.	6.00 ± 0.50	5.00	mm
MG1	2.874 + 0.039 /-0.00	0.059	0.031 max.	0.020 max.	0.047 max.	0.236 ± 0.020	0.197	inches
	73.00 + 1.00 /-0.00	1.50	0.80 max.	0.50 max.	1.20 max.	6.00 ± 0.50	5.00	mm
MG2	2.874 + 0.039 /-0.00	0.059	0.031 max.	0.020 max.	0.047 max.	0.236 ± 0.020	0.394	inches
	73.00 + 1.00 /-0.00	1.50	0.80 max.	0.50 max.	1.20 max.	6.00 ± 0.50	10.00	mm
MGM12	2.047 + 0.039 /-0.00	0.047	0.031 max.	0.020 max.	0.047 max.	0.236 ± 0.020	0.197	inches
	52.00 + 1.00 /-0.00	1.20	0.80 max.	0.50 max.	1.20 max.	6.00 ± 0.50	5.00	mm
MGM1	2.047 + 0.039 /-0.00	0.047	0.031 max.	0.020 max.	0.047 max.	0.236 ± 0.020	0.197	inches
	52.00 + 1.00 /-0.00	1.20	0.80 max.	0.50 max.	1.20 max.	6.00 ± 0.50	5.00	mm
MGM2	2.874 + 0.039 /-0.00	0.059	0.031 max.	0.020 max.	0.047 max.	0.236 ± 0.020	0.197	inches
	73.00 + 1.00 /-0.00	1.50	0.80 max.	0.50 max.	1.20 max.	6.00 ± 0.50	5.00	mm
MGM3	2.874 + 0.039 /-0.00	0.059	0.031 max.	0.020 max.	0.047 max.	0.236 ± 0.020	0.394	inches
	73.00 + 1.00 /-0.00	1.50	0.80 max.	0.50 max.	1.20 max.	6.00 ± 0.50	10.00	mm

Max. deviation of spacing: 1mm per 10 spacing.

Tape on Reel/Tape on Box Specifications

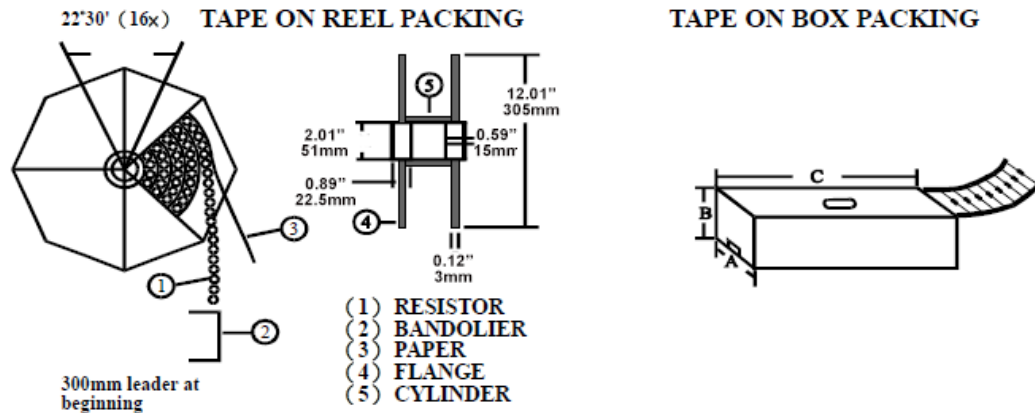

Type/Code	Quantity per Reel	Quantity per Box	Tape on Reel		Tape on Box		Unit
			Across Flange (A)	W (A)	H (B)	L (C)	
MG14	5000	5000	2.835	3.150	2.953	10.394	inches
			72.00	80.00	75.00	264.00	mm
MG12	3000	1000	2.835	3.150	1.811	10.394	inches
			72.00	80.00	46.00	264.00	mm
MG1	2000	1000	2.835	3.150	2.953	10.394	inches
			72.00	80.00	75.00	264.00	mm
MG2	1000	1000	3.740	4.055	3.780	10.433	inches
			95.00	103.00	96.00	265.00	mm
MGM12	5000	5000	2.835	3.150	4.134	10.394	inches
			72.00	80.00	105.00	264.00	mm
MGM1	3000	1000	2.835	3.150	1.811	10.394	inches
			72.00	80.00	46.00	264.00	mm
MGM2	2000	1000	3.740	4.055	3.228	10.433	inches
			95.00	103.00	82.00	265.00	mm
MGM3	1000	1000	3.740	4.055	3.780	10.433	inches
			95.00	103.00	96.00	265.00	mm

RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union's directive regarding "Restrictions on Hazardous Substances" (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

RoHS Compliance Status

Standard Product Series	Description	Package / Termination Type	Standard Series RoHS Compliant	Lead-Free Termination Composition	Lead-Free Mfg. Effective Date (Std Product Series)	Lead-Free Effective Date Code (YY/WW)
MG	High Voltage Metal Glaze Leaded Resistor	Axial	YES(1)	100% Matte Sn	Jan-06	06/01
MGM	High Voltage Mini Metal Glaze Leaded Resistor	Axial	YES(1)	100% Matte Sn	Jan-06	06/01

Note (1): RoHS Compliant by means of exemption 7c-l.

“Conflict Metals” Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the “conflict region” of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

Compliance to “REACH”

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, “The Registration, Evaluation, Authorization and Restriction of Chemicals”, otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

Environmental Policy

It is the policy of Stackpole Electronics, Inc. (SEI) to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

How to Order

	1	2	3	4	5	6	7	8	9	10
	M	G	1	2	J	T	1	0	0	K

Product Series	Size	Power Rating	Tolerance			Packaging				Resistance Value		
MG	Standard Size	14	0.25W	Code	Tol	Value	Code	Description	Size		Quantity	Four characters with the multiplier used as the decimal holder. 1 Kohm = 1K00 1 Mohm = 1M00 1 Gohm = 1G00
	Silicone Coating	12							MG14, MGM12			
MGM	Mini Size	1	1W	F	1%	E24	T	Tape and Reel	MG12, MGM1		3,000	
	Silicone Coating	2		J	5%				MG1, MGM2		2,000	
MGE	Standard Size	3	3W	K	10%	A	Ammo	MG2, MGM3		1,000		
	Epoxy Coating	1		MG14, MGM12				5,000				
MGME	Mini Size					B	Bulk	MG12, MG1, MG2		1,000		
	Epoxy Coating							MGM1, MGM2, MGM3		1,000		
								all sizes		1,000		