


# 233-100-H5 Solder mount hermetic receptacle MIL-DTL-38999 Series III type

How To Order Commercial								
Sample Part Number	233-100			-H5	Z1	11-35	P	N
Series / Basic Part No.	Series 23 SuperNine® Hermetic Receptacle							
Connector Style	H5 = Solder Mount							
Finish	Z1 = CRES, Passivated ZL = CRES, Nickel Finish							
Shell Size - Insert Arrangement*	Per MIL-STD-1560							
Contact Type	P = Pin, Solder Cup		S = Socket, Solder Cup					
	X = Pin, Eyelet		Z = Socket, Eyelet					
	C = Pin, PCB		D = Socket, PCB					
Alternate Key Position*	A, B, C, D, E, N = Normal							

**\*Refer to Section A for complete details**  
Modification codes may be added directly to the end of any valid part number

D

Dimensions									
Shell Size Code	Shell Size	A Thread	Ø B Max	Ø C Max	Ø D ±.005(0.1)	E Max	F Max	HP Max	HS Max
A	9/09	.6250-1P-.3L-TS-2A	.673(17.1)	.764(19.4)	.680(17.3)	.201(5.1)	.937(23.8)	.677(17.2)	.764(19.4)
B	11	.7500-1P-.3L-TS-2A	.783(19.9)	.858(21.8)	.789(20.0)	.201(5.1)	.937(23.8)	.677(17.2)	.764(19.4)
C	13	.8750-1P-.3L-TS-2A	.909(23.1)	.980(24.9)	.914(23.2)	.201(5.1)	.937(23.8)	.677(17.2)	.764(19.4)
D	15	1.0000-1P-.3L-TS-2A	1.031(26.2)	1.106(28.1)	1.038(26.4)	.201(5.1)	.937(23.8)	.677(17.2)	.764(19.4)
E	17	1.1875-1P-.3L-TS-2A	1.157(29.4)	1.232(31.3)	1.164(29.6)	.201(5.1)	.937(23.8)	.677(17.2)	.764(19.4)
F	19	1.2500-1P-.3L-TS-2A	1.252(31.8)	1.323(33.6)	1.258(32.0)	.201(5.1)	.937(23.8)	.677(17.2)	.764(19.4)
G	21	1.3750-1P-.3L-TS-2A	1.378(35.0)	1.449(36.8)	1.383(35.1)	.201(5.1)	.937(23.8)	.677(17.2)	.764(19.4)
H	23	1.5000-1P-.3L-TS-2A	1.504(38.2)	1.575(40.0)	1.508(38.3)	.232(5.9)	.969(24.6)	.677(17.2)	.764(19.4)
J	25	1.6250-1P-.3L-TS-2A	1.626(41.3)	1.701(43.2)	1.643(41.7)	.232(5.9)	.969(24.6)	.677(17.2)	.764(19.4)

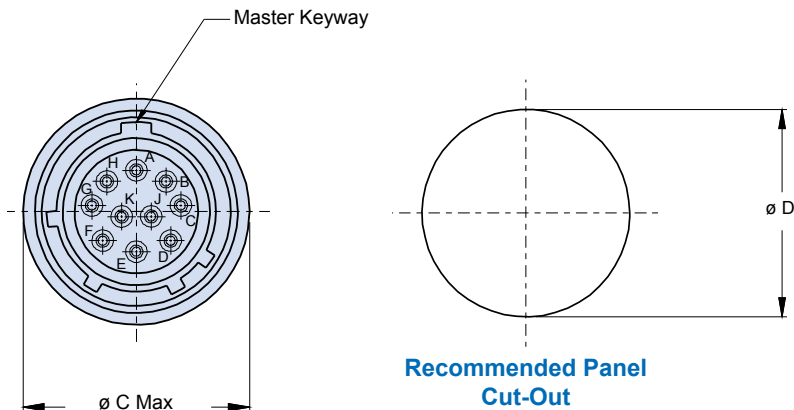

Wire Accomodation	
Contact Size	Wire Gauge
22D	#22 - #28
20	#20 - #24
16	#16 - #20
12	#12 - #14

Hermetic Leak Rate Mod Codes	
Designator	Required Leak Rate
-585A	1 x 10 <sup>-10</sup> cc Helium per second
-585B	1 x 10 <sup>-9</sup> cc Helium per second
-585C	1 x 10 <sup>-8</sup> cc Helium per second

# SuperNine® Hermetic connectors


## D38999/25 Solder mount hermetic receptacle

### MIL-DTL-38999 Series III QPL



How To Order MS						
Sample Part Number	D38999	/25	Y	B-35	P	N
Series / Basic Part No.	MIL-DTL-D38999 Series III Type					
Connector Style	/25 = Solder Mount					
Finish*	Y = CRES, Passivated N = CRES, Nickel Finish					
Shell Size - Insert Arrangement*	Per MIL-STD-1560					
Contact Type	P = Pin, Solder Cup X = Pin, Eyelet C = Pin, PCB Flex Feedthru		S = Socket, Solder Cup Z = Socket, Eyelet D = Socket, PCB Flex Feedthru			
Alternate Key Position*	A, B, C, D, E, N = Normal					

\*Refer to Section A for complete details  
Modification codes may be added directly to the end of any valid part number

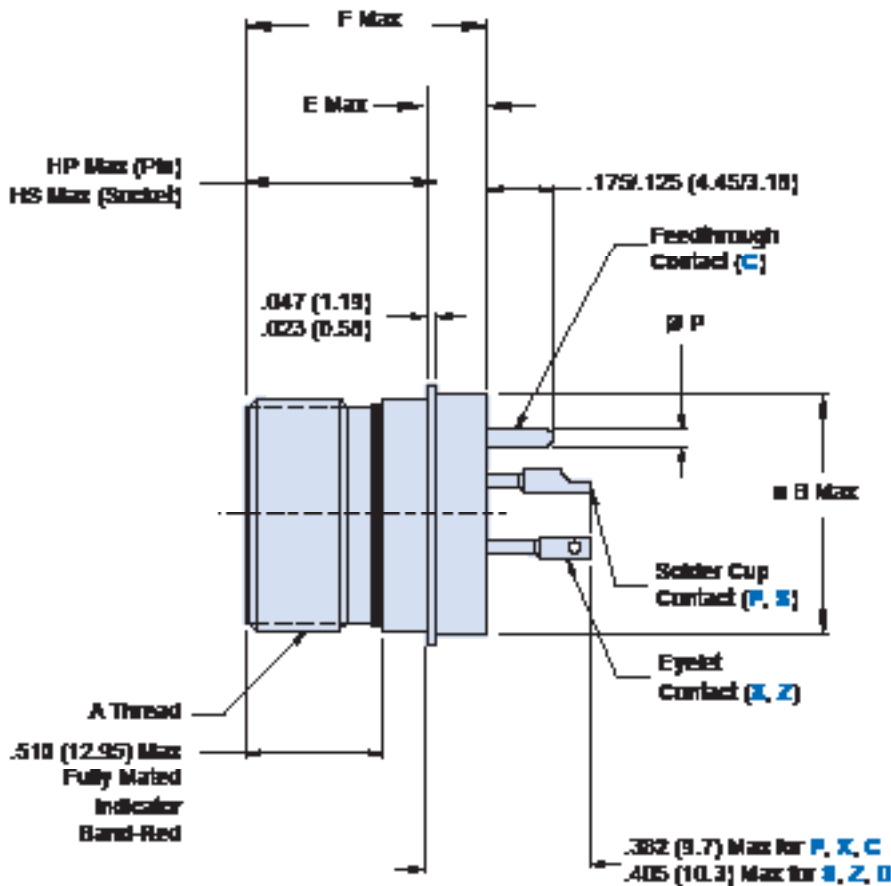

Contact Size & Diameter	
PRINTED CIRCUIT TAIL CONFIGURATIONS CONTACT STYLE C AND D	
SIZE 12 AND SIZE 16	
.050 ± .015 (1.27 ± 0.38)	
SIZE 22D AND SIZE 20	
Contact Size	Ø P
22D	.011 (0.28) .015 (0.38)
20	.024 (0.61) .028 (0.71)
16	.0635 (1.61) .0615 (1.56)
12	.095 (2.41) .093 (2.36)

Mates With	
Plug Part Number	Description
233-105SG6	SuperNine® plug with single integrated band porch
233-105BG6	SuperNine® plug with integrated band porch and boot groove
233-105DG6	SuperNine® plug with double integrated band porch
233-105-G6	SuperNine® plug with accessory attachment threads

D

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Glenair:

[D38999/25NA98PA](#) [D38999/25NA98PB](#) [D38999/25NA98PC](#) [D38999/25NA98PD](#) [D38999/25NA98PN](#)  
[D38999/25NB35PA](#) [D38999/25NB35PN](#) [D38999/25NB5PN](#) [D38999/25NB98PN](#) [D38999/25NB99PN](#)  
[D38999/25NC35CA](#) [D38999/25NC35PN](#) [D38999/25NC4PN](#) [D38999/25NC98PN](#) [D38999/25ND19PN](#)  
[D38999/25ND35PN](#) [D38999/25NE26PN](#) [D38999/25NF11PN](#) [D38999/25YA35PA](#) [D38999/25YA35PB](#)  
[D38999/25YA35PN](#) [D38999/25YA98PB](#) [D38999/25YA98PN](#) [D38999/25YA98XA](#) [D38999/25YA98XN](#)  
[D38999/25YB35CN](#) [D38999/25YB5PN](#) [D38999/25YB98PN](#) [D38999/25YB99PN](#) [D38999/25YC35PA](#)  
[D38999/25YC35PN](#) [D38999/25YC8PN](#) [D38999/25YC98PN](#) [D38999/25YD15PN](#) [D38999/25YG41PN](#)  
[D38999/25YJ35PN](#) [D38999/25NA35DA](#) [D38999/25NA35DB](#) [D38999/25NA35DC](#) [D38999/25NA35DE](#)  
[D38999/25NA35DN](#) [D38999/25NA35SA](#) [D38999/25NA35SB](#) [D38999/25NA35SC](#) [D38999/25NA35SD](#)  
[D38999/25NA35SE](#) [D38999/25NA35SN](#) [D38999/25NA35ZA](#) [D38999/25NA35ZB](#) [D38999/25NA35ZC](#)  
[D38999/25NA35ZD](#) [D38999/25NA35ZE](#) [D38999/25NA35ZN](#) [D38999/25NA98DA](#) [D38999/25NA98DB](#)  
[D38999/25NA98DC](#) [D38999/25NA98DD](#) [D38999/25NA98DE](#) [D38999/25NA98DN](#) [D38999/25NA98SA](#)  
[D38999/25NA98SB](#) [D38999/25NA98SC](#) [D38999/25NA98SD](#) [D38999/25NA98SE](#) [D38999/25NA98SN](#)  
[D38999/25NA98ZA](#) [D38999/25NA98ZB](#) [D38999/25NA98ZC](#) [D38999/25NA98ZD](#) [D38999/25NA98ZE](#)  
[D38999/25NA98ZN](#) [D38999/25NB35DB](#) [D38999/25NB35DC](#) [D38999/25NB35DD](#) [D38999/25NB35DE](#)  
[D38999/25NB35DN](#) [D38999/25NB35SA](#) [D38999/25NB35SB](#) [D38999/25NB35SC](#) [D38999/25NB35SD](#)  
[D38999/25NB35SE](#) [D38999/25NB35SN](#) [D38999/25NB35ZA](#) [D38999/25NB35ZB](#) [D38999/25NB35ZC](#)  
[D38999/25NB35ZD](#) [D38999/25NB35ZE](#) [D38999/25NB35ZN](#) [D38999/25NB4DA](#) [D38999/25NB4DB](#)  
[D38999/25NB4DC](#) [D38999/25NB4DD](#) [D38999/25NB4DE](#) [D38999/25NB4DN](#) [D38999/25NB4SA](#) [D38999/25NB4SB](#)  
[D38999/25NB4SC](#) [D38999/25NB4SD](#) [D38999/25NB4SE](#) [D38999/25NB4SN](#)