

RS9116 Connectivity Product Family

n-Link™ and WiSeConnect™



Product Brief

Silicon Labs' RS9116 family of SoCs and modules provides a comprehensive multi-protocol wireless connectivity solution including 802.11 a/b/g/n (2.4 GHz and 5 GHz) and dual-mode Bluetooth® 5.

Solution Highlights

- Co-existence of multiple wireless protocols managed by an internal protocol arbitration manager
- Ultra-low power consumption with multiple power modes to reduce the system energy consumption
- Multiple levels of security including WPA/WPA2 Personal, WPA2 Enterprise, SSL/TLS, to create a highly secure system
- Fully integrated and wireless certified modules with multiple sizes as small as 4.63 mm x 7.90 mm
- Multiple software architectures (hosted and embedded) and host interfaces (SDIO, USB, SPI, UART) for easy integration with different processor families and operating systems, including Linux and MCUs
- Leading edge RF performance providing long range and higher throughputs

Features

Wi-Fi®

- Compliant to single-spatial stream IEEE 802.11 a/b/g/n with single band (2.4 GHz), and dual band (2.4 and 5 GHz) support
- Support for 20 MHz channel bandwidth
- Transmit power up to +20 dBm with integrated PA
- Receive sensitivity as low as -97 dBm

Bluetooth

- Compliant to dual-mode Bluetooth 5
- <8 mA transmit current in Bluetooth 5 mode, 2 Mbps data rate
- Data rates: 125 Kbps, 500 Kbps, 1 Mbps, 2 Mbps, 3 Mbps
- Operating Frequency Range:- 2.402 GHz - 2.480 GHz
- Bluetooth 2.1 + EDR, Bluetooth Low Energy 4.0 / 4.1 / 4.2 / 5.0
- Bluetooth Low Energy 1 Mbps, 2 Mbps and Long Range modes
- Bluetooth Low Energy Secure connections
- Bluetooth Low Energy supports central role and peripheral role concurrently
- Bluetooth auto rate and auto TX power adaptation

RF Features

- Integrated baseband processor with calibration memory, RF transceiver, high-power amplifier, balun and T/R switch
- Integrated Antenna and u.FL connector
- Diversity is supported

Software Operating Modes

- Hosted mode (n-Link™): Wi-Fi stack, Bluetooth stack and profiles and all network stacks reside on the host processor
- Embedded mode (WiSeConnect™): Wi-Fi stack, TCP/IP stack, IP modules, Bluetooth stack and some profiles reside in RS9116; Some of the Bluetooth profiles reside in the host processor

Hosted Mode (n-Link™)

- Available host interfaces: SDIO 2.0 and USB HS
- Application data throughput up to 50 Mbps (Hosted Mode) in 802.11n with 20 MHz bandwidth
- Host drivers for Linux
- Support for Client mode, Access point mode (Upto 16 clients), Concurrent Client and Access Point mode, and Enterprise Security
- Support for concurrent Wi-Fi, dual-mode Bluetooth 5

Embedded Mode (WiSeConnect™)

- Available host interface: UART, SPI, SDIO*, and USB CDC
- TCP throughput > 20 Mbps over SDIO host interface with 20 MHz bandwidth
- Support for Embedded Client mode, Access Point mode (Up to 8 clients), Concurrent Client and Access Point mode, and Enterprise Security
- Supports advanced security features: WPA/WPA2-Personal and Enterprise
- Integrated TCP/IP stack, HTTP/HTTPS, SSL/TLS, MQTT
- Bluetooth profile support for GAP, SDP, SPP, GATT, L2CAP and RFCOMM
- Wireless firmware update and provisioning
- Support for concurrent Wi-Fi, dual-mode Bluetooth 5

Security

- Accelerators: AES128/256 in Embedded Mode
- WPA/WPA2-Personal, WPA/WPA2 Enterprise for Client

Power Consumption (2.4 GHz SoC/Module)

- Wi-Fi Standby Associated mode current: 50 uA @ 1 second beacon listen interval
- Wi-Fi 1 Mbps Listen current: 14 mA
- Wi-Fi LP chain Rx current: 19 mA
- Deep sleep current <1 uA, Standby current (RAM retention) < 10 uA

Software and Regulatory Certifications

- Wi-Fi Alliance*
- Bluetooth Qualification*
- Regulatory certifications (FCC, IC, ETSI/CE, TELEC)*

Operating Conditions

- Single supply: 2.1 to 3.6 V or 1.85 V
- Operating temperature: -40 °C to +85 °C (Industrial Grade)

Packages

- Module packages with and without antenna
- SoC packages: QFN

Evaluation Kit:

- Single band EVK with QMS SoC: RS9116X-SB-EVK1
- Single band EVK with B00 SiP Module: RS9116X-SB-EVK2
- Dual band EVK with CC1 Module: RS9116X-DB-EVK1

* Contact Silicon Labs for details.

Package Options

Module Packages

Package Code	Package Type, Pins	Dimensions (mm)	Frequency Band	Integrated Antenna
CC0	LGA, 173	9.1 x 9.8 x 1.6	Dual Band (2.4 / 5 GHz)	No
CC1	LGA, 155	15.0 x 15.70 x 2.2	Dual Band (2.4 / 5 GHz)	Antenna and u.FL Connector
B00	LGA, 126	4.63 x 7.90 x 0.9	Single Band (2.4 GHz)	No

SoC Packages


Package Code	Type of Package, Pins	Dimensions, Pitch (mm)	Frequency Band
QMS	QFN, 84	7 x 7 x 0.85, 0.5	Single Band (2.4 GHz)

Part Ordering Options

Part Number	Wireless	SoC Packages (ppg)	Module Packages (ppg)
Hosted Connectivity (n-Link™)			
RS9116N-SB00-ppg-abc	SBW+Bluetooth 5	QMS	B00
RS9116N-DB00-ppg-abc	DBW+Bluetooth 5	None	CC0, CC1
Embedded Connectivity (WiSeConnect™)			
RS9116W-SB00-ppg-abc	SBW+Bluetooth 5	QMS	B00
RS9116W-DB00-ppg-abc	DBW+Bluetooth 5	None	CC0, CC1

Note: Replace 'ppg' with desired SoC/Module Packages code
 'abc': 'a' represents Silicon version, and 'bc' represents Firmware version
SBW: Single Band Wi-Fi (2.4 GHz); **DBW:** Dual Band Wi-Fi (2.4/5 GHz)

Block Diagram

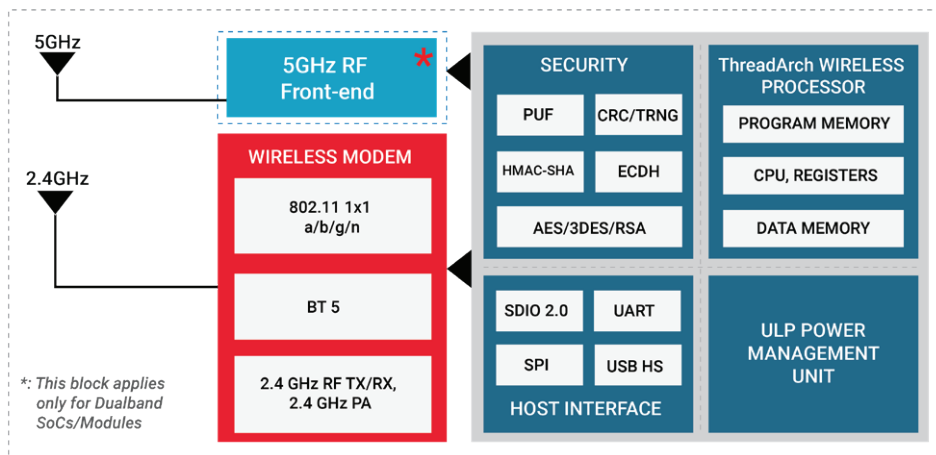

Note: All the performance and power numbers are measured under ideal conditions. There may be variation in numbers based on the actual condition as well as across different modules and SoCs.

Sales: sales@silabs.com | Community Forum: silabs.com/community
 Silicon Laboratories Inc. | 400 W. Cesar Chavez, Austin, TX 78701, Unites States of America | Phone: +1 (512) 416-8500 | silabs.com

© 2020 Silicon Laboratories, Inc. This information supplied by Silicon Laboratories, Inc. is believed to be accurate and reliable, but in no event shall Silicon Laboratories, Inc. be liable for any damages whatsoever arising out of the use or inability to use the information or any errors that may appear in this kit. The Information is provided as is without any warranties of any kind, either express or implied. Silicon Laboratories, Inc. reserves the right, without notice, to make changes to the information or to the design and specifications of its hardware and/or software products. WiSeMCU, SmartMCU are trademarks of Silicon Laboratories, Inc. Silicon Labs, Silicon Laboratories, the "S" symbol, the Silicon Laboratories logo and the Silicon Labs logo are trademarks of Silicon Laboratories Inc. All other product names noted herein may be trademarks of their respective holders.

