

MIRELLA-50-S-PIN

~15° spot beam

SPECIFICATION:

Dimensions	Ø 49.9 mm
Height	23.9 mm
Fastening	pin
ROHS compliant	yes ⓘ




MATERIALS:

Component	Type	Material	Colour	Finish	Coating
MIRELLA-50-S-PIN	Reflector	PC	metal		lacquer

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C12480_MIRELLA-50-S-PIN » Box size: 480 x 280 x 300 mm	336	112	28	3.0

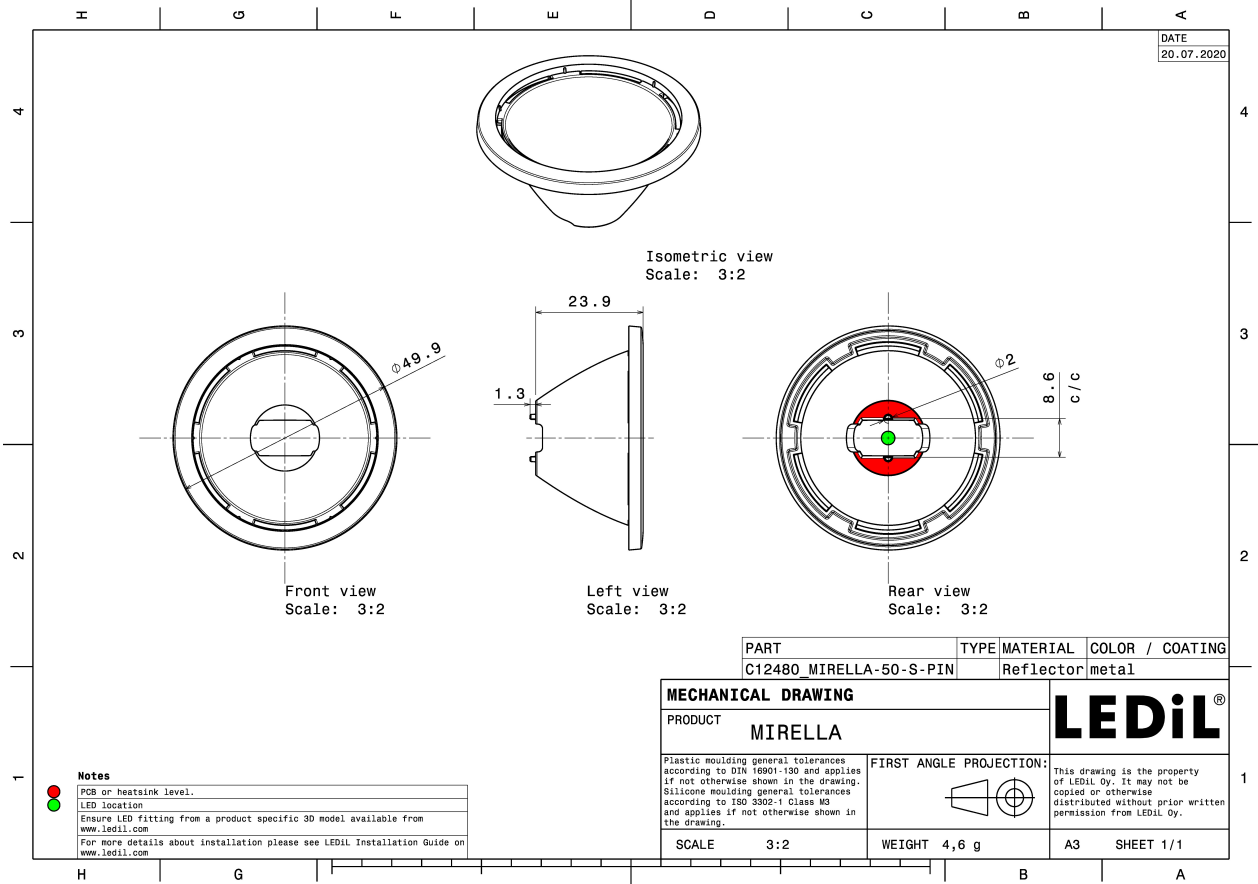

See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):



LED SM4
FWHM / FWTM 15.0° / 32.0°
Efficiency 81 %
Peak intensity 6.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
 C12479_MIRELLA-DL




Light distribution files



LED MHB-A/B
FWHM / FWTM 14.0° / 28.0°
Efficiency 90 %
Peak intensity 9.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



LED MHB-A/B
FWHM / FWTM 17.0° / 38.0°
Efficiency 85 %
Peak intensity 5.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
 C12479_MIRELLA-DL

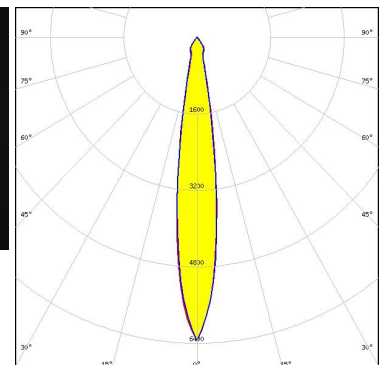


Light distribution files

OPTICAL RESULTS (MEASURED):




LED MHB-A/B
FWHM / FWTM 16.0° / 32.0°
Efficiency 85 %
Peak intensity 7 cd/m
LEDs/each optic 1
Light colour/type White
Required components:
 C13333_MIRELLA-CL

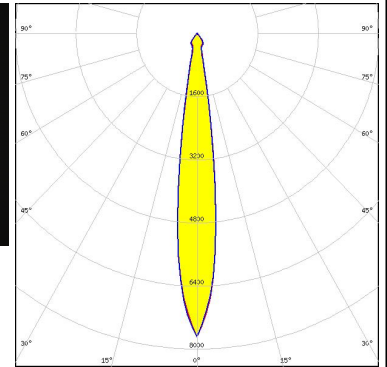

Light distribution files





LED XHP50
FWHM / FWTM 16.0° / 35.0°
Efficiency 89 %
Peak intensity 5.3 cd/m
LEDs/each optic 1
Light colour/type White
Required components:
 C12479_MIRELLA-DL

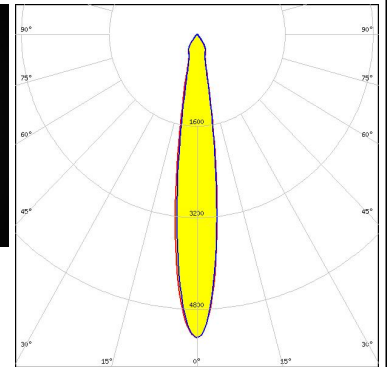

Light distribution files



LED XHP50
FWHM / FWTM 22.0° / 60.0°
Efficiency 86 %
Peak intensity 2.8 cd/m
LEDs/each optic 1
Light colour/type White
Required components:
 C13723_MIRELLA-RZL

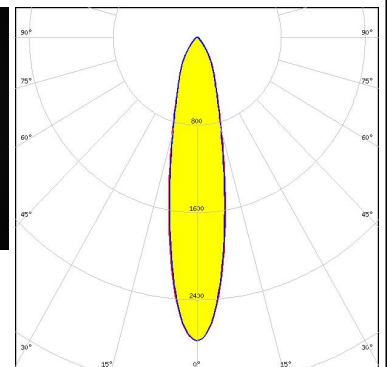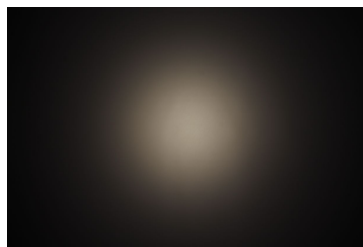


Light distribution files

OPTICAL RESULTS (MEASURED):




LED XHP50
FWHM / FWTM 14.0° / 27.0°
Efficiency 88 %
Peak intensity 7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
C13333_MIRELLA-CL

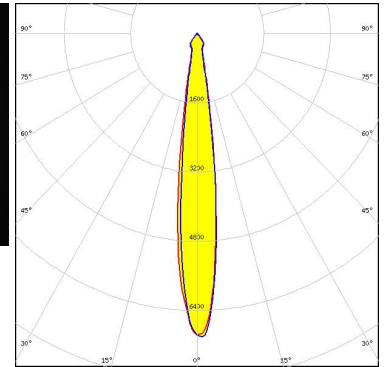

Light distribution files




LED XHP50
FWHM / FWTM 13.0° / 24.0°
Efficiency 93 %
Peak intensity 8.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

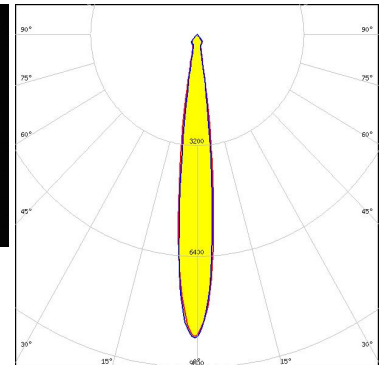

Light distribution files



LED XM-L
FWHM / FWTM 8.7° / 18.0°
Efficiency 90 %
Peak intensity 19.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

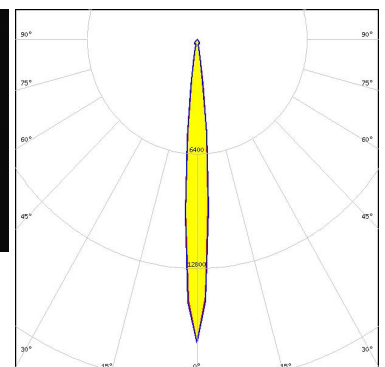

Light distribution files

OPTICAL RESULTS (MEASURED):



LED XM-L
FWHM / FWTM 12.0° / 24.0°
Efficiency 85 %
Peak intensity 11.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
C13333_MIRELLA-CL



Light distribution files




LED XM-L
FWHM / FWTM 12.0° / 26.0°
Efficiency 86 %
Peak intensity 8.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
C12479_MIRELLA-DL



Light distribution files



LED XM-L RGBW (XMLCTW)
FWHM / FWTM 21.0° / 58.0°
Efficiency 84 %
Peak intensity 3.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
C13723_MIRELLA-RZL

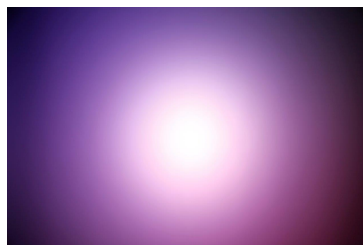

Light distribution files

OPTICAL RESULTS (MEASURED):



LED XM-L2
FWHM / FWTM 8.6° / 18.0°
Efficiency 91 %
Peak intensity 18.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



[Light distribution files](#)



LED XM-L2
FWHM / FWTM 12.0° / 26.0°
Efficiency 86 %
Peak intensity 8.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
C12479_MIRELLA-DL



[Light distribution files](#)



LED XP-G
FWHM / FWTM 8.1° / 16.0°
Efficiency 91 %
Peak intensity 25 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



[Light distribution files](#)

OPTICAL RESULTS (MEASURED):



LED XP-G
FWHM / FWTM 11.0° / 22.0°
Efficiency 86 %
Peak intensity 14.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
C13333_MIRELLA-CL



[Light distribution files](#)



LED XP-G
FWHM / FWTM 11.0° / 24.0°
Efficiency 86 %
Peak intensity 10.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
C12479_MIRELLA-DL



[Light distribution files](#)



LED XP-G2
FWHM / FWTM 7.9° / 16.0°
Efficiency 91 %
Peak intensity 25.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



[Light distribution files](#)

OPTICAL RESULTS (MEASURED):





LED XP-G2
 FWHM / FWTM 11.0° / 24.0°
 Efficiency 87 %
 Peak intensity 10.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 C12479_MIRELLA-DL



Light distribution files



LED XP-L HI
 FWHM / FWTM 7.7° / 16.0°
 Efficiency 90 %
 Peak intensity 24.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

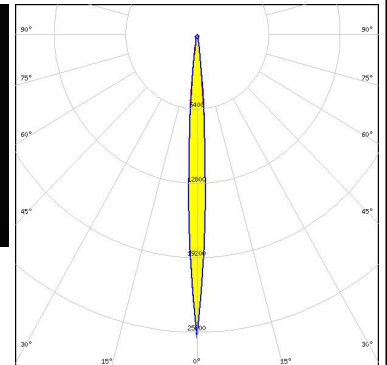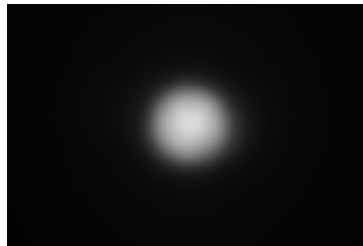

Light distribution files



LED XT-E
 FWHM / FWTM 10.0° / 22.0°
 Efficiency 84 %
 Peak intensity 14.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 C13333_MIRELLA-CL



Light distribution files

OPTICAL RESULTS (MEASURED):



LED XT-E
 FWHM / FWTM 11.0° / 24.0°
 Efficiency 85 %
 Peak intensity 9.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 C12479_MIRELLA-DL



Light distribution files




LED XT-E
 FWHM / FWTM 7.6° / 16.0°
 Efficiency 89 %
 Peak intensity 24 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:



Light distribution files



LED LUXEON 5050 Round LES
 FWHM / FWTM 11.0° / 21.0°
 Efficiency 93 %
 Peak intensity 11.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

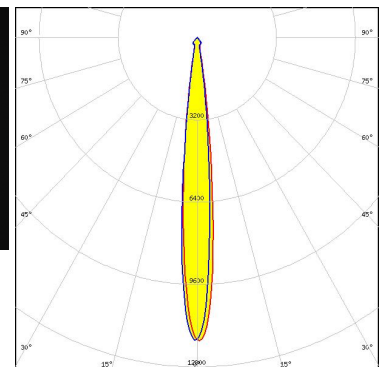

Light distribution files

OPTICAL RESULTS (MEASURED):



LED LUXEON A
FWHM / FWTM 12.0° / 28.0°
Efficiency 85 %
Peak intensity 8.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
C12479_MIRELLA-DL



Light distribution files



LED LUXEON A
FWHM / FWTM 8.9° / 18.0°
Efficiency 89 %
Peak intensity 20.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



Light distribution files



LED LUXEON A
FWHM / FWTM 10.0° / 22.0°
Efficiency 85 %
Peak intensity 14.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
C13333_MIRELLA-CL




Light distribution files

OPTICAL RESULTS (MEASURED):




LED LUXEON C
FWHM / FWTM 22.0° / 51.0°
Efficiency 81 %
Peak intensity 3.1 cd/lm
LEDs/each optic 4
Light colour/type RGBW
Required components:
C13723_MIRELLA-RZL

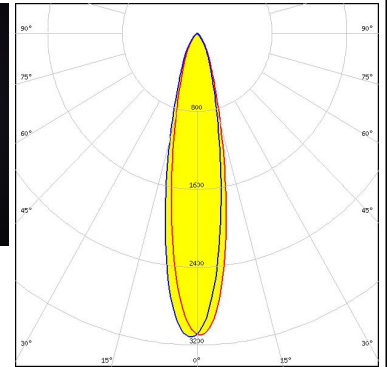

Light distribution files



LED LUXEON M/MX
FWHM / FWTM 12.0° / 26.0°
Efficiency 91 %
Peak intensity 10.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

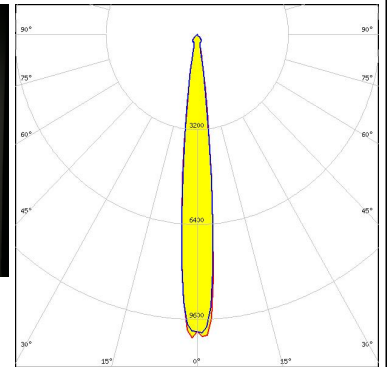

Light distribution files



LED LUXEON M/MX
FWHM / FWTM 15.0° / 30.0°
Efficiency 85 %
Peak intensity 7.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
C13333_MIRELLA-CL



OPTICAL RESULTS (MEASURED):



LED LUXEON M/MX
FWHM / FWTM 15.0° / 34.0°
Efficiency 86 %
Peak intensity 5.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
C12479_MIRELLA-DL



LED LUXEON MZ
FWHM / FWTM 8.7° / 18.0°
Efficiency 90 %
Peak intensity 19.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



Light distribution files



LED LUXEON MZ
FWHM / FWTM 11.0° / 26.0°
Efficiency 85 %
Peak intensity 9.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
C12479_MIRELLA-DL





Light distribution files

OPTICAL RESULTS (MEASURED):



LED LUXEON Z
FWHM / FWTM 18.0° / 51.0°
Efficiency 82 %
Peak intensity 3.4 cd/lm
LEDs/each optic 4
Light colour/type RGBW
Required components:
C13723_MIRELLA-RZL

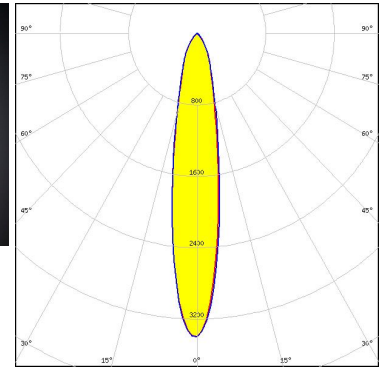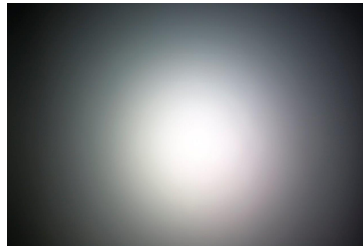

Light distribution files



LED NS9x383
FWHM / FWTM 9.2° / 15.0°
Efficiency 89 %
Peak intensity 17.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



Light distribution files



LED NS9x383
FWHM / FWTM 12.0° / 28.0°
Efficiency 85 %
Peak intensity 8.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
C12479_MIRELLA-DL





Light distribution files

OPTICAL RESULTS (MEASURED):



LED NV4x144A
FWHM / FWTM 13.0° / 24.0°
Efficiency 92 %
Peak intensity 9.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

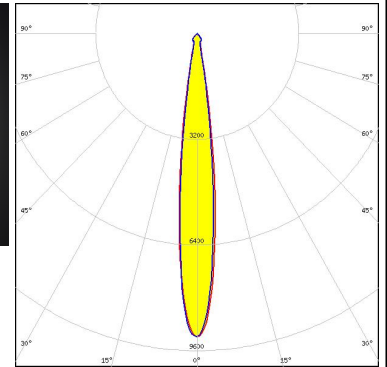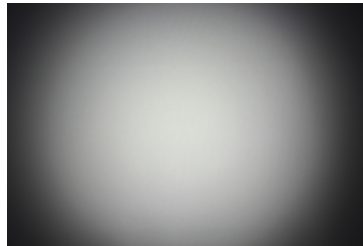

Light distribution files



LED Duris S8
FWHM / FWTM 11.0° / 22.0°
Efficiency 86 %
Peak intensity 11.6 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
 C13333_MIRELLA-CL



Light distribution files



LED Duris S8
FWHM / FWTM 9.7° / 20.0°
Efficiency 91 %
Peak intensity 16 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



Light distribution files

OPTICAL RESULTS (MEASURED):

OSRAM
Opto Semiconductors

LED Duris S8
FWHM / FWTM 12.0° / 28.0°
Efficiency 86 %
Peak intensity 8.3 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:
C12479_MIRELLA-DL



Light distribution files

OSRAM
Opto Semiconductors

LED OSLO Square EC
FWHM / FWTM 9.4° / 20.0°
Efficiency 85 %
Peak intensity 15.4 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:
C13333_MIRELLA-CL



Light distribution files

OSRAM
Opto Semiconductors

LED OSLO Square EC
FWHM / FWTM 11.0° / 26.0°
Efficiency 85 %
Peak intensity 9.7 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:
C12479_MIRELLA-DL




Light distribution files

OPTICAL RESULTS (MEASURED):

OSRAM
Opto Semiconductors


LED OSLON Square EC
 FWHM / FWTM 8.0° / 16.0°
 Efficiency 90 %
 Peak intensity 23.6 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

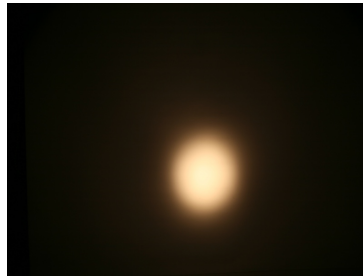

Light distribution files

OSRAM
Opto Semiconductors


LED Ostar-SMT RGB
 FWHM / FWTM 19.0° / 56.0°
 Efficiency 85 %
 Peak intensity 3.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 C13723_MIRELLA-RZL

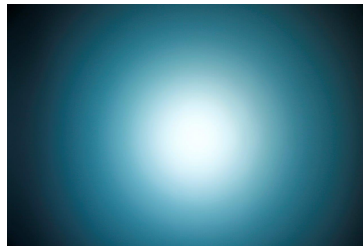

Light distribution files



SAMSUNG

LED LH508A
 FWHM / FWTM 12.0° / 22.0°
 Efficiency 90 %
 Peak intensity 10.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

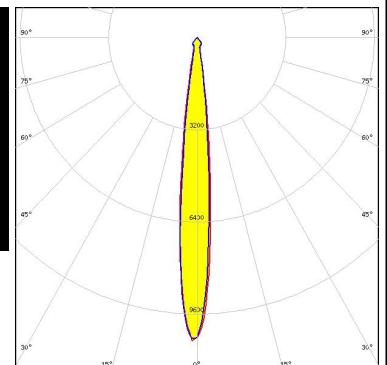

Light distribution files


OPTICAL RESULTS (MEASURED):

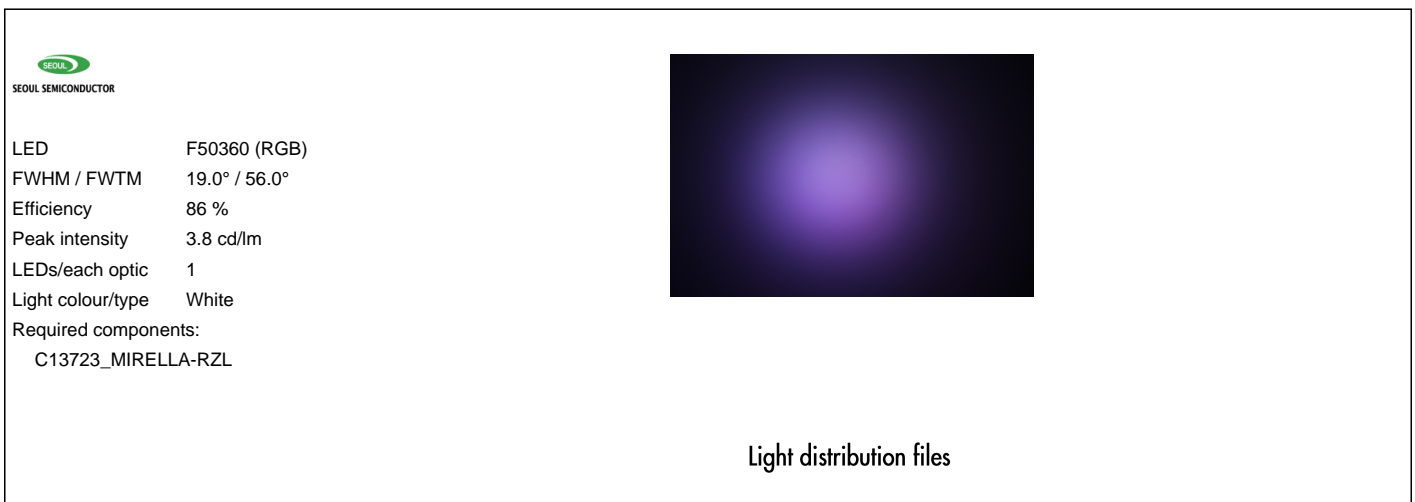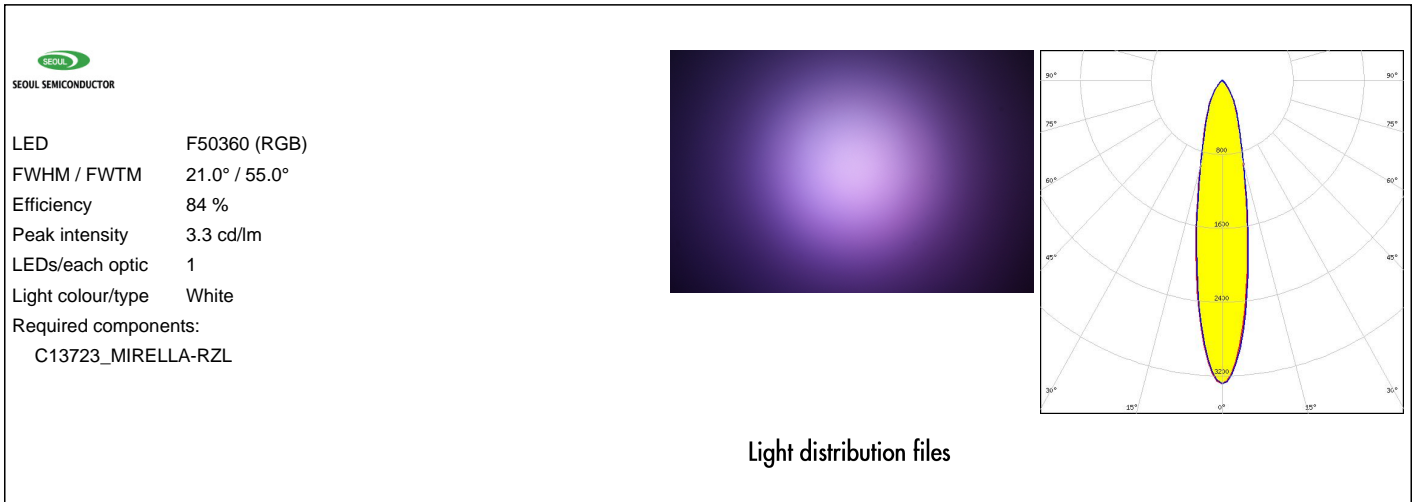

OPTICAL RESULTS (SIMULATED):




LED XHP35 HD
 FWHM / FWTM 11.0° / 20.0°
 Efficiency 92 %
 Peak intensity 11.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

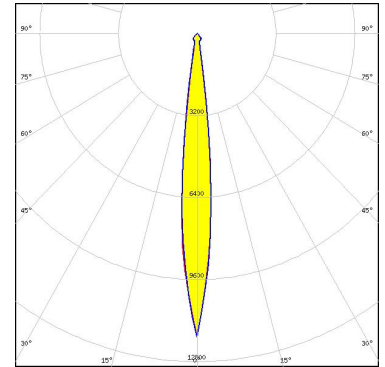

Light distribution files




LED LUXEON 5258
 FWHM / FWTM 9.0° / 19.0°
 Efficiency 91 %
 Peak intensity 17 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

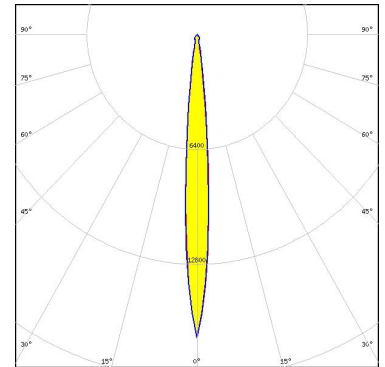


Light distribution files



LED OSCONIQ P 7070
 FWHM / FWTM 11.0° / 22.0°
 Efficiency 87 %
 Peak intensity 10.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 C13333_MIRELLA-CL



Detector Image: Illuminance
 21.4.2014
 Projection: 100% Surface: 1
 Size: 2000.000 (U) x 2000.000 (V) Illuminance: Pixels: 100 x 100 A: Total: 1000
 Max. Illuminance: 1.000000 Lumens/m²
 Total Power: 0.100000 Lumens

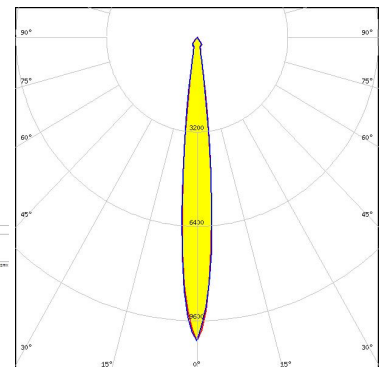

Light distribution files

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)