
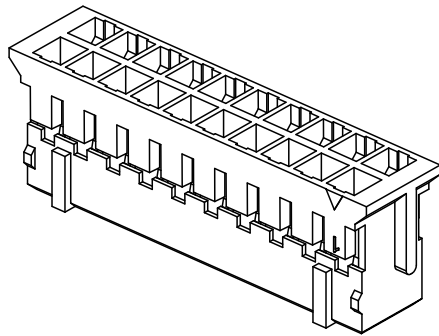

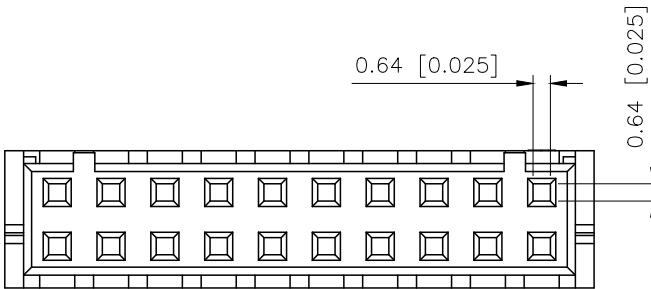
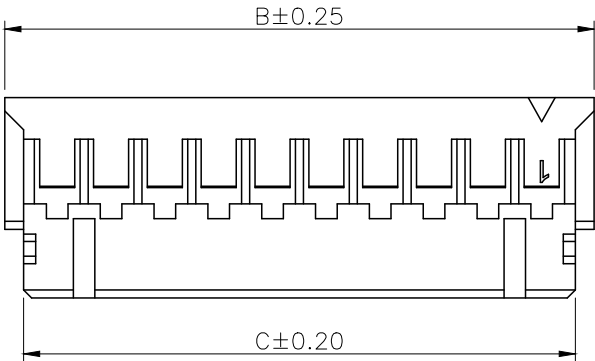


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.25	阿树

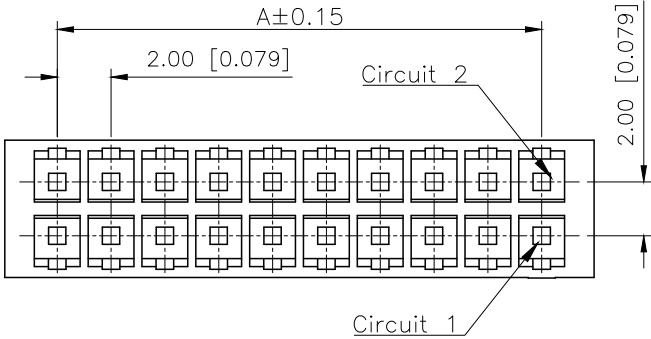

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC
- Current rating: 3A AC/DC
- Withstanding Voltage: 800V AC/minute
- Temperature range: -40°C ~ +125°C
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 10m\Omega$
- After environmental testing: $\leq 20m\Omega$

PART NO.:

X2026 H-2xXX HF-NO XX
① ② ③ ④ ⑤ ⑥

- ① Series No
② Category: H-HSG
③ Row No. Pin No: 2xXX-2x02~2x22Pin
④ Plug the Pin&special No:
HF-Halogen Free
⑤ Material: NO-PA66 94V-0
⑥ Color: Blank-Natural Color
BK-Black

poles	Dimensions(mm)			poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C		A	B	C
2x02	2.00	5.90	4.50	2x09	16.00	19.90	18.50	2x16	30.00	33.90	32.50
2x03	4.00	7.90	6.50	2x10	18.00	21.90	20.50	2x17	32.00	35.90	34.50
2x04	6.00	9.90	8.50	2x11	20.00	23.90	22.50	2x18	34.00	37.90	36.50
2x05	8.00	11.90	10.50	2x12	22.00	25.90	24.50	2x19	36.00	39.90	38.50
2x06	10.00	13.90	12.50	2x13	24.00	27.90	26.50	2x20	38.00	41.90	40.50
2x07	12.00	15.90	14.50	2x14	26.00	29.90	28.50	2x21	40.00	43.90	42.50
2x08	14.00	17.90	16.50	2x15	28.00	31.90	30.50	2x22	42.00	45.90	44.50

X2026H-2xXX-NOBK	Nylon 66 UL 94V-0 Black	X2026T	X2026W
X2026H-2xXXHF-NO	Nylon 66 UL 94V-0 Halogen Free		
X2026H-2xXX-NO	Nylon 66 UL 94V-0		
PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 2.00mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X2026H-2xXXHF-NO
APPROVED		SIZE: A4	DWG NO.: