


1 2 3 4 5 6 7 8 9

ROHS

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面		

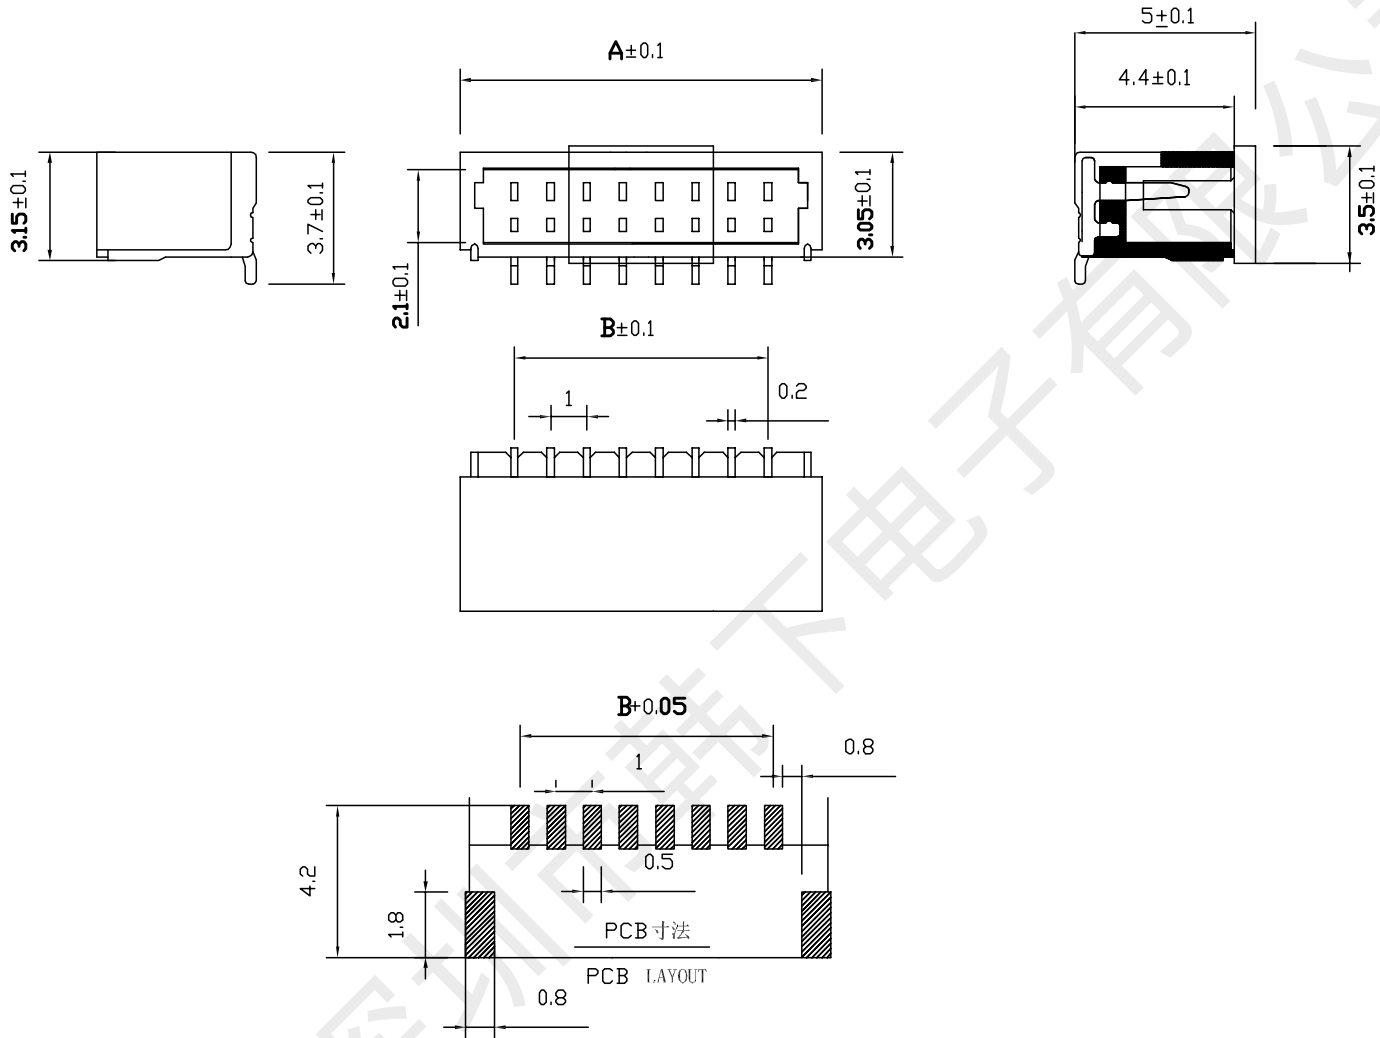

Specifications / 技术规格:
 Current rating: 1A
 额定电流: 1A
 Voltage rating: 50V AC,DC
 额定电压: 50V AC,DC
 Insulation Resistance: 500MΩ Min.
 绝缘电阻: 最小500MΩ
 Dielectric Withstanding: 500V AC 1Min
 耐电压: 500V AC 1分钟
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25° C 到 85° C

Materials / 材料:
 Contact Material: Brass(Sn plating)
 接触端子材料: 黄铜(镀锡)
 Insulation Material: LCP UL94 V-0
 绝缘体塑胶材质: LCP UL94V-0

P 数	DIM=A	DIM=B
2	4.00	1.00
3	5.00	2.00
4	6.00	3.00
5	7.00	4.00
6	8.00	5.00
7	9.00	6.00
8	10.00	7.00
9	11.00	8.00
10	12.00	9.00
11	13.00	10.00
12	14.00	11.00
13	15.00	12.00
14	16.00	13.00
15	17.00	14.00
16	18.00	15.00

韩下 HANXIA 深圳市韩下电子有限公司

GENERAL TOLERANCE	
X° ± 3°	.XXX : ±0.10
X° ± 2°	.XX : ±0.15
X° ± 1°	.X : ±0.25
XXX° ± 0.5°	X. : ±0.35

DESIGN:	黄彬	DATE:	2020.8.25
CHECKED:	张伟	DATE:	2020.8.25
AUDITED:		DATE:	
APPROVED:	罗小春	DATE:	2020.8.25

DWG. NO.	
PART NO.	HX SH-1.0-4PLT

TITLE:
针座

1 2 3 4 5 6 7 8 9