
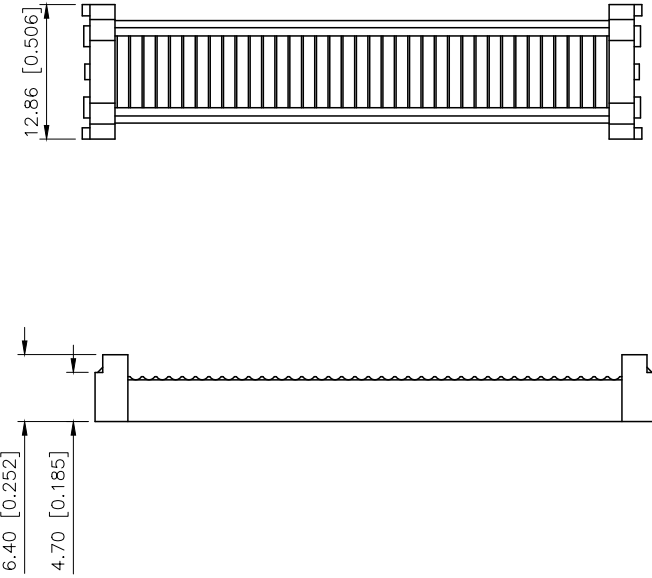


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.05.22	阿树

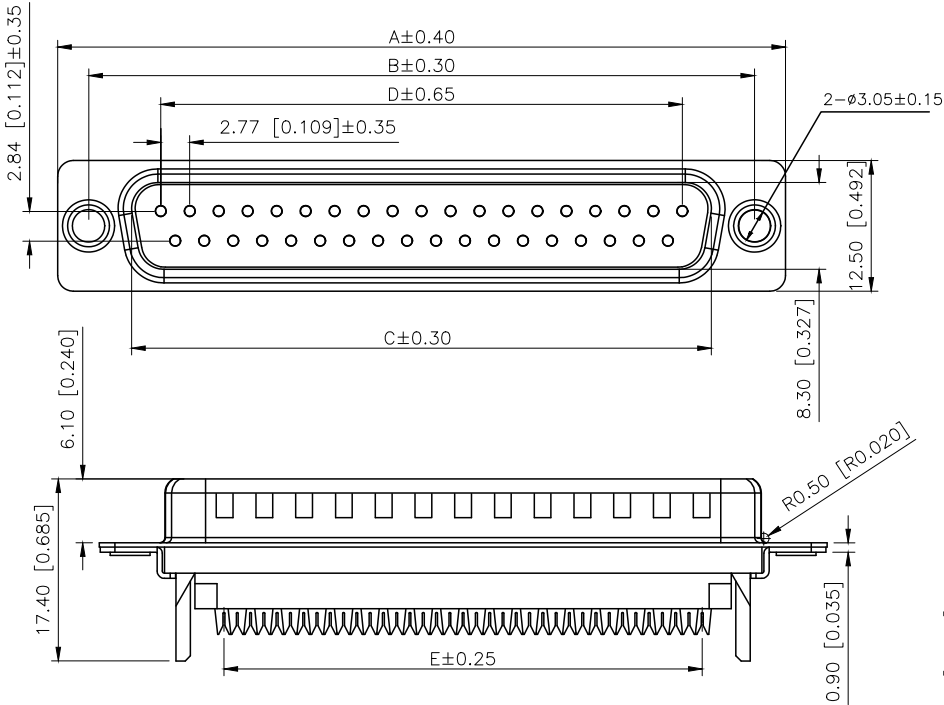

Specifications:
规格:
1.Voltage rating:250VAC/DC
额定电压: 250V AC/DC
2.Current rating:1A AC/DC
额定电流: 1A AC/DC
3.Withstanding voltage:500V AC/minute
耐受电压: $\geq 500V$ AC/分钟
4.Temperature range:-40℃-+105℃
温度范围: -40℃-+105℃
5.Insulation resistance:1000M Ω MIN
绝缘电阻: $\geq 1000M\Omega$
6.Contact resistance:20m Ω Max
接触电阻: $\geq 20m\Omega$
Material:
材料:
7.Rubber core:PBT UL94V-0
胶芯: PBT UL94V-0
8.The iron shell:SPCC Nivkel Plating/Tin Plating
铁壳: SPCC,镀镍/镀锡
B、成品不能有弯针, R角不一致等不良。


PART NO.:

X07 XX W X X X 1
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series NO.
②Row No.Pin No.XX-09;15;25;37
③Welding Board Angle :W-Male
④T: Tradutional C: Car-pin
⑤Planting Category: 1:1U' 2:2U' 3:3U' 4:5U'
5:15U' 6:30U' 7:AU5n
⑥Color:B-BLACK W-White BL-Blue
⑦1:TYPE-1;

NUMBER OF POSITIONS	DIMENSION				
	A ± 0.40	B ± 0.30	C ± 0.30	D ± 0.65	E ± 0.25
9	30.80	25.00	16.35	11.08	10.16
15	39.14	33.30	24.75	19.39	17.78
25	53.05	47.04	38.35	33.24	30.38
37	69.32	63.50	54.75	49.86	45.72

X07XXWXXX1	XDBLS	XDBLM
PART NO.	SCREW	NUT

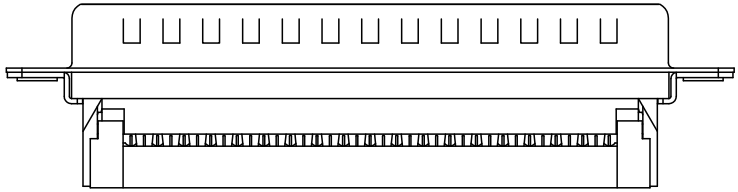

AUGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	D-SUB
CHECKED		UNIT:	mm/in	PART NO.:	X07XXWXXX1
APPROVED		SIZE:	A4	DWG NO.:	