


# CBB TM 12 2X6RC P-PT - Potential distributors



2801483

<https://www.phoenixcontact.com/us/products/2801483>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device circuit breaker boards for twelve CB TM1... thermomagnetic circuit breakers with group remote signaling, central supply, and potential distribution for up to five loads per channel.

## Commercial data

Item number	2801483
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CL04
Product key	CLA211
Catalog page	Page 262 (C-6-2013)
GTIN	4046356782333
Weight per piece (including packing)	787.7 g
Weight per piece (excluding packing)	780 g
Customs tariff number	85340090
Country of origin	DE

# CBB TM 12 2X6RC P-PT - Potential distributors



2801483

<https://www.phoenixcontact.com/us/products/2801483>

## Technical data

### Product properties

Product type	Device circuit breaker board
Type	DIN rail module, two-section, divisible
Number of positions	1
No. of channels	12

### Data management status

Article revision	04
------------------	----

### Insulation characteristics

Overvoltage category	II
Degree of pollution	2

### Electrical properties

Fuse type	Automatic device
Maximum load current	60 A (Complete main circuit)
Maximum current with single arrangement	12 A (per channel)

### General

Rated insulation voltage $U_i$	50 V DC
Rated surge voltage	0.5 kV
Short circuit stability	600 A (conditional according to DIN EN 50178)
Power dissipation	4.5 W (with even load on outputs with $I_N$ )
Insertion/withdrawal cycles	50

### Main circuit

Rated voltage	24 V DC
Rated current $I_N$	60 A DC (total) 12 A DC (per channel)

### Remote indication circuit

Rated voltage	24 V DC
Rated current $I_N$	1 A DC

### Connection data

Maximum load current	60 A (Complete main circuit)
----------------------	------------------------------

### Supply X21

Connection method	Push-in connection
Stripping length	18 mm
Conductor cross section flexible min.	0.75 mm <sup>2</sup>
Conductor cross section flexible max.	16 mm <sup>2</sup>
Conductor cross section, rigid min.	0.75 mm <sup>2</sup>
Conductor cross section, rigid max.	16 mm <sup>2</sup>

# CBB TM 12 2X6RC P-PT - Potential distributors

2801483

<https://www.phoenixcontact.com/us/products/2801483>


## Outputs X1 ... X12

Connection method	Push-in connection
Stripping length	10 mm
Conductor cross section flexible min.	0.2 mm <sup>2</sup>
Conductor cross section flexible max.	2.5 mm <sup>2</sup>
Conductor cross section, rigid min.	0.2 mm <sup>2</sup>
Conductor cross section, rigid max.	2.5 mm <sup>2</sup>

## Remote signaling X31

Connection method	Push-in connection
Stripping length	10 mm
Conductor cross section flexible min.	0.2 mm <sup>2</sup>
Conductor cross section flexible max.	2.5 mm <sup>2</sup>
Conductor cross section, rigid min.	0.2 mm <sup>2</sup>
Conductor cross section, rigid max.	2.5 mm <sup>2</sup>

## Dimensions

Dimensional drawing	
Width	252.5 mm
Height	127.8 mm
Depth	70.8 mm

## Material specifications

Color	gray (RAL 7042)
	black (RAL 9005)
Flammability rating according to UL 94	V0

## Mechanical properties

### Mechanical data

Open side panel	No
-----------------	----

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20 (Terminal blocks and fuse holders)
	IP00 (PCB)
Ambient temperature (operation)	-30 °C ... 60 °C (at In 60 A)
Ambient temperature (storage/transport)	-30 °C ... 80 °C

## Standards and regulations

Standards/specifications	DIN EN 50178
--------------------------	--------------

# CBB TM 12 2X6RC P-PT - Potential distributors



2801483

<https://www.phoenixcontact.com/us/products/2801483>

Note	1997
------	------

## Mounting

Mounting type	DIN rail: 35 mm
Mounting position	horizontal


# CBB TM 12 2X6RC P-PT - Potential distributors

2801483


<https://www.phoenixcontact.com/us/products/2801483>

## Drawings


### Application drawing

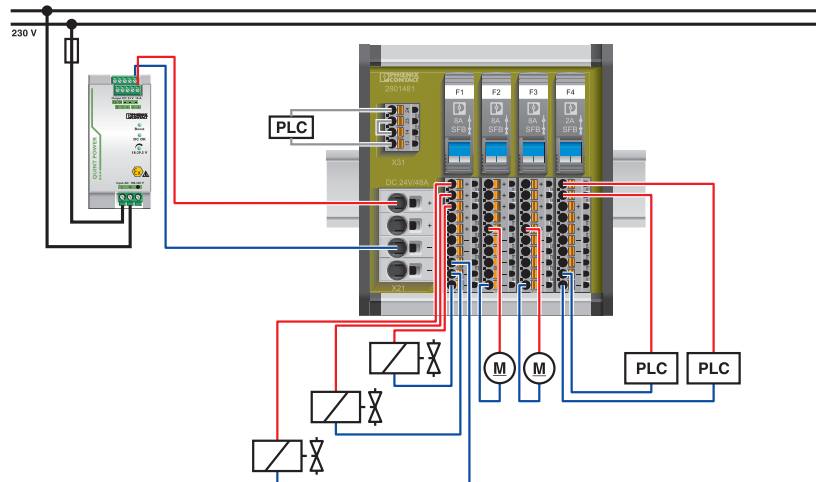

### Dimensional drawing

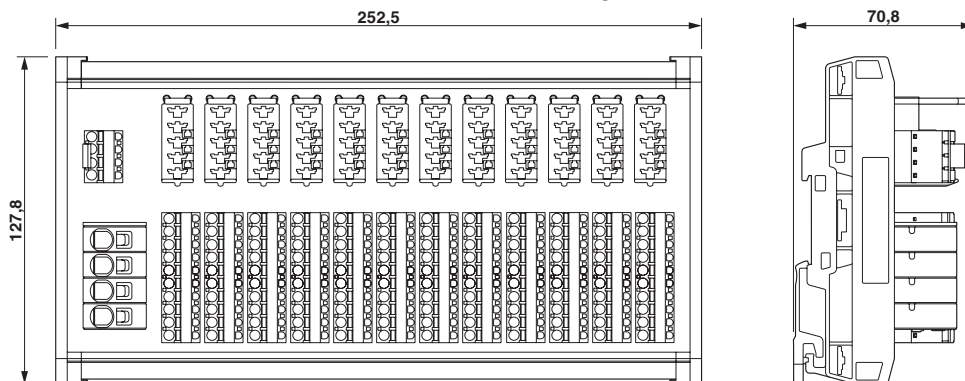

### Circuit diagram

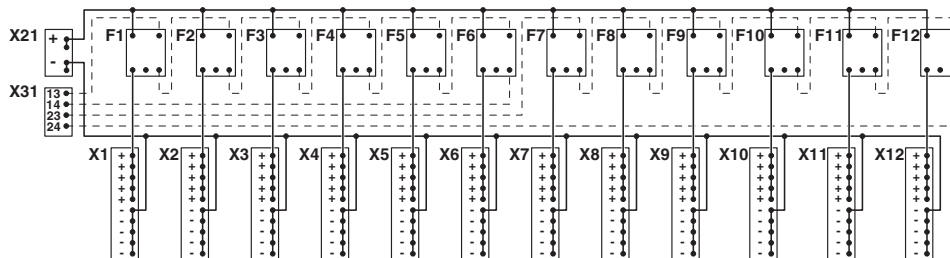

# CBB TM 12 2X6RC P-PT - Potential distributors



2801483

<https://www.phoenixcontact.com/us/products/2801483>

## Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2801483>



**EAC**

Approval ID: EAC-Zulassung



**EAC**

Approval ID: RU C-DE.\*09.B.00169



**EAC**

Approval ID: RU C-DE.A\*30.B01546

# CBB TM 12 2X6RC P-PT - Potential distributors



2801483

<https://www.phoenixcontact.com/us/products/2801483>

## Classifications

### ECLASS

ECLASS-11.0	27371392
ECLASS-12.0	27371392
ECLASS-13.0	27371392

### ETIM

ETIM 9.0	EC002498
----------	----------

### UNSPSC

UNSPSC 21.0	39121100
-------------	----------

# CBB TM 12 2X6RC P-PT - Potential distributors



2801483

<https://www.phoenixcontact.com/us/products/2801483>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)